

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ1111 into FRJ11001	05/JUN/18	KATE	ERIC





SPECIFICATIONS

Electrical

Current Rating: 1.5A AC(rms)/DC
 Voltage Rating: 125V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 1000V AC r.m.s
 Operating Temperature: -40°C ~ +85°C

Material

Housing: PBT UL 94V-0
 Contact: Gold Plating Over Nickel
 PC Plug should bear 10N Pulling Force Without 750Times Min

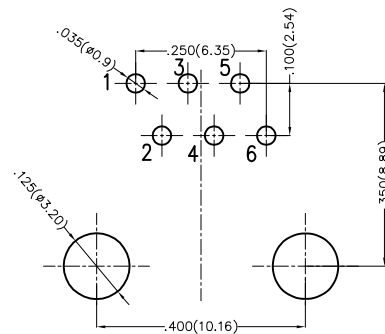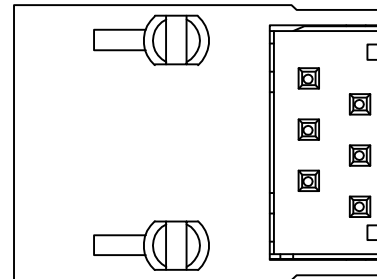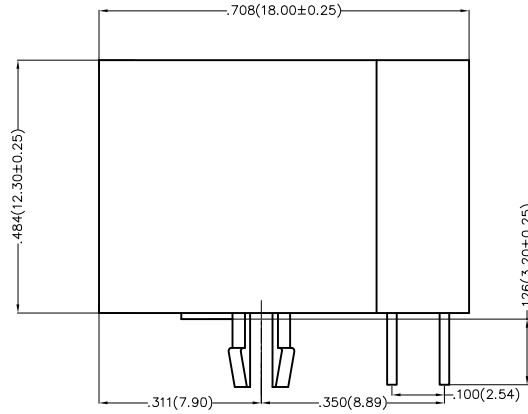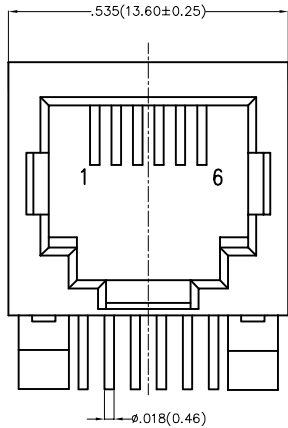

Recommended P.C.Board Layout

Ordering Information

FRJ11 001 — 1 1 XX K6 K 2 0
 1 2 3 4 5 6 7 8

1 Category FRJ11-RJ11 Connector	2 Distinction No. 001	3 Ports options 1-1 Port	4 Plating 1-Gold Plated
5 Thickness of plating 00-Gold flash 03-3μ" Custom plate available	6 Color-Resin K6-Black	7 Packaging K-Tray	8 Contact type 2-Round pin

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED) X.±.012(0.30) X:±5' X.X±.008(0.20) .X:±2' X.XX±.006(0.15) .XX:±1' X.XXX±.004(0.10) .XXX:±0.5'		APPROVE BY FRANK CHECKED BY CHERRY DRAWN BY JACOB	DATE 1/AUG/13 DATE 1/AUG/13 DATE 1/AUG/13	PART NO. △ FRJ11001-11XXK6K20 TITLE RJ11 Connector 6P6C 90° Angle	ITEM NO. FRJ11001	<p>Leader Of Industry</p>
	DESIGN UNITS Inch (metric)	SCALE 5:1	SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	

1 2 3 4 5 6 7 8