

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ45154 into FRJ45003	31/MAY/18	Vandy	Eric


SPECIFICATIONS

Electrical

Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ Min.
 Withstanding Voltage: DC 1000V/ AC 700V
 Operating Temperature: -40°C~+85°C

Material and plating

Inner insulator: PBT (UL 94V-0), Red
 Housing: Thermoplastic (UL 94V-0), Black
 Contact: Phosphor Bronze/ Gold plated

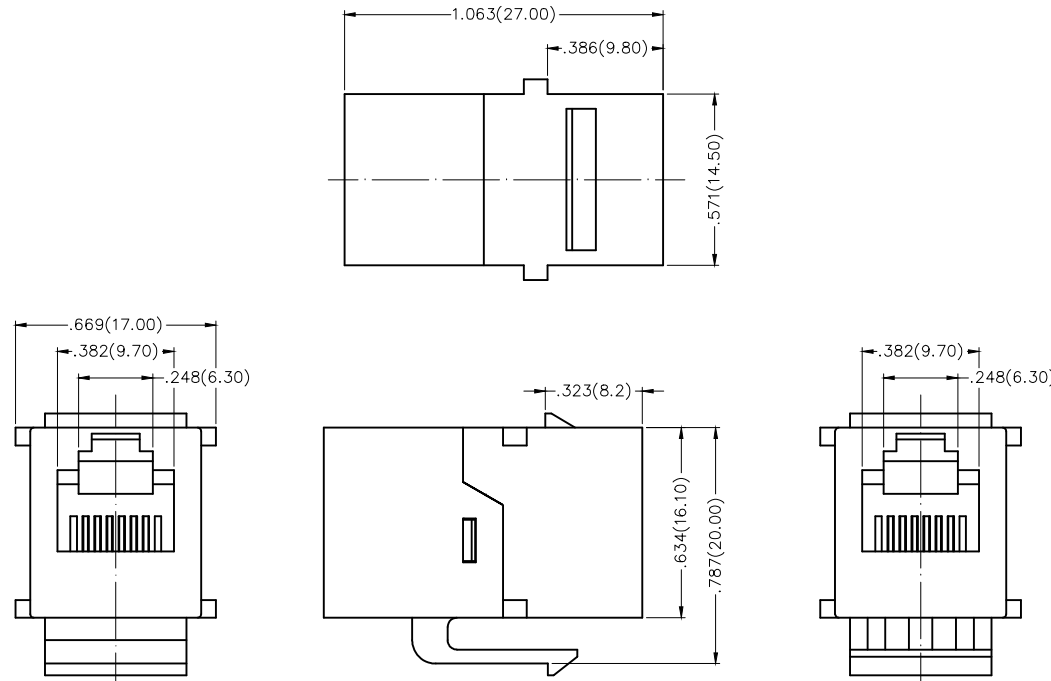

Ordering Information

FRJ45 003 - 1 1 XX K6 K 0 1 0 0
 1 2 3 4 5 6 7 8

1	Category FRJ45-RJ45 Connector	2	Distinction No. 003	3	Ports options 1-1 Port	4	Plating 1-Gold Plated
5	Thickness of plating 00-Gold flash 03-3μ" Custom plate available	6	Color-Resin K6-Black	7	Packaging K-Tray	8	Contact type 1-Square pin

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 21/JUN/15	PART NO. △ FRJ45003-11XXK6K0100	ITEM NO. FRJ45003	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±.014(0.35) X.X±.012(0.30)	X.*±5" .X*±2"	CHECKED BY CHERRY	DATE 21/JUN/15	TITLE RJ45 connector - Adapter 6P6C	
SCALE 5:1	SIZE A4	X.XX±.008(0.20) X.XXX±.004(0.10)	.XX*±1" .XX*±0.5"	DRAWN BY KATE	DATE 21/JUN/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	