
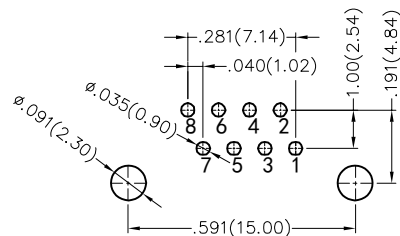
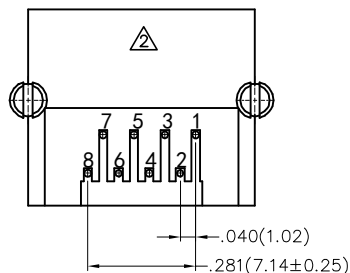
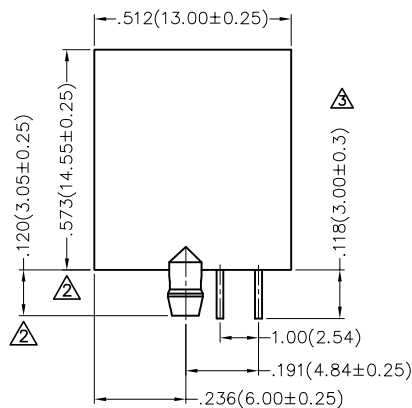


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ45143 into FRJ45017	31/MAY/18	KATE	ERIC
2	△	Change the structure and dimensions	14/MAY/20	KATE	CHERRY
3	△	Change dimension	08/JUN/24	MATT	LEO

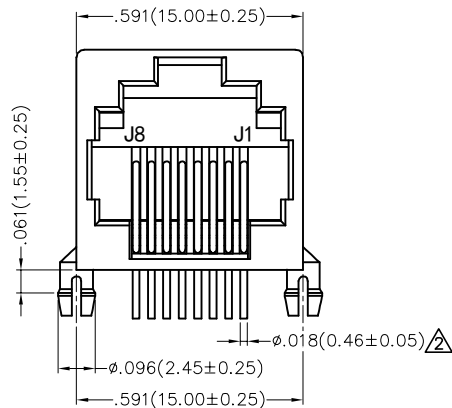

Recommended P.C.Board Layout

Electrical

Current Rating: 1.5A AC(rms)/DC  
Voltage Rating: 125V AC(rms)/DC  
Contact Resistanc: 30 mΩ Max  
Insulation Resistance: 500 MΩ MIN  
Withstanding Voltage: 1000V AC r.m.s  
Operating Temperature: -45°C~+85°C


Material

Housing: PBT (UL 94V-0)  
Contact: Phosphor Bronze/Gold Plated

Ordering Information

FRJ45 017 — 1 1 XX XX K 0 2 0 0  
1 2 3 4 5 6 7 8

1	Category FRJ45-RJ45 Connector	2	Distinction No. 017	3	Ports options 1-1 Port	4	Plating 1-Gold Plated	5	Thickness of plating 00-Gold flash 03-3μ" Custom plate available
6	Color-Resin G1-Gray K6-Black	7	Packaging K-Tray	8	Contact type 2-Round pin				

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 30/JUN/17	PART NO. △ FRJ45017-11XXXXK0200	ITEM NO. FRJ45017	 Leader Of Industry		
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X'±5" .X'±2" .XX'±1" .XXX'±0.5'	CHECKED BY CHERRY	DATE 30/JUN/17	TITLE RJ45 Connector 8P8C 90° Angle (DIP)			
SCALE 5:1	SIZE A4		DRAWN BY LXF	DATE 30/JUN/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			REV 3	SHEET NO. 1/1