
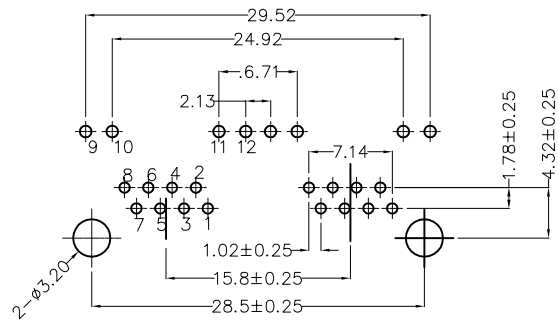

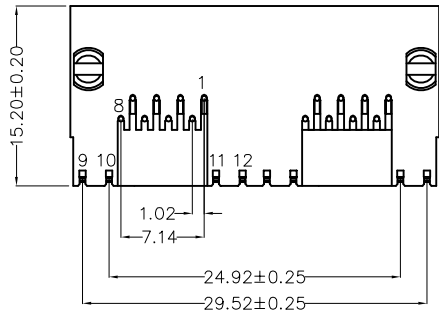



1	2	3	4	5	6	7	8
REV	LOCATIONS		DESCRIPTION	DATE	REVISER	APPD	

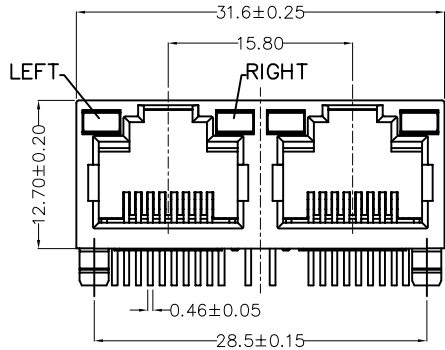

Recommended P.C.Board Layout

**SPECIFICATIONS**

Electrical Performances

- Current Rating: 1.5A AC(rms)/DC
- Voltage Rating: 125V AC(rms)/DC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 500 MΩ MIN
- Withstanding Voltage: 1000V AC r.m.s

Material and Plating

- Housing: PBT UL 94V-0
- Contact: Phosphor Bronze/Gold Plated


Environmental Characteristics

- Temperature Range-Operating: -20°C~+85°C

Ordering Information

FRJ45 184 - 2 1 XX BK K X 2 0 0  
 1 2 3 4 5 6 7 8 9

1 Category FRJ45-RJ45 Connector	2 Distinction No. 184	3 Ports options 2-2 Ports	4 Plating 1-Gold Plated	5 Thickness of plating 00-Gold flash 03-3μ" Custom plate available
6 Color-Resin BK-Black	7 Packaging K-Tray	8 LED style 1-L: Yellow R: Green 2-L: Green R: Yellow	9 Contact type 2-Round pin	

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 31/MAY/22	PART NO. FRJ45184-21XXBKX200	ITEM NO. FRJ45184	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±0.12(0.30) X.X±.008(0.20)	X:±5° .X'±2'	CHECKED BY CHERRY	DATE 31/MAY/22	TITLE RJ45 Connectors 8P8C 90°Angle	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX'±1° .XXX'±0.5'	DRAWN BY STAR	DATE 31/MAY/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	