
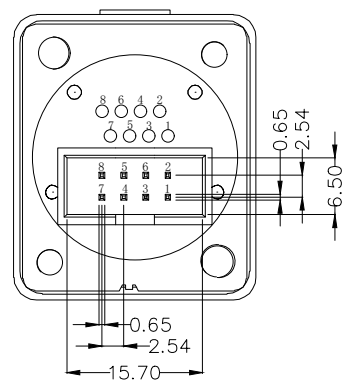


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A  
B  
C  
D  
E  
F



A  
B  
C  
D  
E  
F

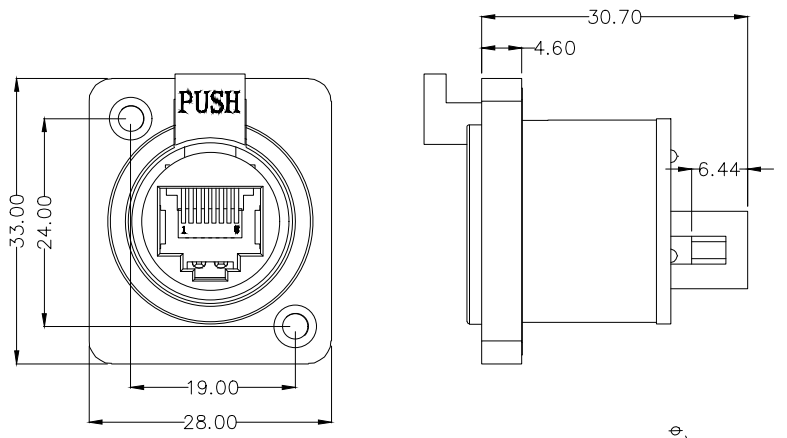

**SPECIFICATION**

**Electrical**  
 Current Rating: 1.5A AC(rms)/DC  
 Voltage Rating: 50V AC(rms)/DC  
 Contact Resistance: 10 mΩ Max  
 Insulation Resistance: 500 MΩ MIN  
 Withstanding Voltage: 1000V AC r.m.s  
 Temperature Range-Operating: -30°C~+80°C  
 Frequency Range: 1-100MHz  
 IP Rating: IP65


**Material**  
 Housing: PA66, (UL 94V-0)  
 Terminal: Bronze/Gold plated  
 Metal Panel: Zinc Alloy/Nickel plating  
 Handle: SUS/Nickel plating  
 Spring steel: Mn Steel/Nickel plating  
 Dust Cap: Silicone (50%)

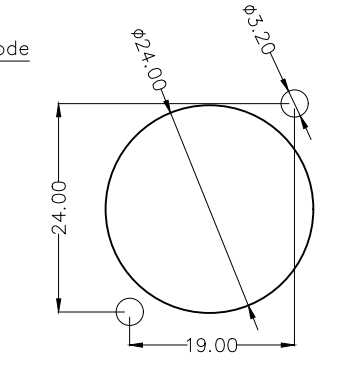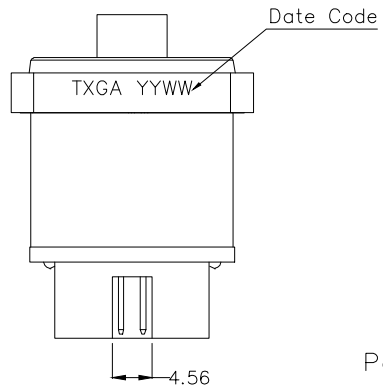

Panel cut out (rear side)

**Ordering Information**

FRJ45	228	-	1	1	XX	BK	K	0	1	0	0
1	2		3	4	5	6	7		8		
1	Category	2	Distinction No.	3	Ports options	4	Plating				
	FRJ45-RJ45 Connector		228		1-1 Ports		1-Gold plated				
5	thickness of Gold Plating	6	Color-Resin	7	Packaging	8	Contact type				
	01-1u"		BK-Black		K-Tray		1-Square pin				

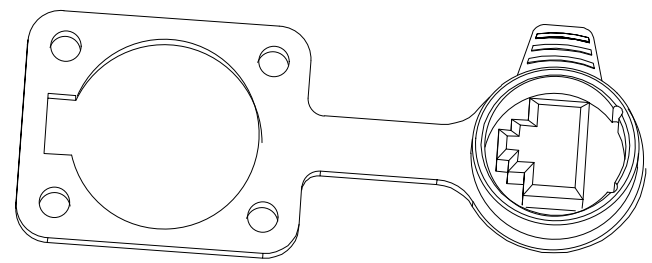

Soft rubber accessories

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY</p> <p>LEO</p>	<p>DATE</p> <p>19/Sept/23</p>	<p>PART NO.</p> <p>FRJ45228-11XXBKK0100</p>	<p>ITEM NO.</p> <p>FRJ45228</p>	<p><b>TXGA</b> Building Technology Cornerstone</p>
	X. ±0.30	X.' ±5°	CHECKED BY	DATE	<p>TITLE</p> <p>RJ45 Connector-Adapter 8P8C Vertical(180°) Self-lock</p>		
<p>DESIGN UNITS METRIC(mm)</p>	X.X ±0.20	X.X' ±2°	GISELLE	19/Sept/23	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>		
<p>SCALE</p> <p>5:1</p>	<p>SIZE</p> <p>A4</p>	X.XX ±0.15	X.XX' ±1°	DRAWN BY	DATE		
		X.XXX ±0.10	X.XXX' ±0.5°	Hejianpeng	19/Sept/23		

1 2 3 4 5 6 7 8