

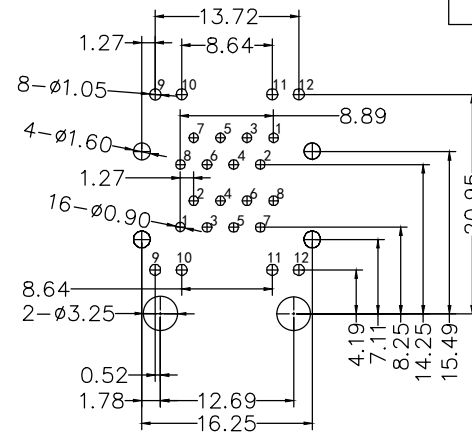


6		7		8	
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Recommended P.C.Board Layout

General tolerances: ± 0.05







LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85~2.45V
Yellow	585nm	20mA	1.7~2.2V

Ordering Information

<u>FRJ45</u>	<u>255</u>	—	<u>2</u>	<u>1</u>	<u>XX</u>	<u>BK</u>	<u>K</u>	<u>1</u>	<u>2</u>	<u>0</u>	<u>0</u>
1	2		3	4	5	6	7	8	9		

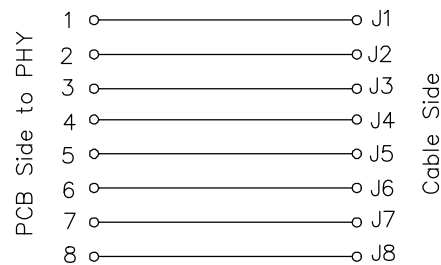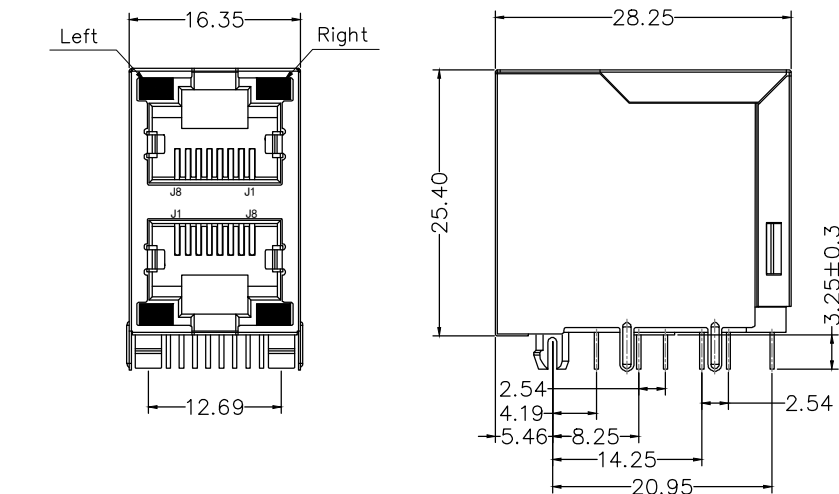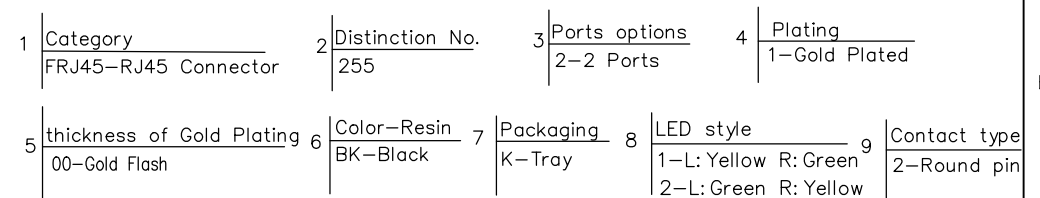

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY		DATE		PART NO.		ITEM NO.		 Building Technology Cornerstone			
				LEO		19/Sept/23		FRJ45255-2100BKK1200		FRJ45255					
DESIGN UNITS METRIC(mm)		X. ± 0.30		X.' $\pm 5^{\circ}$		CHECKED BY		DATE		TITLE		REV 0		SHEET NO. 1/1	
		X.X ± 0.20		X.X' $\pm 2^{\circ}$		GISELLE		19/Sept/23							
		X.XX ± 0.15		X.XX' $\pm 1^{\circ}$		DRAWN BY		DATE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
X.XXX ± 0.10		X.XXX' $\pm 0.5^{\circ}$		Hejianpeng		19/Sept/23									