


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

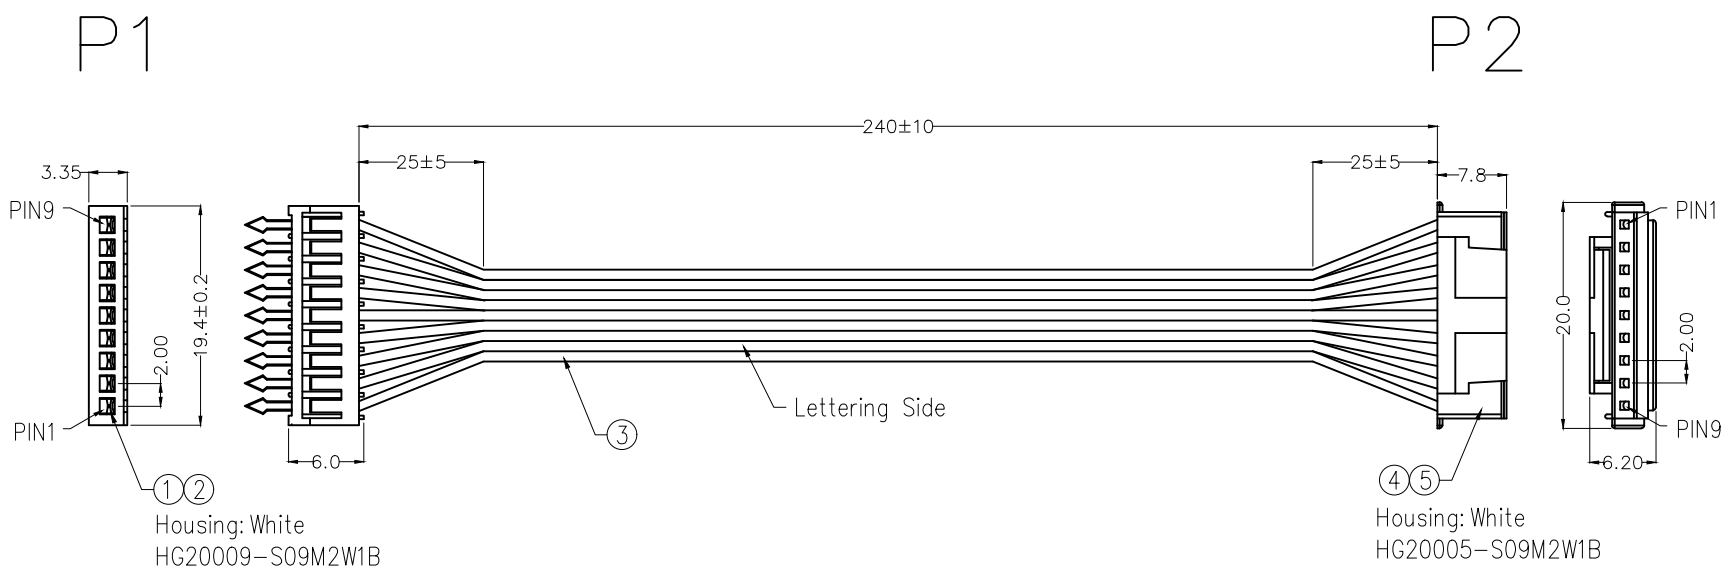

**PIN ASSIGNMENT**

P1		P2
PIN1	————	PIN9
PIN2	————	PIN8
PIN3	————	PIN7
PIN4	————	PIN6
PIN5	————	PIN5
PIN6	————	PIN4
PIN7	————	PIN3
PIN8	————	PIN2
PIN9	————	PIN1

**Electrical**

1. Withstanding Voltage:DC 300V
2. Conduction impedance:3Ω (MAX)
3. Insulation Resistance:10MΩ (MIN)

**Packing specification**

1. Protecting the JC terminals With covering foams on the P1 end.
2. 25pcs/Bundle, 200pcs/Bag, 1400pcs/Box

\* Note:All Materials Meet The "RoHs" !

5	Pitch 2.00mm Terminal: T20004-F2H
4	Pitch 2.00mm Housing (White): HG20005-S09M2W1B
3	UL2468 26AWG(7/0.16TS) 9C Flat Cable White: 2468-26-09W1-UL
2	Pitch 2.00mm Terminal: T20008-M2H
1	Pitch 2.00mm Housing (White): HG20009-S09M2W1B
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	07/APR/15	FSP10127-0009W1N240B-01	FSP10127	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X±2'	CHECKED BY	DATE	TITLE		REV 0    SHEET NO. 1/1
SCALE	X.XX±.006(0.15)	.XX±1'	CHERRY	07/APR/15	Housing: HG20009-9P To HG20005-9P L=240mm		
SIZE	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
5:1	A4		KATE	07/APR/15			