


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

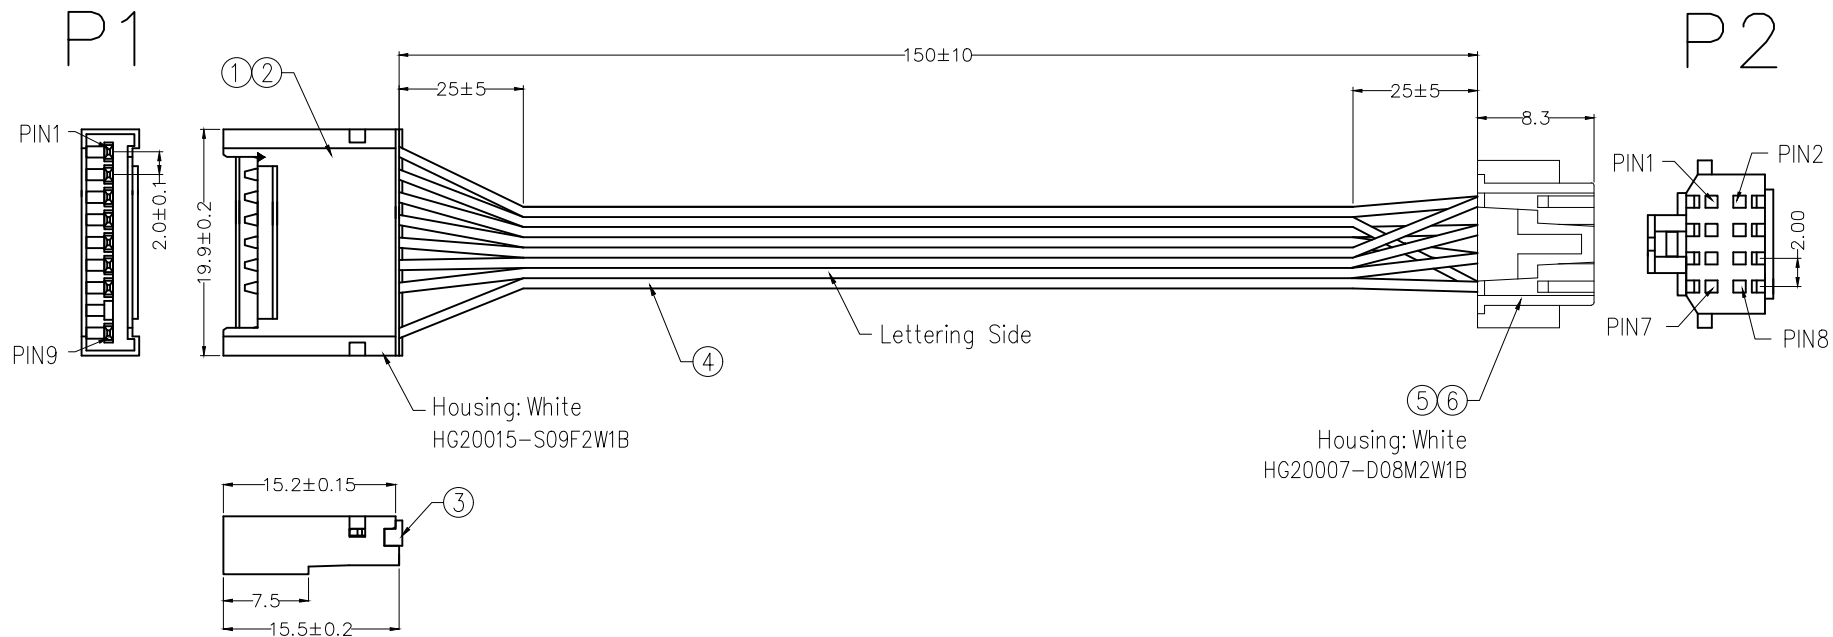

PIN ASSIGNMENT

P1	P2
PIN1	PIN2
PIN2	PIN8
PIN3	PIN4
PIN4	PIN6
PIN5	PIN1
PIN6	PIN3
PIN7	PIN5
PIN8	
PIN9	PIN7

Electrical

- Withstanding Voltage: DC 300V
- Conduction impedance: 3Ω (MAX)
- Insulation Resistance: 10MΩ (MIN)

Packing specification

- 25pcs/Bundle, 200pcs/Bag, 1600pcs/Box

* Note: All Materials Meet The "RoHs" !

6	Pitch 2.00mm Terminal: T20006-F2H
5	Pitch 2.00mm Housing (White): HG20007-D08M2W1B
4	UL2468 26AWG(7/0.16TS) 8C Flat Cable White: 2468-26-08W1-UL
3	Pitch 2.00mm Module Connector (Red): HY-9R
2	Pitch 2.00mm Terminal: T20015-M2H
1	Pitch 2.00mm Housing (White): HG20015-S09F2W1B
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/NOV/15	PART NO. FSP10464	ITEM NO. FSP10464	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.X±0.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 18/NOV/15	TITLE Housing: HG20015-9P To HG20007-8P L=150mm		REV 0
SCALE 5:1	SIZE A4	X.XX±0.006(0.15)	DRAWN BY KATE	DATE 18/NOV/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			