


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

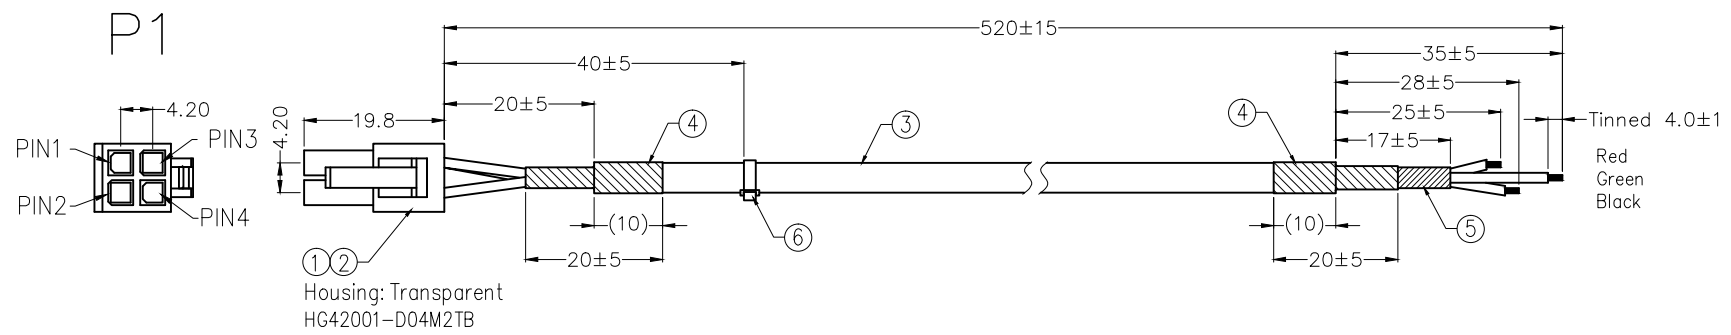

- Electrical
- Withstanding Voltage: DC 300V
  - Conduction impedance: 3Ω (MAX)
  - Insulation Resistance: 10MΩ (MIN)

- Packing specification
- 25pcs/Bundle, 200pcs/Bag

PIN ASSIGNMENT

P1

PIN1 ——— Black

PIN3 ——— Red

PIN4 ——— Green

\* Note: All Materials Meet The "RoHs" !

⑥	White Cable Tie 2.5*80mm: R-3PB-09
⑤	Black Heat Shrink Tube Ø2.5mm: R-4HA-17
④	Black Heat Shrink Tube Ø5.0mm: R-4HA-06
③	UL2464 26AWG(7/0.16TS) 3C(Green/Black/Red)+AL Jacket Gray (Cool Gray 8U) OD=5.0mm: 2464-26-03G1-UL
②	Pitch 4.20mm Terminal (Female): T42001-F2H-1
①	Pitch 4.20mm Housing (Transparent): HG42001-D04M2TB
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X. ±0.30	X.* ±5'	FRANK	04/AUG/16	FSP10698-00520	FSP10698	
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
SCALE 5:1 SIZE A4	X.XX ±0.15	X.XX' ±1'	CHERRY	04/AUG/16	MULTI-CONDUCTOR CABLE		
	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			VERNON	04/AUG/16			