


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

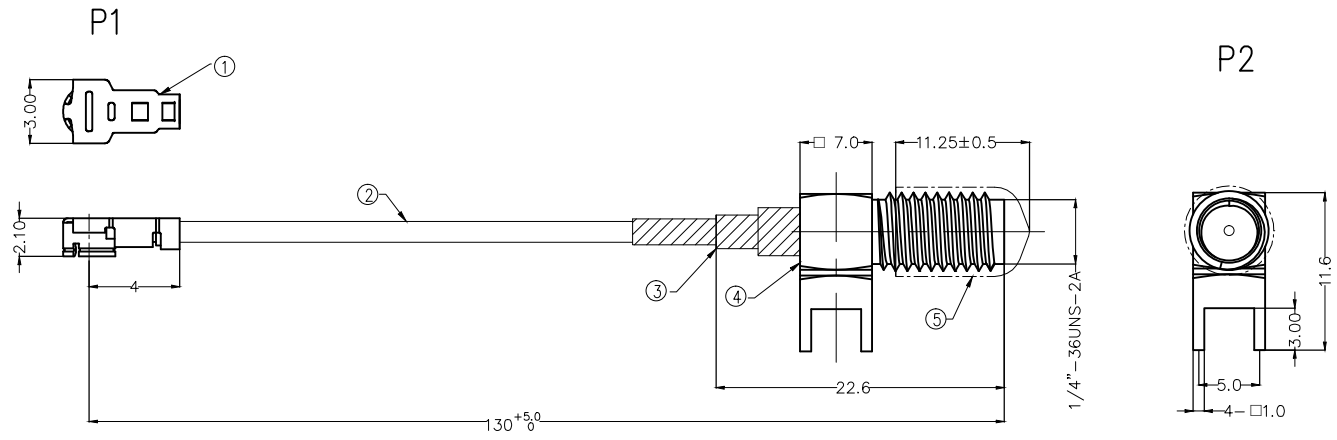

Electrical

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)


Packing specification

1. 50pcs/Bundle, 250pcs/Bag

* Note: All Materials Meet The "RoHs" !

⑤	Red insulating sheath
④	RF TNC connector, Gold plated: RF05002-PEB103MA
③	Black Heat Shrink Tube ø3.5mm
②	Coaxial cable: RG178 Jack gray, OD=1.25mm
①	RF MHF I Plug: RF05002-PEB103MA
NO.	Specification

PIN ASSIGNMENT



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±0.12(0.30)	X.±5'	FRANK	20/JUL/17	FSP11051-00130	FSP11051	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 0
SCALE	X.XX±.006(0.15)	.XX'±1'	DRAWN BY	DATE	MICROWAVE CABLE ASSEMBLIES		SHEET NO. 1/1
5:1	X.XXX±.004(0.10)	.XXX'±0.5'	LXF	20/JUL/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		