





1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

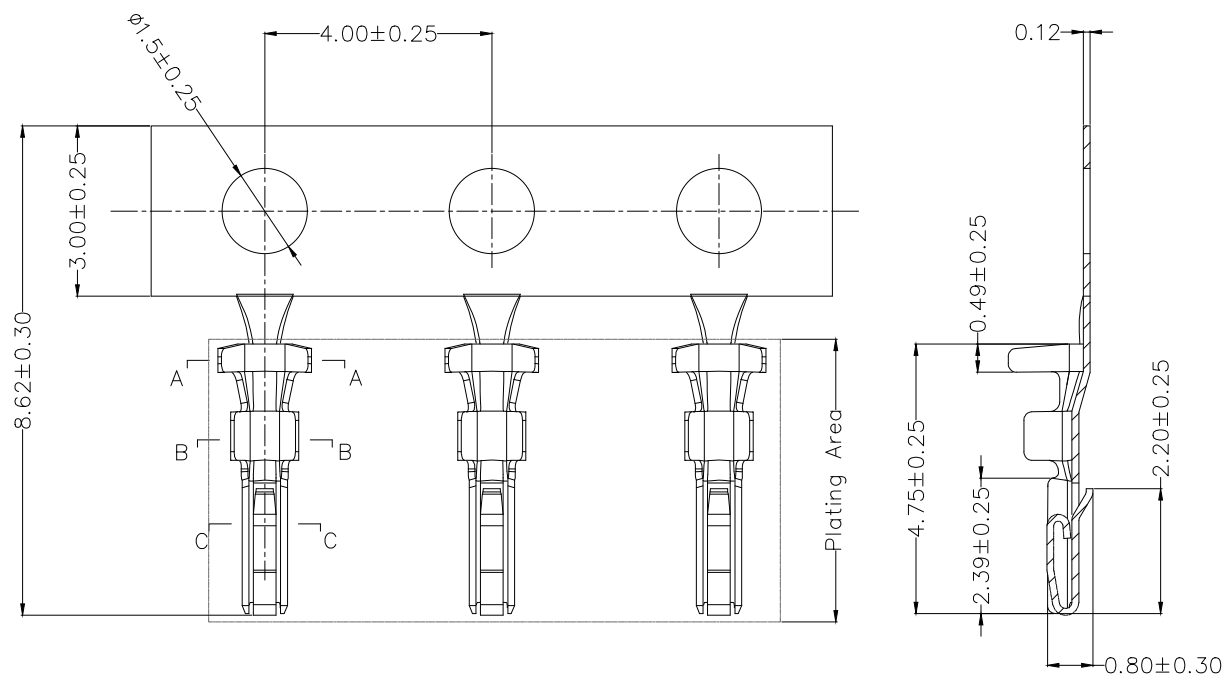

SPECIFICATIONS

Electrical
 Current Rating: 1A AC/DC
 Voltage Rating: 50V AC/DC
 Contact Resistance: ≤20mΩ (Initial) per contact, ≤40mΩ Change allowed.
 Insulation Resistance: 100 MΩ MIN
 Withstanding Voltage: 500V AC/MINUTE
 Temperature Range—Operating: -25°C ~ +85°C
 Apply to gauge: 32AWG~28AWG (O.D 0.6mm MAX)
 Material: Copper Alloy, Tin-Plated
 Mates With Housing: FHG10008 Series



<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5'	LEO	03/NOV/21	FT10007-F8H	FT10007		
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/2
	SCALE 5:1	SIZE A4	GISELLE	03/NOV/21	Wire to Board Pitch 1.00mm (Terminal)		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE			
		X.XXX ±0.10	X.XXX' ±0.5'	PYD	03/NOV/21			

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A





B

C

D

E

F

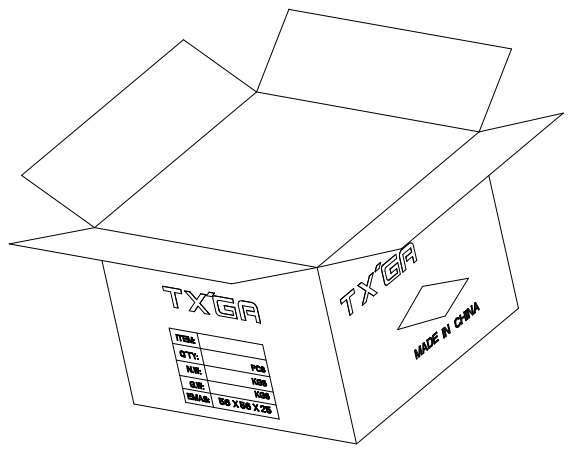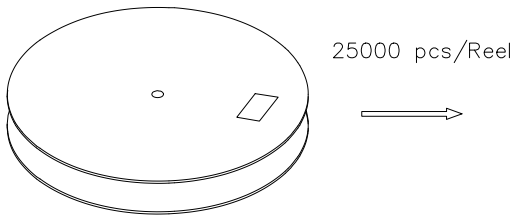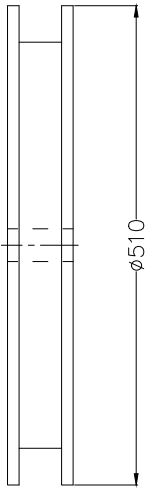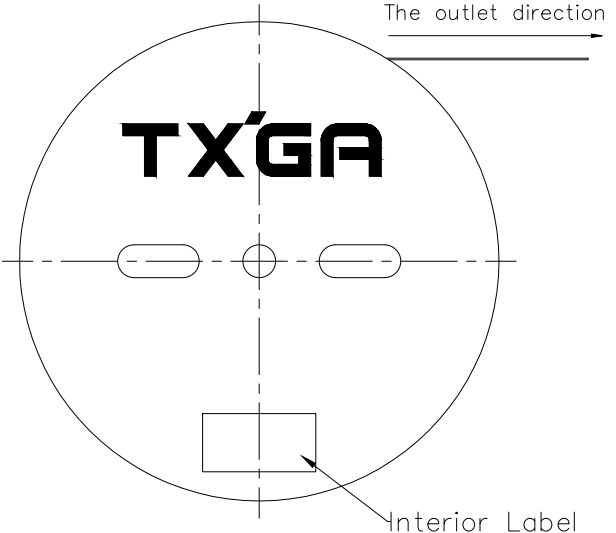

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>
	X. ±0.30	X.* ±5'	LEO	03/NOV/21	FT10007-F8H	FT10007	
	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		
	X.XX ±0.15	X.XX' ±1'	GISELLE	03/NOV/21	Wire to Board Pitch 1.00mm (Terminal)		
SCALE	SIZE	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			PYD	03/NOV/21	REV 0	SHEET NO. 2/2

1 2 3 4 5 6 7 8