



1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

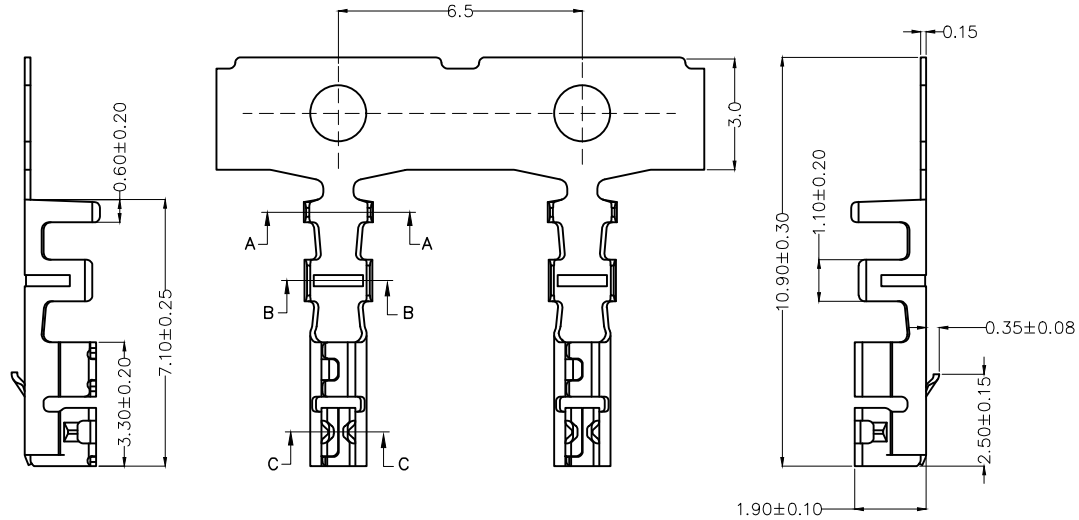

SPECIFICATIONS

Current Rating: 3.0A AC(rms)/DC
 Voltage Rating: 125V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ MIN
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range—Operating: -40°C~+105°C
 Material: Phosphor Bronze C5191
 Wire Range: 26AWG~22AWG
 Applicable Housing: FHG20019 Series
 Minimum Order Quantity : 12000 pcs

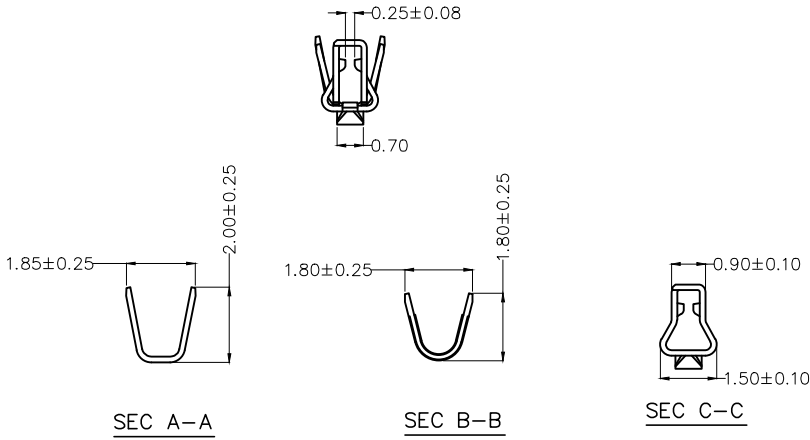

Ordering Information

FT 200 19 — F 2 H
 1 2 3 4 5 6

1	Category	2	Series Number	3	Distinction No.	4	Type	5	Plating	6	Packaging
	FT—Terminal		200—Pitch2.00mm		19		F—Female		2—Tin Plated		H—Paper Axis

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>
	X. ±0.30	X.' ±5'	LEO	17/SEP/23	FT20019—F2H	FT20019	
DESIGN UNITS METRIC(mm)	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		REV 0
SCALE	X.XX ±0.15	X.XX' ±1'	GISELLE	17/SEP/23	Wire to Board Pitch 2.0mm(Terminal)		SHEET NO. 1/2
SIZE	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
5:1			NICK	17/SEP/23			

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A




B

C


D

E

F

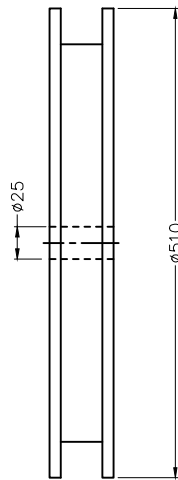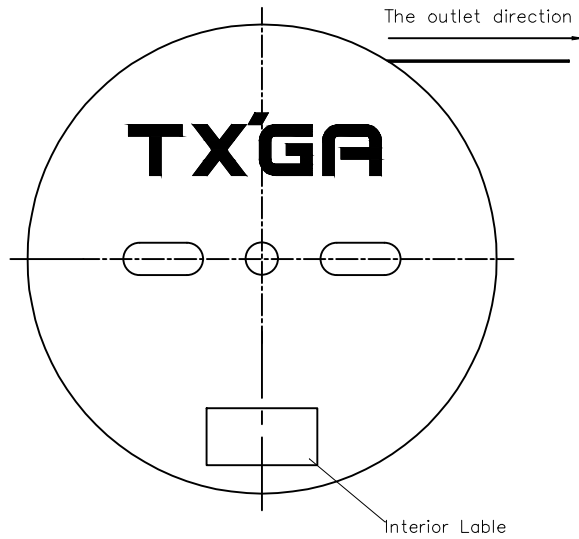

12,000 Pcs/Reel

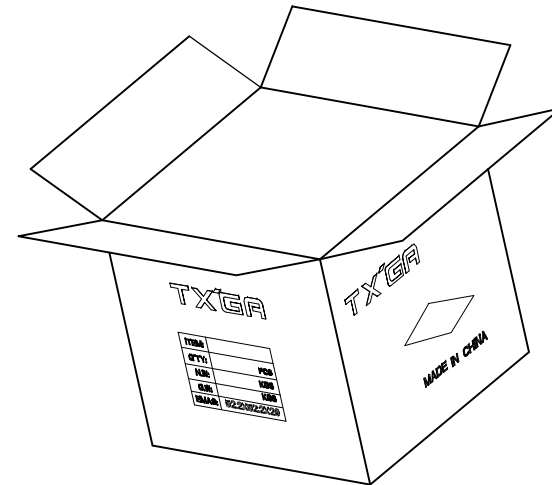

A

B

C

D

E

F

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 17/SEP/23	PART NO. FT20019-F2H	ITEM NO. FT20019	<p>Building Technology Cornerstone</p>
	X. ±0.30	X.' ±5'	CHECKED BY GISELLE	DATE 17/SEP/23	TITLE Wire to Board Pitch 2.0mm(Terminal)		
DESIGN UNITS METRIC(mm)	X.X ±0.20	X.X' ±2'	DRAWN BY NICK	DATE 17/SEP/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	X.XXX ±0.10	X.XXX' ±0.5"		

1 2 3 4 5 6 7 8