

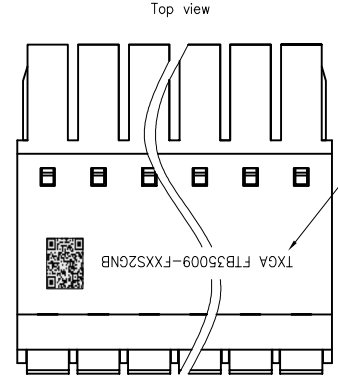
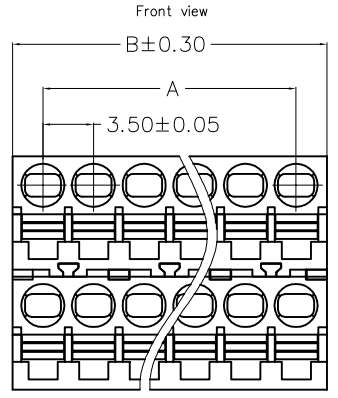


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

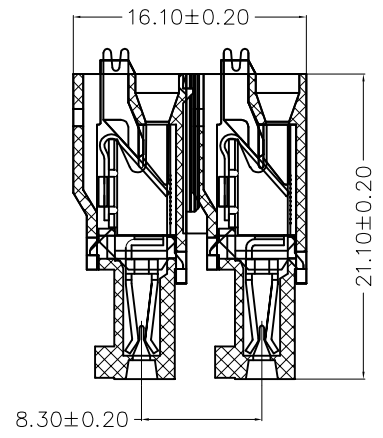

Circuits (n)	Part No.	Dimensions (mm)	
		A	B
2	FTB35009-F02S2GNB	0	4.20
4	FTB35009-F04S2GNB	3.50	7.70
6	FTB35009-F06S2GNB	7.00	11.20
8	FTB35009-F08S2GNB	10.50	14.70
10	FTB35009-F10S2GNB	14.00	18.20
12	FTB35009-F12S2GNB	17.50	21.70
14	FTB35009-F14S2GNB	21.00	25.20
16	FTB35009-F16S2GNB	24.50	28.70
18	FTB35009-F18S2GNB	28.00	32.20
20	FTB35009-F20S2GNB	31.50	35.70
22	FTB35009-F22S2GNB	35.00	39.20
24	FTB35009-F24S2GNB	38.50	42.70

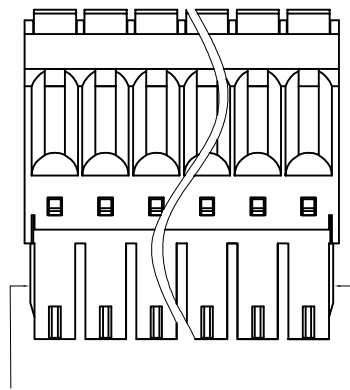

2Circuits to 12Circuits with wedge,above 14Circuits without wedge(including 14Circuits)

Ordering Information

FTB 350 09 - F XX S 2 GN B
1 2 3 4 5 6 7 8 9

SPECIFICATIONS

Electrical
 Current Rating: 12A AC(rms)/DC
 Voltage Rating: 300V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ Min
 Withstanding Voltage: 2500V AC r.m.s
 Wire range: 16~24AWG

Environmental
 Operating Temperature: -40°C~+105°C

Material and plating
 Housing: PA66 (UL 94V-0)
 Contacts: Copper Alloy/Tin plated
 Spring clamp: Stainless steel

1	Category FTB-Terminal Block	2	Series Number 350-Pitch3.50mm	3	Distinction No. 09	4	Type F-Female		
5	Circuits XX	6	Entry Angle S-180° Vertical	7	Material-Resin 2-PA66	8	Color-Resin GN-Green	9	Packaging B-Bag

 THIRD ANGLE PROJECTION DESIGN UNITS METRIC SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FTB35009-FXXS2GNB	ITEM NO. FTB35009	 Building Technology Cornerstone	
	X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Terminal Block Pitch 3.5mm 180° Vertical			REV 0
	X.X ±0.20	X.X* ±2°	DRAWN BY YYQ	DATE 30/JAN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			