
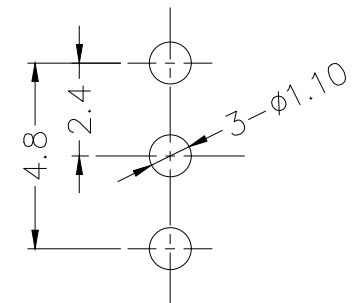
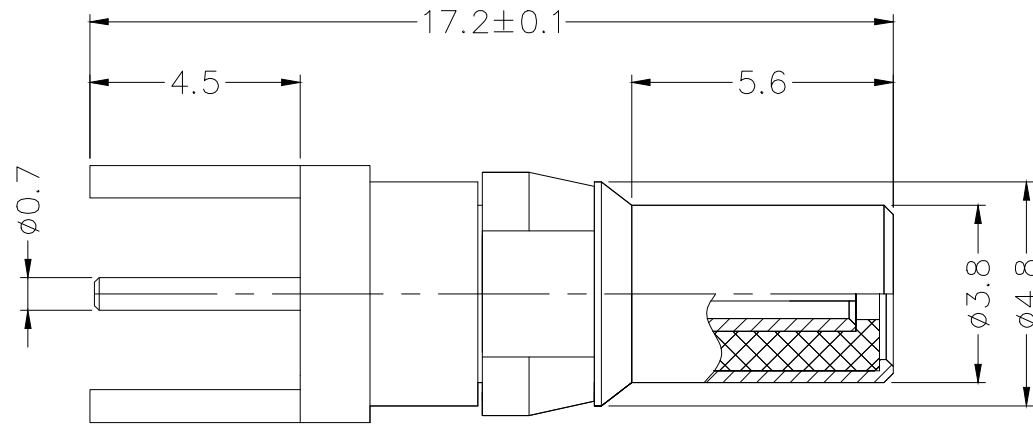


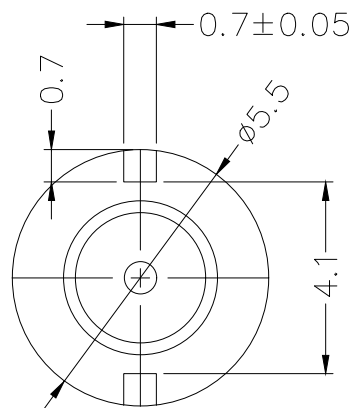

Recommended P.C.Board Layout

SPECIFICATION

Technical Parameters

Temperature range: $-55\sim+125^{\circ}\text{C}$;
 Characteristic impedance: 50Ω ;
 Frequency range: $\text{DC}\sim 2\text{GHz}$;
 Voltage Rating: 250V rms ;
 Dielectric withstanding voltage: 1000V rms ;
 Insulation resistance: $\geq 1000\text{M}\Omega$;
 VSWR: $\leq 1.06(\text{DC}\sim 0.1\text{GHz})$
 $\leq 1.22(\text{DC}0.1\sim 0.5\text{GHz})$
 $\leq 1.5(\text{DC}0.5\sim 2\text{GHz})$

Inner Conductor Contact Resistance: $10\text{m}\Omega$ MAX;
 Outer Conductor Contact Resistance: $5\text{m}\Omega$ MAX;

Mechanical

Durability: 500 cycles

Material and Plating

Insulators: PTFE(UL 94V-0), White
 Contact: Phosphor Bronze, Gold plated
 Body: Brass, Gold plated
 Snap Ring: Phosphor Bronze, Ni plated

FTDC 05 - M 50 S 1 XX S W
 1 2 3 4 5 6 7 8 9

1	Category FTDC-D-Sub coaxial contact	2	Distinction No. 05	3	Gender M-Male	4	Impedence 50-500hm	5	Contact S-Socket
6	Plating 1-Gold Plated	7	Plating Thickness 01-0.025μm 03-0.075μm 04-0.125μm 06-0.25μm 07-0.375μm 08-0.75μm	8	Angle S-180°Vertical	9	Termination type D-Through Hole		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 04/JAN/22	PART NO. FTDC05-M50S1XXSD	ITEM NO. FTDC05	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE D-Sub Coaxial Contact Plug 180° Vertical PCB Through Hole			
DESIGN UNITS mm		X.X ±0.20	X.X' ±2°	GISELLE	04/JAN/22			REV 0	
		X.XX ±0.15	X.XX' ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5°	PYD	04/JAN/22				