


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical  
 Current Rating: 0.5A AC(rms)/DC  
 Voltage Rating: 60V AC(rms)/DC  
 Withstanding Voltage: 200V AC r.m.s  
 Temperature Range-Operating: -40°C~+85°C

Recommended storage condition  
 Temperature: 15°C~25°C  
 Humidity: 30~60%(RH)

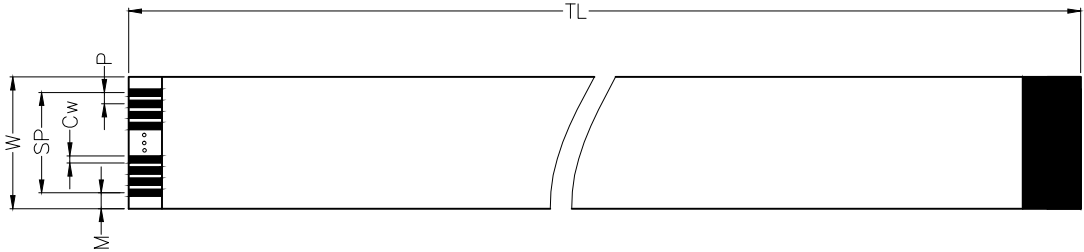

Drawing	Item	Dimension
N	Number of conductors	12
P	Pitch	0.50±0.05
SP	Total Pitch	5.5±0.07
W	Total Width	6.5±0.07
TL	Total Length	70±2.0
M	Margin Width	0.5±0.07
T	Terminal Thickness	0.30±0.05
Ct	Conductor Thickness	0.035
Cw	Conductor Width	0.30±0.025
S1	Strip length	3.0±0.5
S2	Strip length	3.0±0.5
S3	Supporting Tape Length	6.0±0.5
S4	Supporting Tape Length	6.0±0.5
Tt	Thickness insulation	0.12±0.03
Supporting Tape Thickness		0.225mm
PET(Insulation)		0.043mm (20624)
PET(Insulation)		0.043mm White

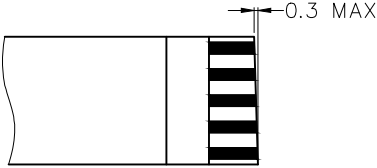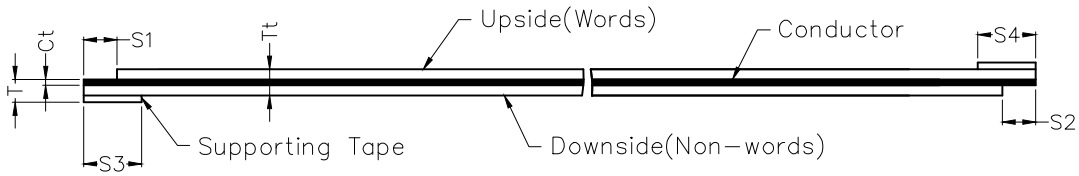

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY VERNON	DATE 27/SEP/18	PART NO. FTS050012-N070B-01	ITEM NO. FTS050012	<p>Leader Of Industry</p>
	X. ±0.30	X.' ±5°	CHECKED BY CHERRY	DATE 27/SEP/18	TITLE FLEXIBLE FLAT CABLE		
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2°	DRAWN BY KATE	DATE 27/SEP/18	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°	X.XXX ±0.10	X.XXX' ±0.5°	FLEXIBLE FLAT CABLE	

1 2 3 4 5 6 7 8