
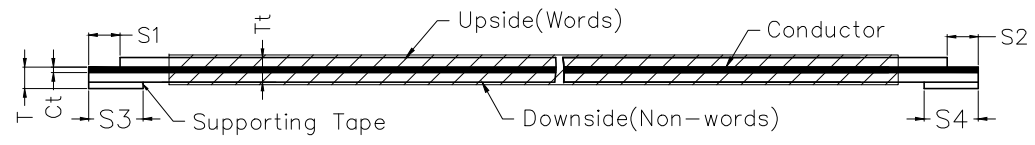


REV	LOCATIONS	DESCRIPTION	DATE	REVISOR	APPD


SPECIFICATIONS

Electrical
 Current Rating: 0.5A AC(rms)/DC
 Voltage Rating: 60V AC(rms)/DC
 Withstanding Voltage: 200V AC r.m.s
 Temperature Range-Operating: -40°C~+85°C

Recommended storage condition
 Temperature: 15°C~25°C
 Humidity: 30~60%(RH)

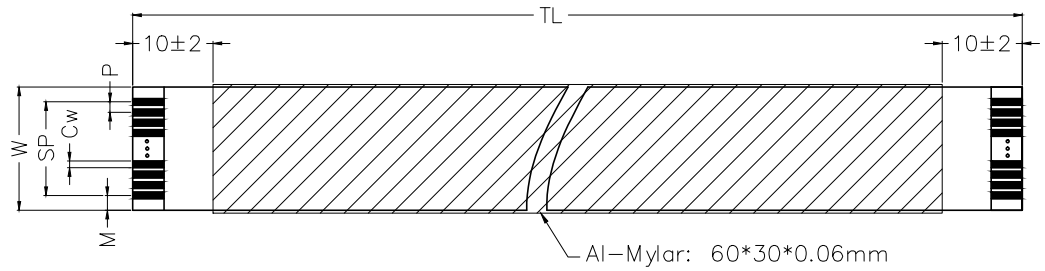

Drawing	Item	Dimension
N	Number of conductors	24
P	Pitch	0.50±0.05
SP	Total Pitch	11.5±0.07
W	Total Width	12.5±0.07
TL	Total Length	80±3.0
M	Margin Width	0.5±0.07
T	Terminal Thickness	0.30±0.05
Ct	Conductor Thickness	0.035
Cw	Conductor Width	0.30±0.025
S1	Strip length	3.0±0.5
S2	Strip length	3.0±0.5
S3	Supporting Tape Length	6.0±1.0
S4	Supporting Tape Length	6.0±1.0
Tt	Thickness insulation	0.12±0.03
Supporting Tape Thickness		0.225mm
PET(Insulation)		0.043mm (20624)
PET(Insulation)		0.043mm White

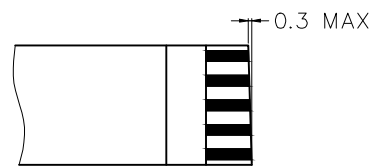

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X. ±0.30	X.* ±5'	VERNON	25/NOV/15	FTS050024-N080A-01	FTS050024	
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
SCALE 5:1 SIZE A4	X.XX ±0.15	X.XX' ±1'	CHERRY	25/NOV/15	FLEXIBLE FLAT CABLE		
	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			KATE	25/NOV/15			