


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical
 Current Rating: 1.0A AC(rms)/DC
 Voltage Rating: 100V AC(rms)/DC
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range-Operating: -40°C~+80°C

Recommended storage condition
 Temperature: 15°C~25°C
 Humidity: 30~60%(RH)

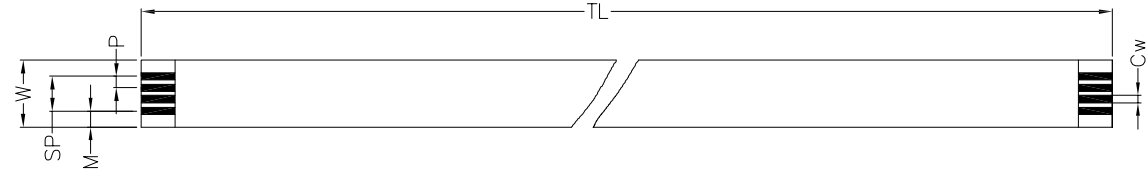

Drawing	Item	Dimension
N	Number of conductors	4
P	Pitch	1.00±0.10
SP	Total Pitch	3.0±0.15
W	Total Width	5.0±0.20
TL	Total Length	80±2
M	Margin Width	1.00±0.15
T	Terminal Thickness	0.30±0.05
Ct	Conductor Thickness	0.035
Cw	Conductor Width	0.65±0.025
S1	Strip length	4.0±0.5
S2	Strip length	4.0±0.5
S3	Supporting Tape Length	8.0±1.0
S4	Supporting Tape Length	8.0±1.0
Tt	Thickness insulation	0.12±0.05
Supporting Tape Thickness		0.225mm
PET(Insulation)		0.043mm (20624)
PET(Insulation)		0.043mm White

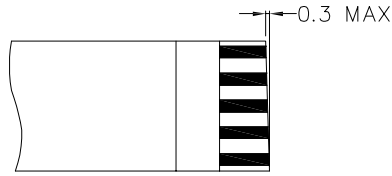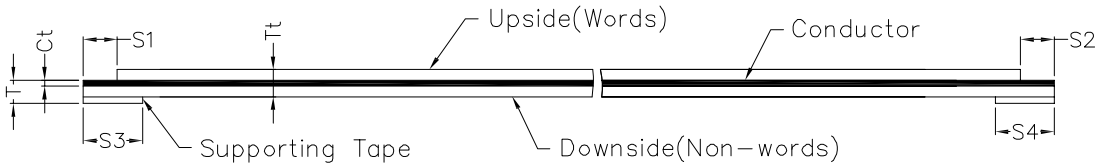

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X. ±0.30	X.' ±5'	FRANK	25/MAY/20	FTS100004-N080A-01	FTS100004	
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		FLEXIBLE FLAT CABLE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
SCALE 5:1	X.XX ±0.15	X.XX' ±1'	CHERRY	25/MAY/20	REV 0	SHEET NO. 1/1	
SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE			
			ZOEY	25/MAY/20			