



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

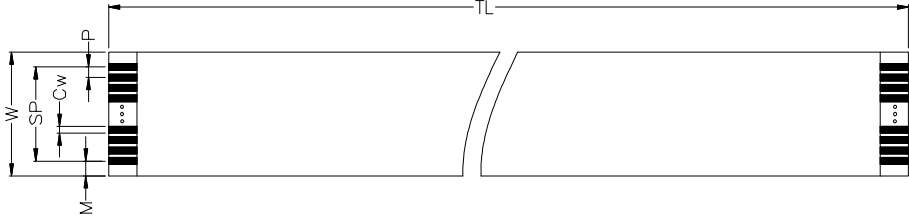


**SPECIFICATIONS**

Electrical  
 Current Rating: 1.0 A AC(rms)/DC  
 Voltage Rating: 120V AC(rms)/DC  
 Withstanding Voltage: 200V AC r.m.s  
 Temperature Range-Operating: -40°C~+85°C

Recommended storage condition  
 Temperature: 15°C~25°C  
 Humidity: 30~60%(RH)

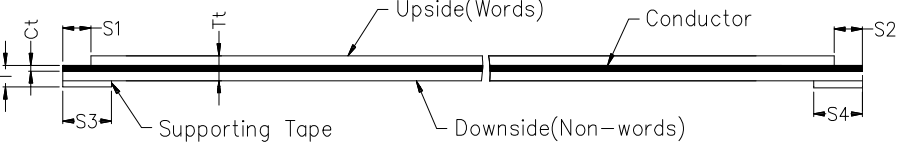

Drawing	Item	Dimension
N	Number of conductors	8
P	Pitch	1.00±0.10
SP	Total Pitch	7.0±0.15
W	Total Width	9.0±0.20
TL	Total Length	60±3
M	Margin Width	1.00±0.15
T	Terminal Thickness	0.30±0.05
Ct	Conductor Thickness	0.035
Cw	Conductor Width	0.65±0.025
S1	Strip length	4.0±0.5
S2	Strip length	4.0±0.5
S3	Supporting Tape Length	8.0±1.0
S4	Supporting Tape Length	8.0±1.0
Tt	Thickness insulation	0.12±0.05
Supporting Tape Thickness		0.225mm
PET(Insulation)		0.043mm (20624)
PET(Insulation)		0.043mm White



		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.		
DESIGN UNITS Metric		X.±0.30	X.°±5°	FRANK	31/MAY/21	FTS100008-N060A-01	FTS100022		
SCALE	SIZE	X.XX±0.20	X.XX°±2°	CHECKED BY	DATE	TITLE			
5:1	A4	X.XX±0.15	X.XX°±1°	CHERRY	31/MAY/21	FLEXINLE FLAT CABLE		REV 0	SHEET NO. 1/1
		X.XXX±0.10	X.XXX°±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				JOE	31/MAY/21				