



1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical
 Current Rating: 1.0A AC(rms)/DC
 Voltage Rating: 100V AC(rms)/DC
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range-Operating: -40°C~+80°C

Recommended storage condition
 Temperature: 15°C~25°C
 Humidity: 30~60%(RH)

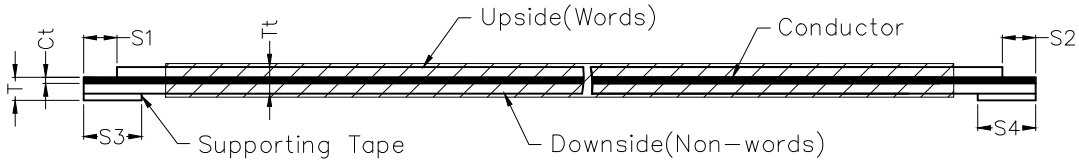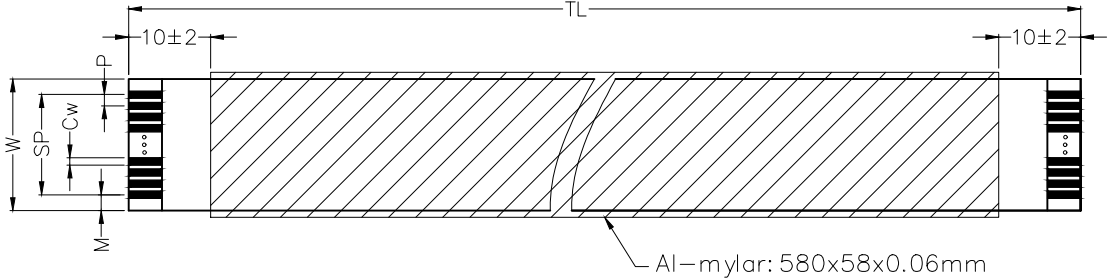

Drawing	Item	Dimension
N	Number of conductors	25
P	Pitch	1.00±0.10
SP	Total Pitch	24.0±0.15
W	Total Width	26.0±0.20
TL	Total Length	600±10
M	Margin Width	1.00±0.15
T	Terminal Thickness	0.30±0.05
Ct	Conductor Thickness	0.035
Cw	Conductor Width	0.65±0.025
S1	Strip length	4.0±1.0
S2	Strip length	4.0±1.0
S3	Supporting Tape Length	8.0±2.0
S4	Supporting Tape Length	8.0±2.0
Tt	Thickness insulation	0.12±0.05
Supporting Tape Thickness		0.225mm
PET(Insulation)		0.043mm (20624)
PET(Insulation)		0.043mm White

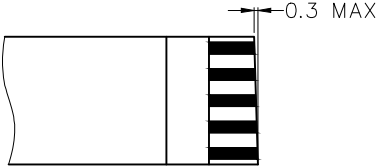

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 27/NOV/20	PART NO. FTS100025-N600A-01	ITEM NO. FTS100025	<p>Leader Of Industry</p>	
	DESIGN UNITS Metric	X. ±0.30 X.X ±0.20 X.XX ±0.15 X.XXX ±0.10	X.* ±5° X.X* ±2° X.XX* ±1° X.XXX* ±0.5°	CHECKED BY CHERRY	DATE 27/NOV/20	TITLE FLEXIBLE FLAT CABLE		
SCALE 5:1	SIZE A4	DRAWN BY KATE		DATE 27/NOV/20	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1

1 2 3 4 5 6 7 8