

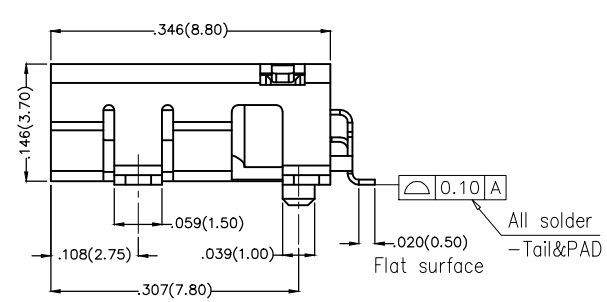
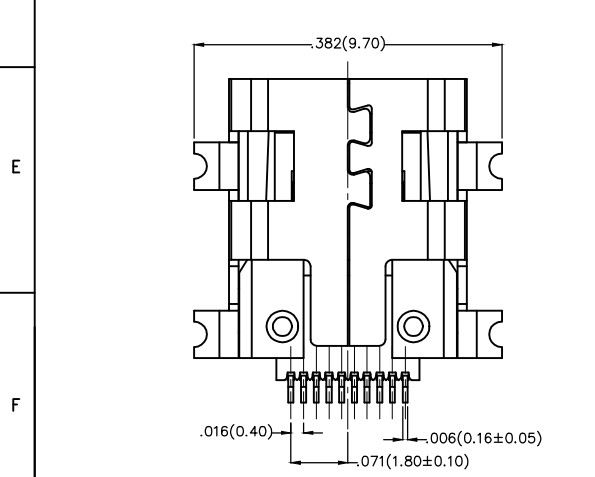
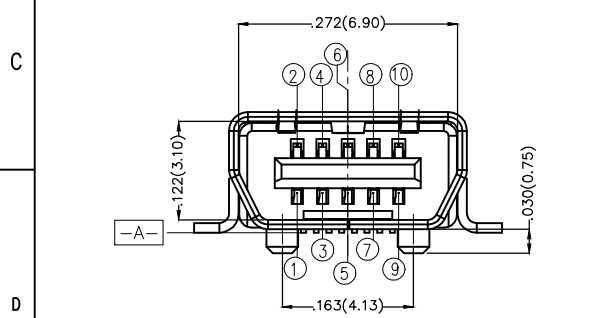


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

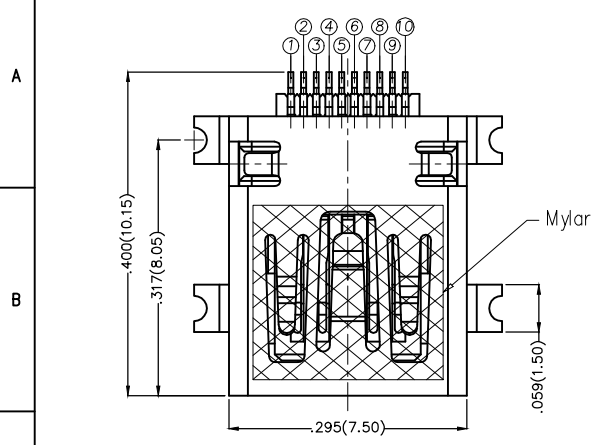

Electrical
 Current Rating: 1A AC(rms)/DC
 Voltage Rating: 100V AC(rms)/DC
 Contact Resistance: 80 mΩ Max
 Insulation Resistance: 1000 MΩ Min
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range—Operating: -55°C~+85°C

Material and Plating
 Housing: LCP (UL 94V-0) Black
 Contact: Phosphor Bronze/ Gold plated
 Shell: SPCC/ Tin plated

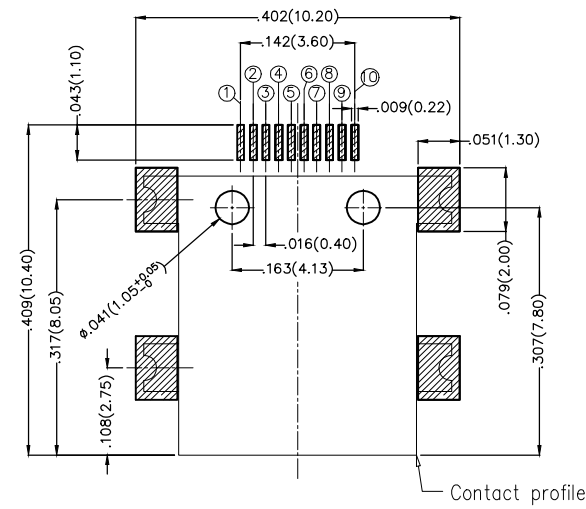

Recommended P.C.Board Layout
 Tolerances ±.002(0.05)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 15/JUL/17	PART NO. FUS129-FSBK6M	ITEM NO. FUS129	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20)	X.±5° .X'±2°	CHECKED BY CHERRY	DATE 15/JUL/17	TITLE Mini USB 10Circuits 90°Angle Female(SMT)		REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX'±1° .XXX'±0.5°	DRAWN BY JACOB	DATE 15/JUL/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		