







1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical
 Current Rating: 1A Max AC(rms)/DC
 Voltage Rating: 30V AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Withstanding Voltage: 300V AC r.m.s
 Insulation Resistance: 100 MΩ Min
 Temperature Range-Operating: -40°C~+85°C

Material And Plating
 Housing: PBT (UL94V-0), Black
 Contact: Copper alloy/ Gold in contact area, tin on tail.
 Shell: SPCC/ Nickel plated

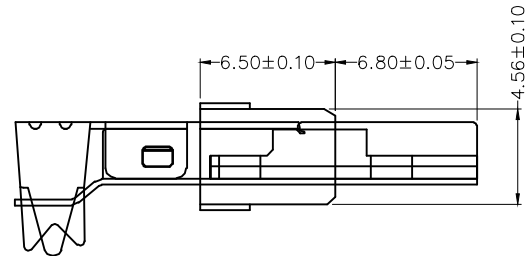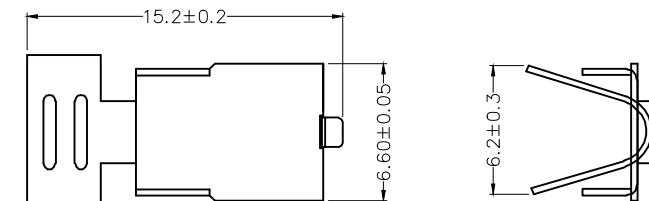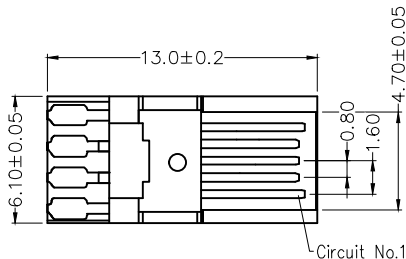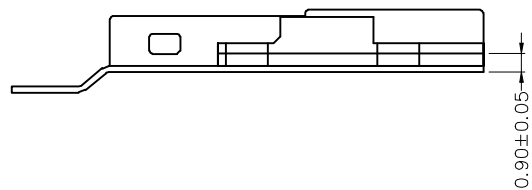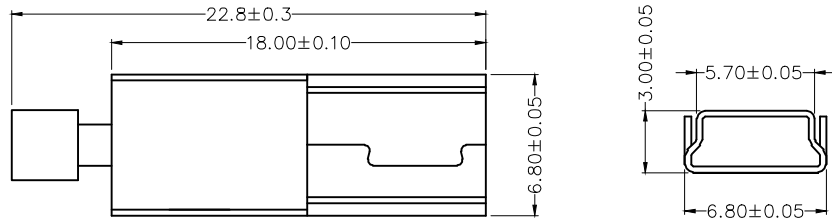

Assembly

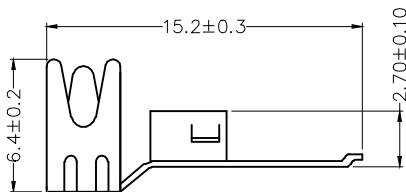

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>
	X. ±0.30	X.* ±5°	FRANK	01/APR/20	FUS132-MWSK6B	FUS132	
	X.X ±0.20	X.X* ±2°	CHECKED BY	DATE	TITLE		
	X.XX ±0.15	X.XX* ±1°	CHERRY	01/APR/20	Mini USB 5Circuits 90°Angle Male		
SCALE	SIZE	X.XXX ±0.10	X.XXX* ±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			KATE	01/APR/20	REV 0	SHEET NO. 1/1

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

B

C

D

E

F