

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Size change	27/DEC/19	KATE	CHERRY

SPECIFICATIONS

Electrical



Current Rating: 1.5A AC(rms)/DC
 Voltage Rating: 30V AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Withstanding Voltage: 500V AC r.m.s
 Insulation Resistance: 1000 MΩ Min
 Temperature Range—Operating: -25°C~+85°C

Material

Housing: Thermoplastic (UL 94V-0) , White
 Terminal: Brass
 Shell: Brass

Plating

Terminal: Gold in contact area, tin on tail
 Shell: Nickel Plated

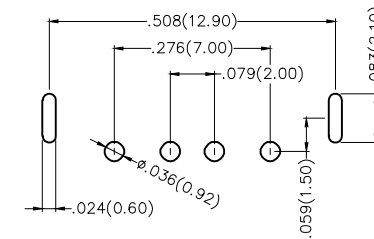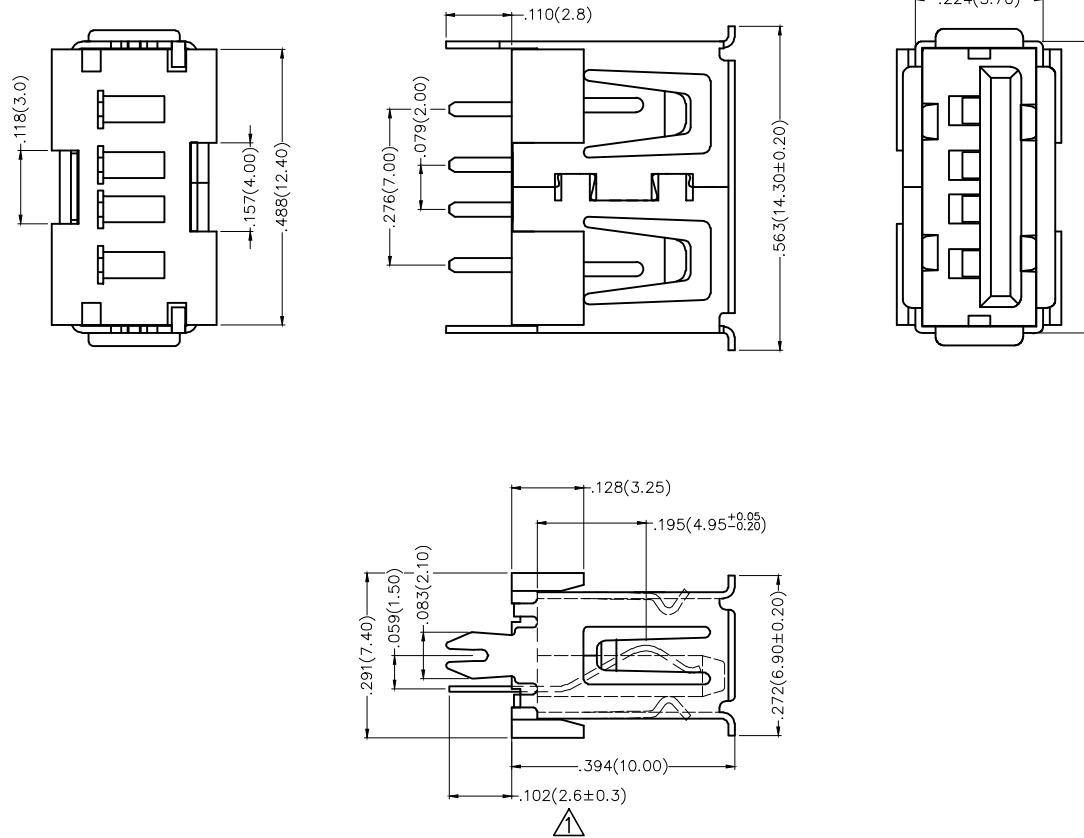

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 10/MAY/17	PART NO. FUS267-FDSW1K	ITEM NO. FUS267	 Leader Of Industry		
		X.±.012(0.30)	X.±5'	CHECKED BY	DATE	TITLE USB A-type				
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X.±2'	CHERRY	10/MAY/17	4Circuits 180°Vertical Female(DIP)			REV 1	SHEET NO. 1/1
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	XXX'±0.5'	KATE	10/MAY/17					