

| REV | LOCATIONS | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----------|-------------|------|---------|------|
| | | | | | |


SPECIFICATIONS

Electrical
 Current Rating: 1.8A AC(rms)/DC for Circuits No.1&4
 0.25A for other contacts
 Voltage Rating: 30V AC(rms)/DC
 Contact Resistance: 30mΩ Max for Circuits No.1&4
 50mΩ Max for other contacts
 Withstanding Voltage: 100V AC r.m.s
 Insulation Resistance: 100 MΩ Min
 Temperature Range—Operating: -55°C~+85°C

Mechanical
 Insertion force: 3.57kgf Max.
 Withdrawal force: 1.02kgf Min.

Material
 Housing: PBT+30%GF (UL 94V-0) Blue
 Terminal: Copper Alloy
 Shell: SPCC

Plating
 Terminal: Gold in contact area, tin on tail
 Shell: Nickel Plated

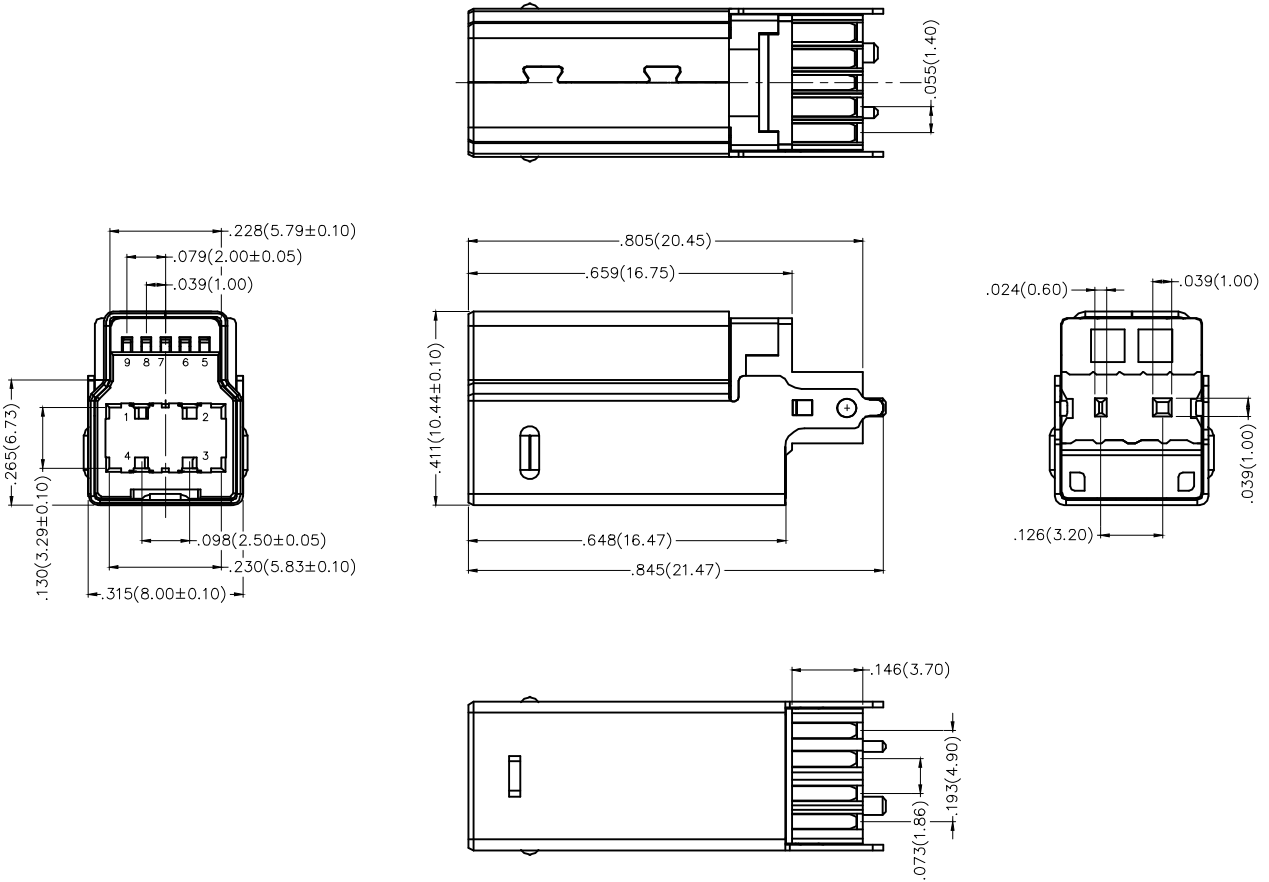

| | | | | | | | | |
|-------------------------------|--|--|--|----------------------|--|---|------------------------|---------------|
| THIRD ANGLE PROJECTION | GENERAL TOLERANCES (UNLESS SPECIFIED) | | APPROVE BY FRANK | DATE 13/MAR/18 | PART NO. FUS330-MWSU1B | ITEM NO. FUS330 | Leader Of Industry | |
| | DESIGN UNITS Inch (metric) | X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10) | X.±5° .X'±2' .XX'±1' .XXX'±0.5' | CHECKED BY CHERRY | DATE 13/MAR/18 | TITLE USB B-type 9Circuits 180°Vertical Male(3.0) | | |
| SCALE 5:1 | SIZE A4 | | DRAWN BY KATE | DATE 13/MAR/18 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | REV 0 | SHEET NO. 1/1 |