

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical
 Current Rating: 1.8A for Circuits No.1&4
 0.25A for other contacts
 Voltage Rating: 30V AC(rms)/DC
 Contact Resistance: 30mΩ Max. for Circuits No.1&4
 50mΩ Max. for other contacts
 Withstanding Voltage: 100V AC r.m.s
 Insulation Resistance: 100 MΩ Min
 Temperature Range—Operating: -55°C~+85°C

Mechanical
 Insertion force: 3.57kgf Max.
 Withdrawal force: 1.02kgf Min.

Material
 Housing: PBT+30%GF (UL 94V-0) Blue
 Terminal: Copper Alloy
 Shell: Brass

Plating
 Terminal: Gold flash on contact area, tin on tail
 Nickel plated under over all
 Shell: Nickel Plated

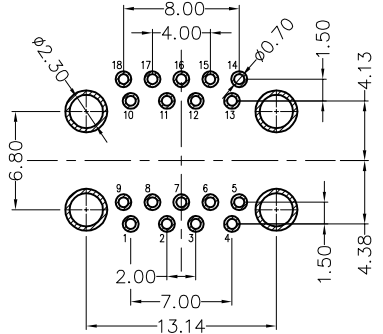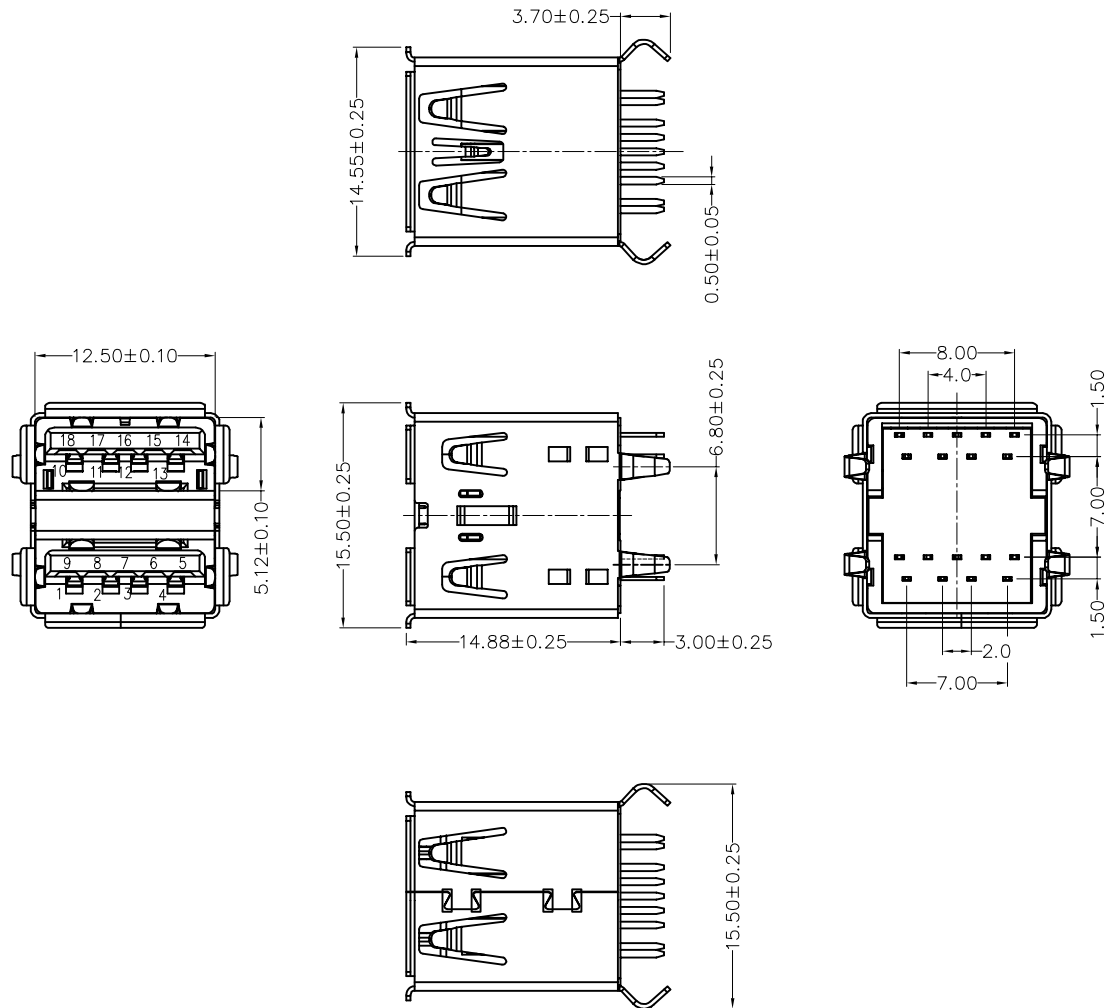

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 13/OCT/22	PART NO. FUS337-FDSBUK	ITEM NO. FUS337	 Leader Of Industry
	DESIGN UNITS Metric	X. ±0.30	X.* ±5°	CHECKED BY CHERRY	DATE 13/OCT/22	TITLE USB A-type 9+9Circuits 180°Vertical Female(DIP)(3.0)	
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°	DRAWN BY MATT	DATE 13/OCT/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX ±0.10	X.XXX' ±0.5°			REV 0	SHEET NO. 1/1