
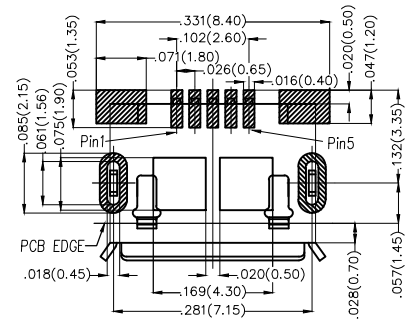


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	▲	Amend the plating of the Contact	08/MAY/25	KATE	LEO

Electrical  
 Current Rating: 1A AC(rms)/DC  
 Voltage Rating: 30V AC(rms)/DC  
 Contact Resistance: 30 mΩ Max  
 Insulation Resistance: 1000 MΩ MIN  
 Withstanding Voltage: 600V AC r.m.s  
 Temperature Range—Operating: -30°C~+85°C

Material and Plating  
 Housing: LCP( UL 94V-0)  
 Contact: Phosphor Bronze  
 Contact Plating: Gold plated ▲  
 Shell: Copper alloy/ Nickel plated

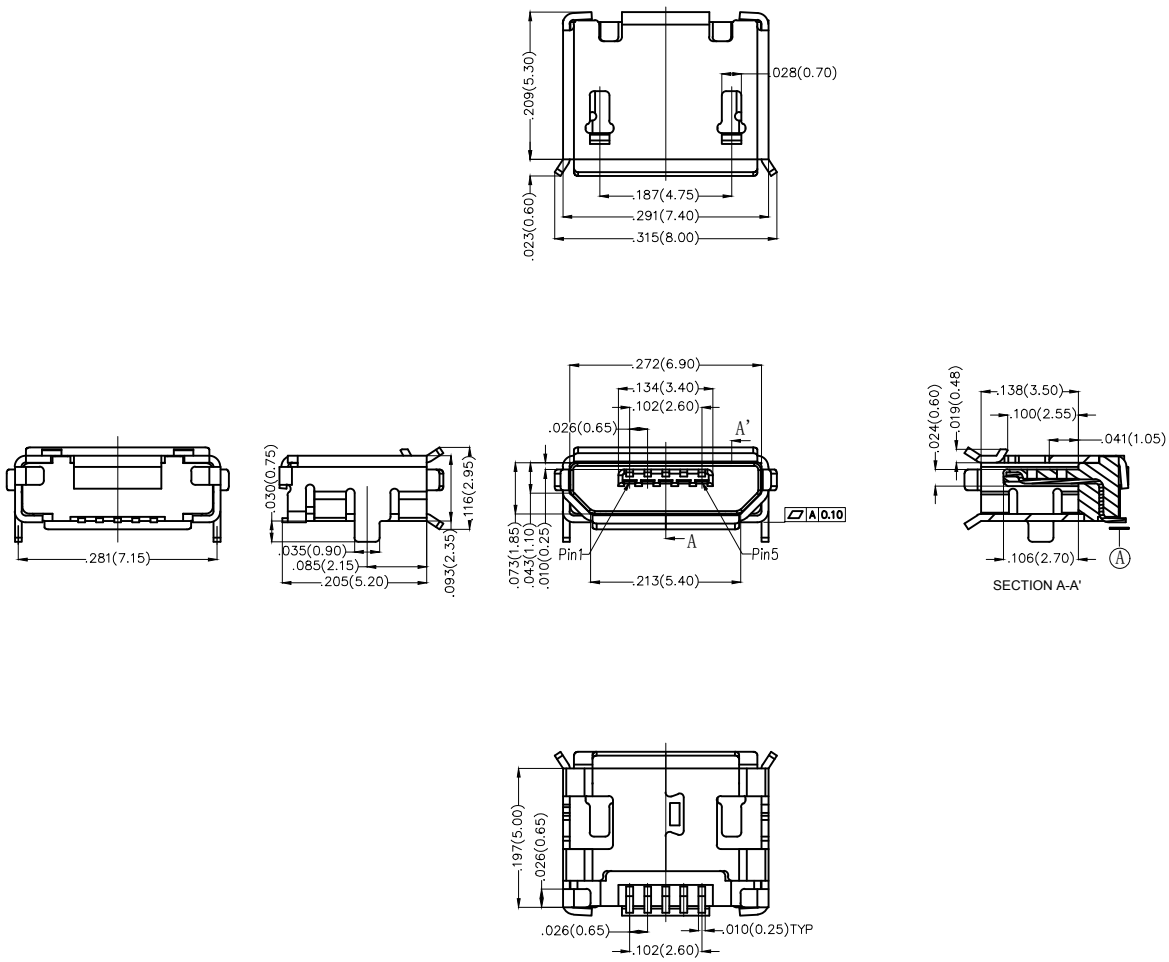

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	18/JUN/13	FUS415-FSBK6M	FUS415	
DESIGN UNITS	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 1
Inch (metric)	X.XX±.006(0.15)	.XX'±1'	CHERRY	18/JUN/13	Micro USB 5Circuits 90°Angle Female(SMT)		
SCALE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
5:1			KATE	18/JUN/13			