REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

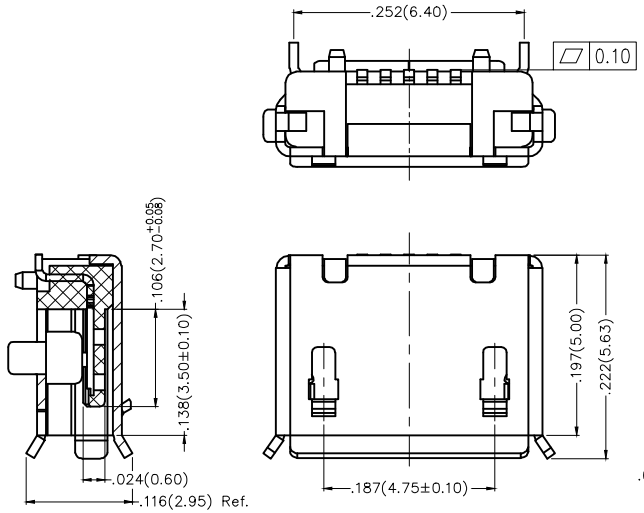



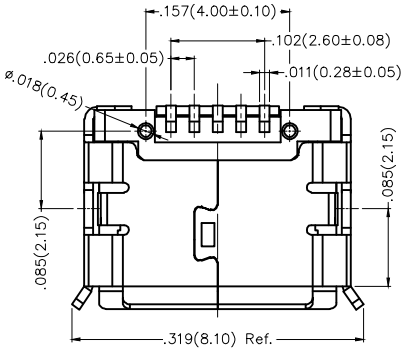

SPECIFICATIONS

Electrical
Current Rating:
1,5 PIN: 1.8A Max AC(rms)/DC
2,3,4 PIN: 1.0A Max AC(rms)/DC
Voltage Rating: 30V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Withstanding Voltage: 100V AC r.m.s
Insulation Resistance: 100 MΩ Min
Temperature Range–Operating: –30°C~+80°C

Material And Plating
Housing: Thermoplastic (UL94V–0), Black
Contact: Copper Alloy /Gold Plated
Shell: Copper Alloy /Tin Plated

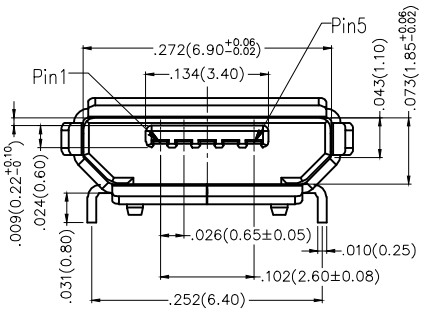

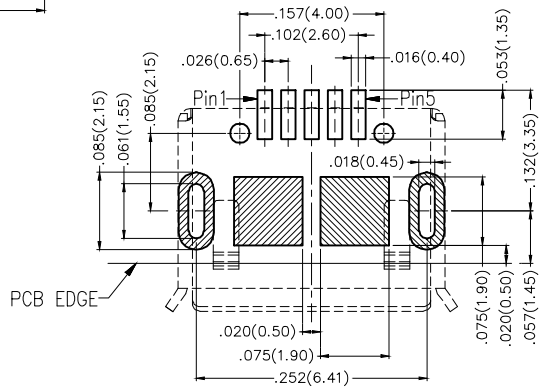

Recommended P.C.Board Layout
General Tolerances: ±0.05mm

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	TXGA Leader Of Industry
	X.±.012(0.30)	X.°±5°	FRANK	13/APR/17	FUS455-FSBK6M	FUS455	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X°±2°	CHECKED BY CHERRY	DATE 13/APR/17	TITLE Micro USB 5Circuits 90°Angle Female(SMT)		REV 0 / SHEET NO. 1/1
SCALE 5:1 / SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY KATE	DATE 13/APR/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XXX±.004(0.10)	.XXX°±0.5°					