

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical


Current Rating: 1A(2,3,4Pin)AC(rms)/DC
 1.8A(1,5Pin)AC(rms)/DC
 Voltage Rating: 30V AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 100 MΩ MIN
 Withstanding Voltage: 100V AC r.m.s
 Temperature Range-Operating: -40°C~+80°C

Material and Plating

Housing: Thermoplastic(UL94V-0) Black
 Outer Shell: Thermoplastic(UL94V-0) Black
 Inner Shell: Stainless Steel/Nickel plated
 Contact Pin: Copper Alloy/Gold plated
 Oval Ring: Rubber/White
 Ingress Protection Rating: IP67

Pinassignment:

Pins	1	2	3	4	5
Signal name	VBUS	D-	D+	ID	GND

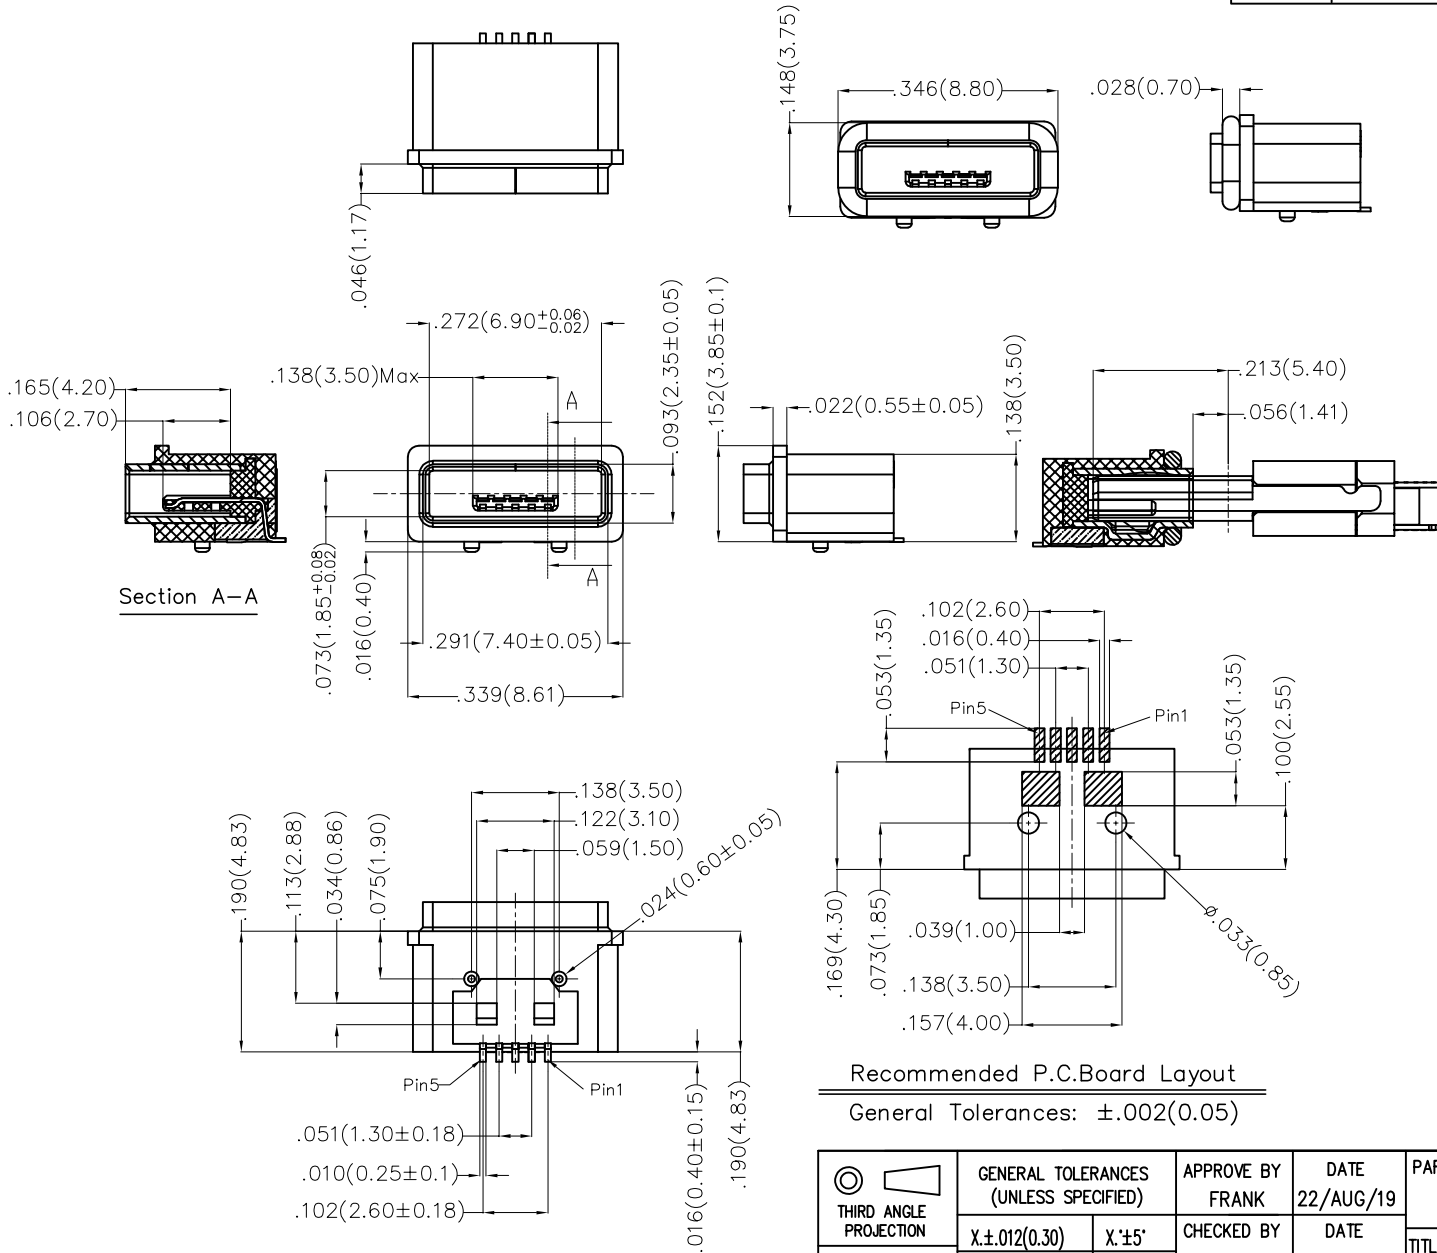

Recommended P.C.Board Layout

General Tolerances: ±.002(0.05)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/19	PART NO. FUS467-FSBK6M	ITEM NO. FUS467	 Leader Of Industry	
	X.X±.012(0.30)	X'±5'	CHECKED BY CHERRY	DATE 22/AUG/19	TITLE Micro USB 5Circuits 90°Angle Female(SMT)			REV 0
	X.XX±.008(0.20)	X'±2'		DRAWN BY ZOEY	DATE 22/AUG/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	X'X'±1'					
		X.XXX±.004(0.10)	.XXX'±0.5'					