
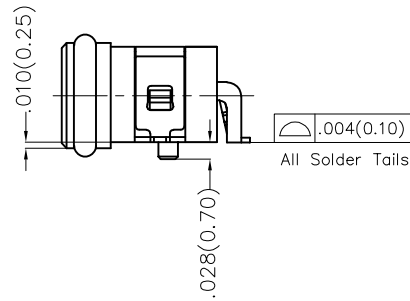
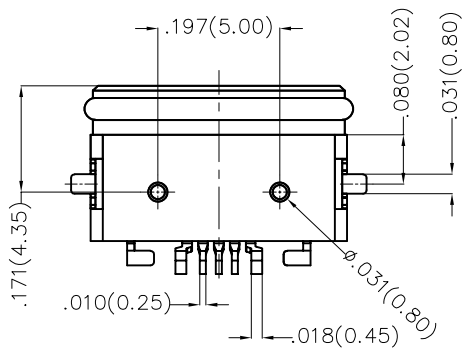
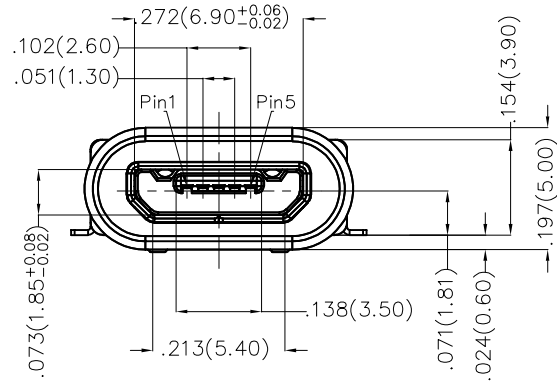


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

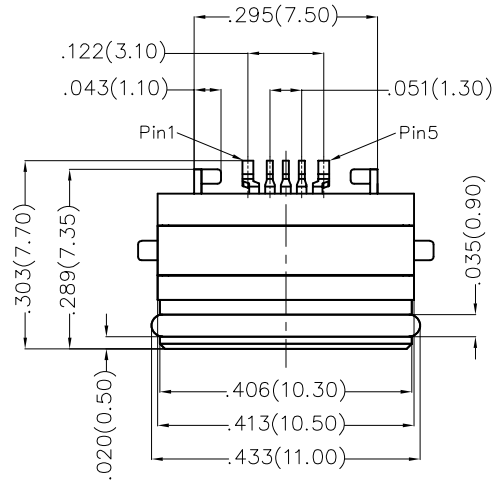

Pinassignment:

Pins	1	2	3	4	5
Signal name	VBUS	D-	D+	ID	GND

Electrical

Current Rating: 0.5A(2,3,4Pin)AC(rms)/DC
3.0A(1,5Pin)AC(rms)/DC

Voltage Rating: 30V AC(rms)/DC

Contact Resistance: 30 mΩ Max

Insulation Resistance: 1000 MΩ MIN

Withstanding Voltage: 500V AC r.m.s

Temperature Range-Operating: -40°C~+80°C

Material and Plating

Housing: Thermoplastic(UL94V-0) Black


Outer Shell: Thermoplastic(UL94V-0) Black

Inner Shell: Stainless Steel/Nickel plated

Contact Pin: Copper Alloy/Gold plated

Oval Ring: Rubber/Black

Ingress Protection Rating: IPX8

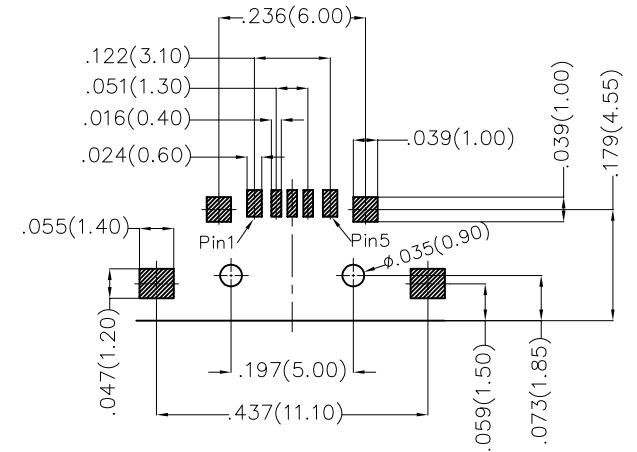

Recommended P.C.Board Layout

General Tolerances: ±.002(0.05)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 27/AUG/19	PART NO. FUS474-FSBK6M	ITEM NO. FUS474	 Leader Of Industry	
	X.±.012(0.30)	X:±5'	CHECKED BY CHERRY	DATE 27/AUG/19	TITLE Micro USB 5Circuits 90°Angle Female(SMT)			REV 0
	DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X'±2'	DRAWN BY ZOEY	DATE 27/AUG/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5'				