
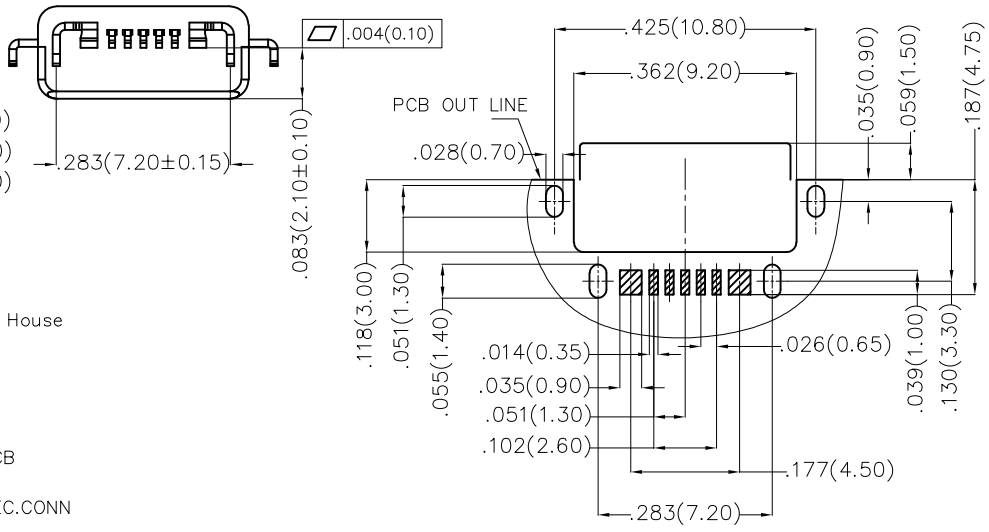
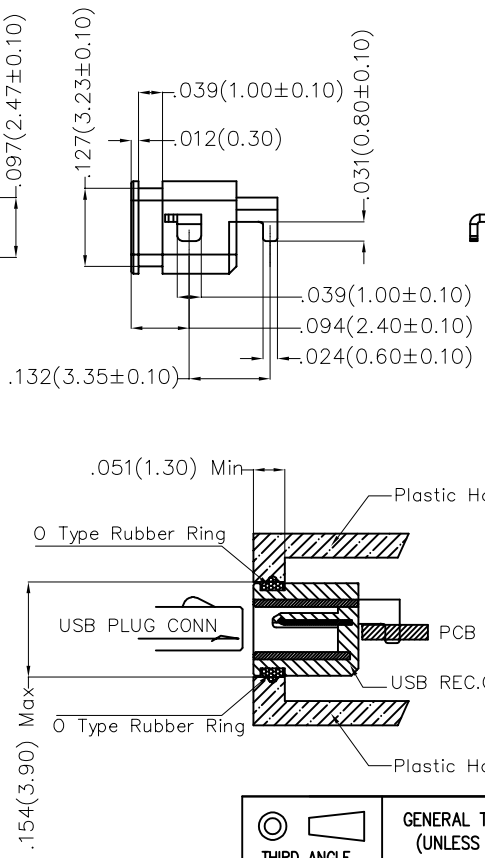


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A
B
C
D
E
F

A
B
C
D
E
F

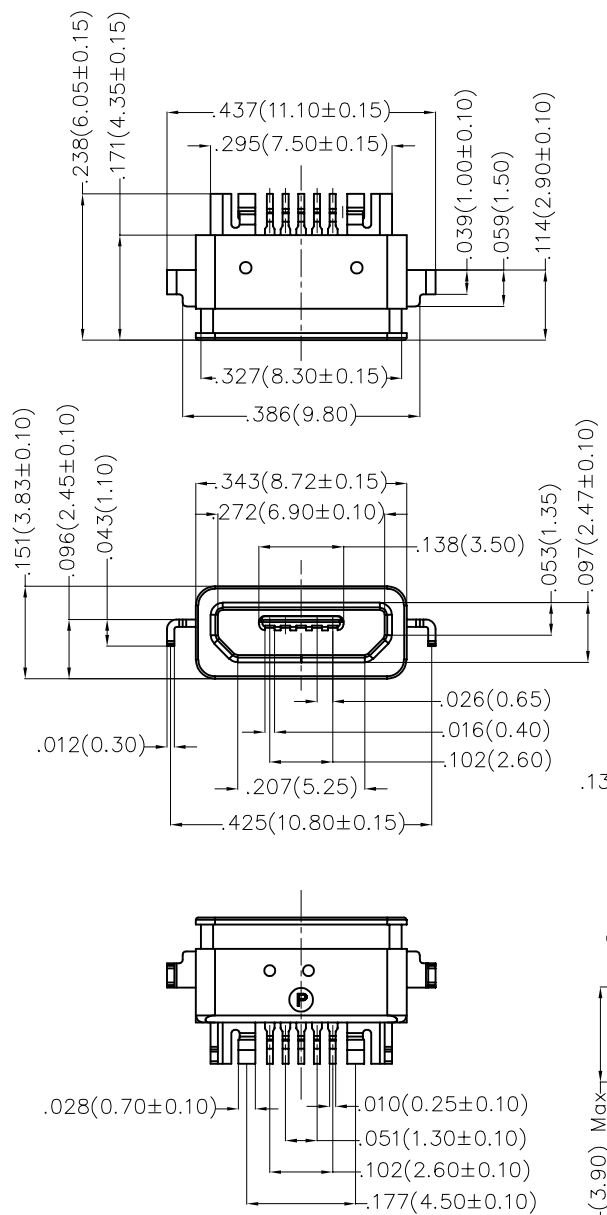

Electrical
 Current Rating: 1.8A AC(rms)/DC
 Voltage Rating: 30V AC(rms)/DC
 Contact Resistance: 30 m Ω Max
 Insulation Resistance: 500 M Ω MIN
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range-Operating: -30°C~+80°C

Material and Plating
 Housing: Thermoplastic(UL94V-0) Black
 Shell: Stainless Steel/Nickel plated
 Contact Pin: Phosphor Bronze/Gold plated
 Oval Ring: Rubber/White
 Ingress Protection Rating: IP66

Recommended P.C.Board Layout
 General Tolerances: ±.002(0.05)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X'±5'	FRANK	26/AUG/19	FUS475-FSBK6M	FUS475	
	DESIGN UNITS	X.X±.008(0.20)	X'±2'	CHECKED BY	DATE	TITLE	
	Inch (metric)	X.XX±.006(0.15)	.XX'±1'	CHERRY	26/AUG/19	Micro USB	
SCALE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	5Circuits 90°Angle Female(SMT)		REV 0
5:1			ZOEY	26/AUG/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1/1

1 2 3 4 5 6 7 8