

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Size changes	12/OCT/21	KATE	CHERRY
2		Size changes & new view	08/JUL/24	MATT	LEO



SPECIFICATIONS

Electrical

Current Rating: 1.0A AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 1000 MΩ MIN
 Withstanding Voltage: 500V AC r.m.s
 Operating Temperature: -55°C~+105°C
 Durability: 750 cycles Min.

Material

Housing: LCP (UL 94V-0) Black
 Contact: Copper alloy/ Gold flash on contact area, tin on tail
 Shell: Copper alloy/ Nickel plated
 Cover: SPCC/ Nickel plated

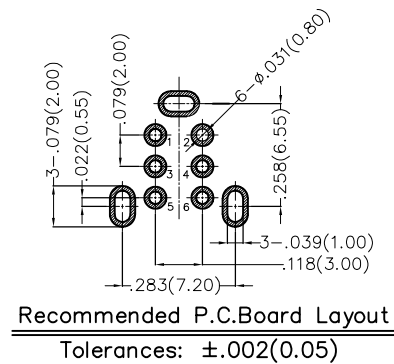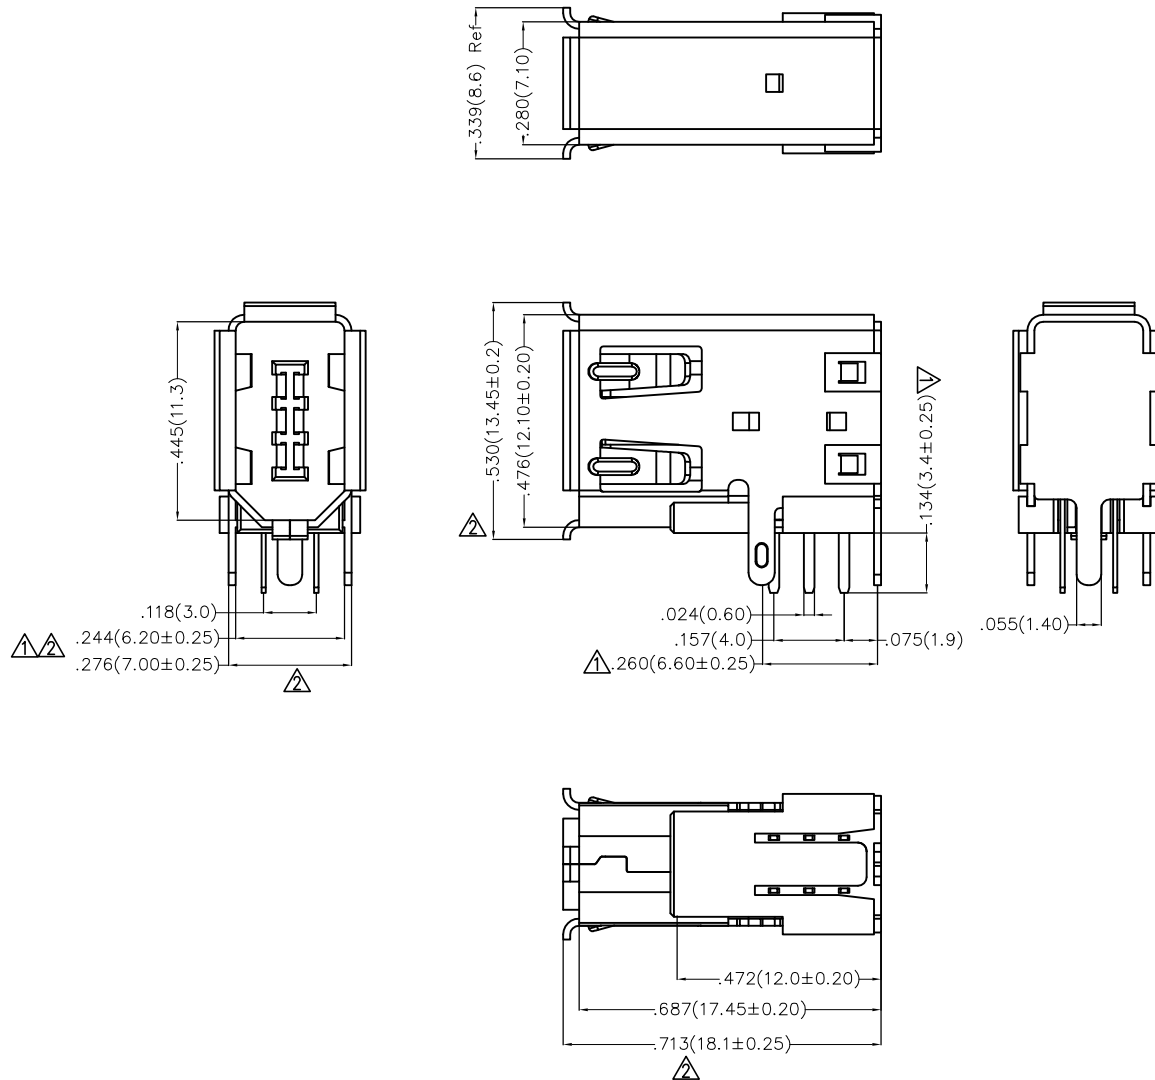

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 23/SEP/13	PART NO. FUS603-FDBK6K	ITEM NO. FUS603	 Building Technology Cornerstone	
	X.±.012(0.30)	X:±5'	CHECKED BY CHERRY	DATE 23/SEP/13	TITLE USB (IEEE 1394) 6Circuits 90° Angle Female(DIP)			REV 2 SHEET NO. 1/1
	X.XX±.006(0.15)	.XX'±1'	DRAWN BY JACOB	DATE 23/SEP/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	X.XXX±.004(0.10)	.XXX'±0.5'						

1 2 3 4 5 6 7 8