

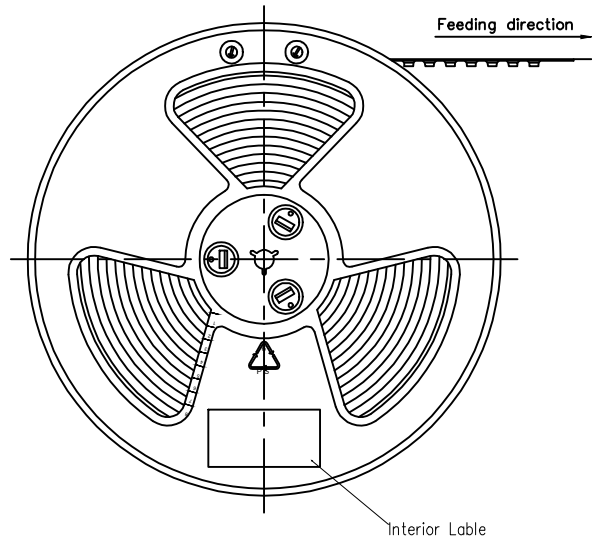



- Note:
1. 10 sprocket hole cumulative tolerance±0.2
 2. Carrier camber is within 1.0mm in 100mm
 3. Material: White Conductive polystyrene Alloy 100% recyclable
 4. All dimensions meet EIA-481-3 requirements
 5. Component load per 15" reel: 450pcs

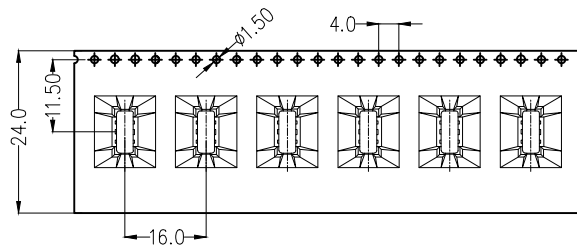


Feeding Direction

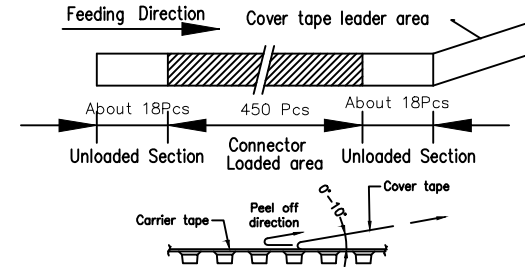

PE Bag



Drying agent/pcs

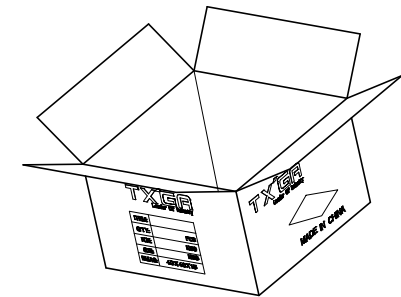

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 09/OCT/22	PART NO. FUS6227-FSSBKM	ITEM NO. FUS6227	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE			
DESIGN UNITS METRIC		X.X ±0.20	X.X* ±2°	GISELLE	09/OCT/22	USB C-type 24Circuits 180° Vertical Female(DIP)(3.1)		REV 0	SHEET NO. 2/2
		X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°	NICK	09/OCT/22				