


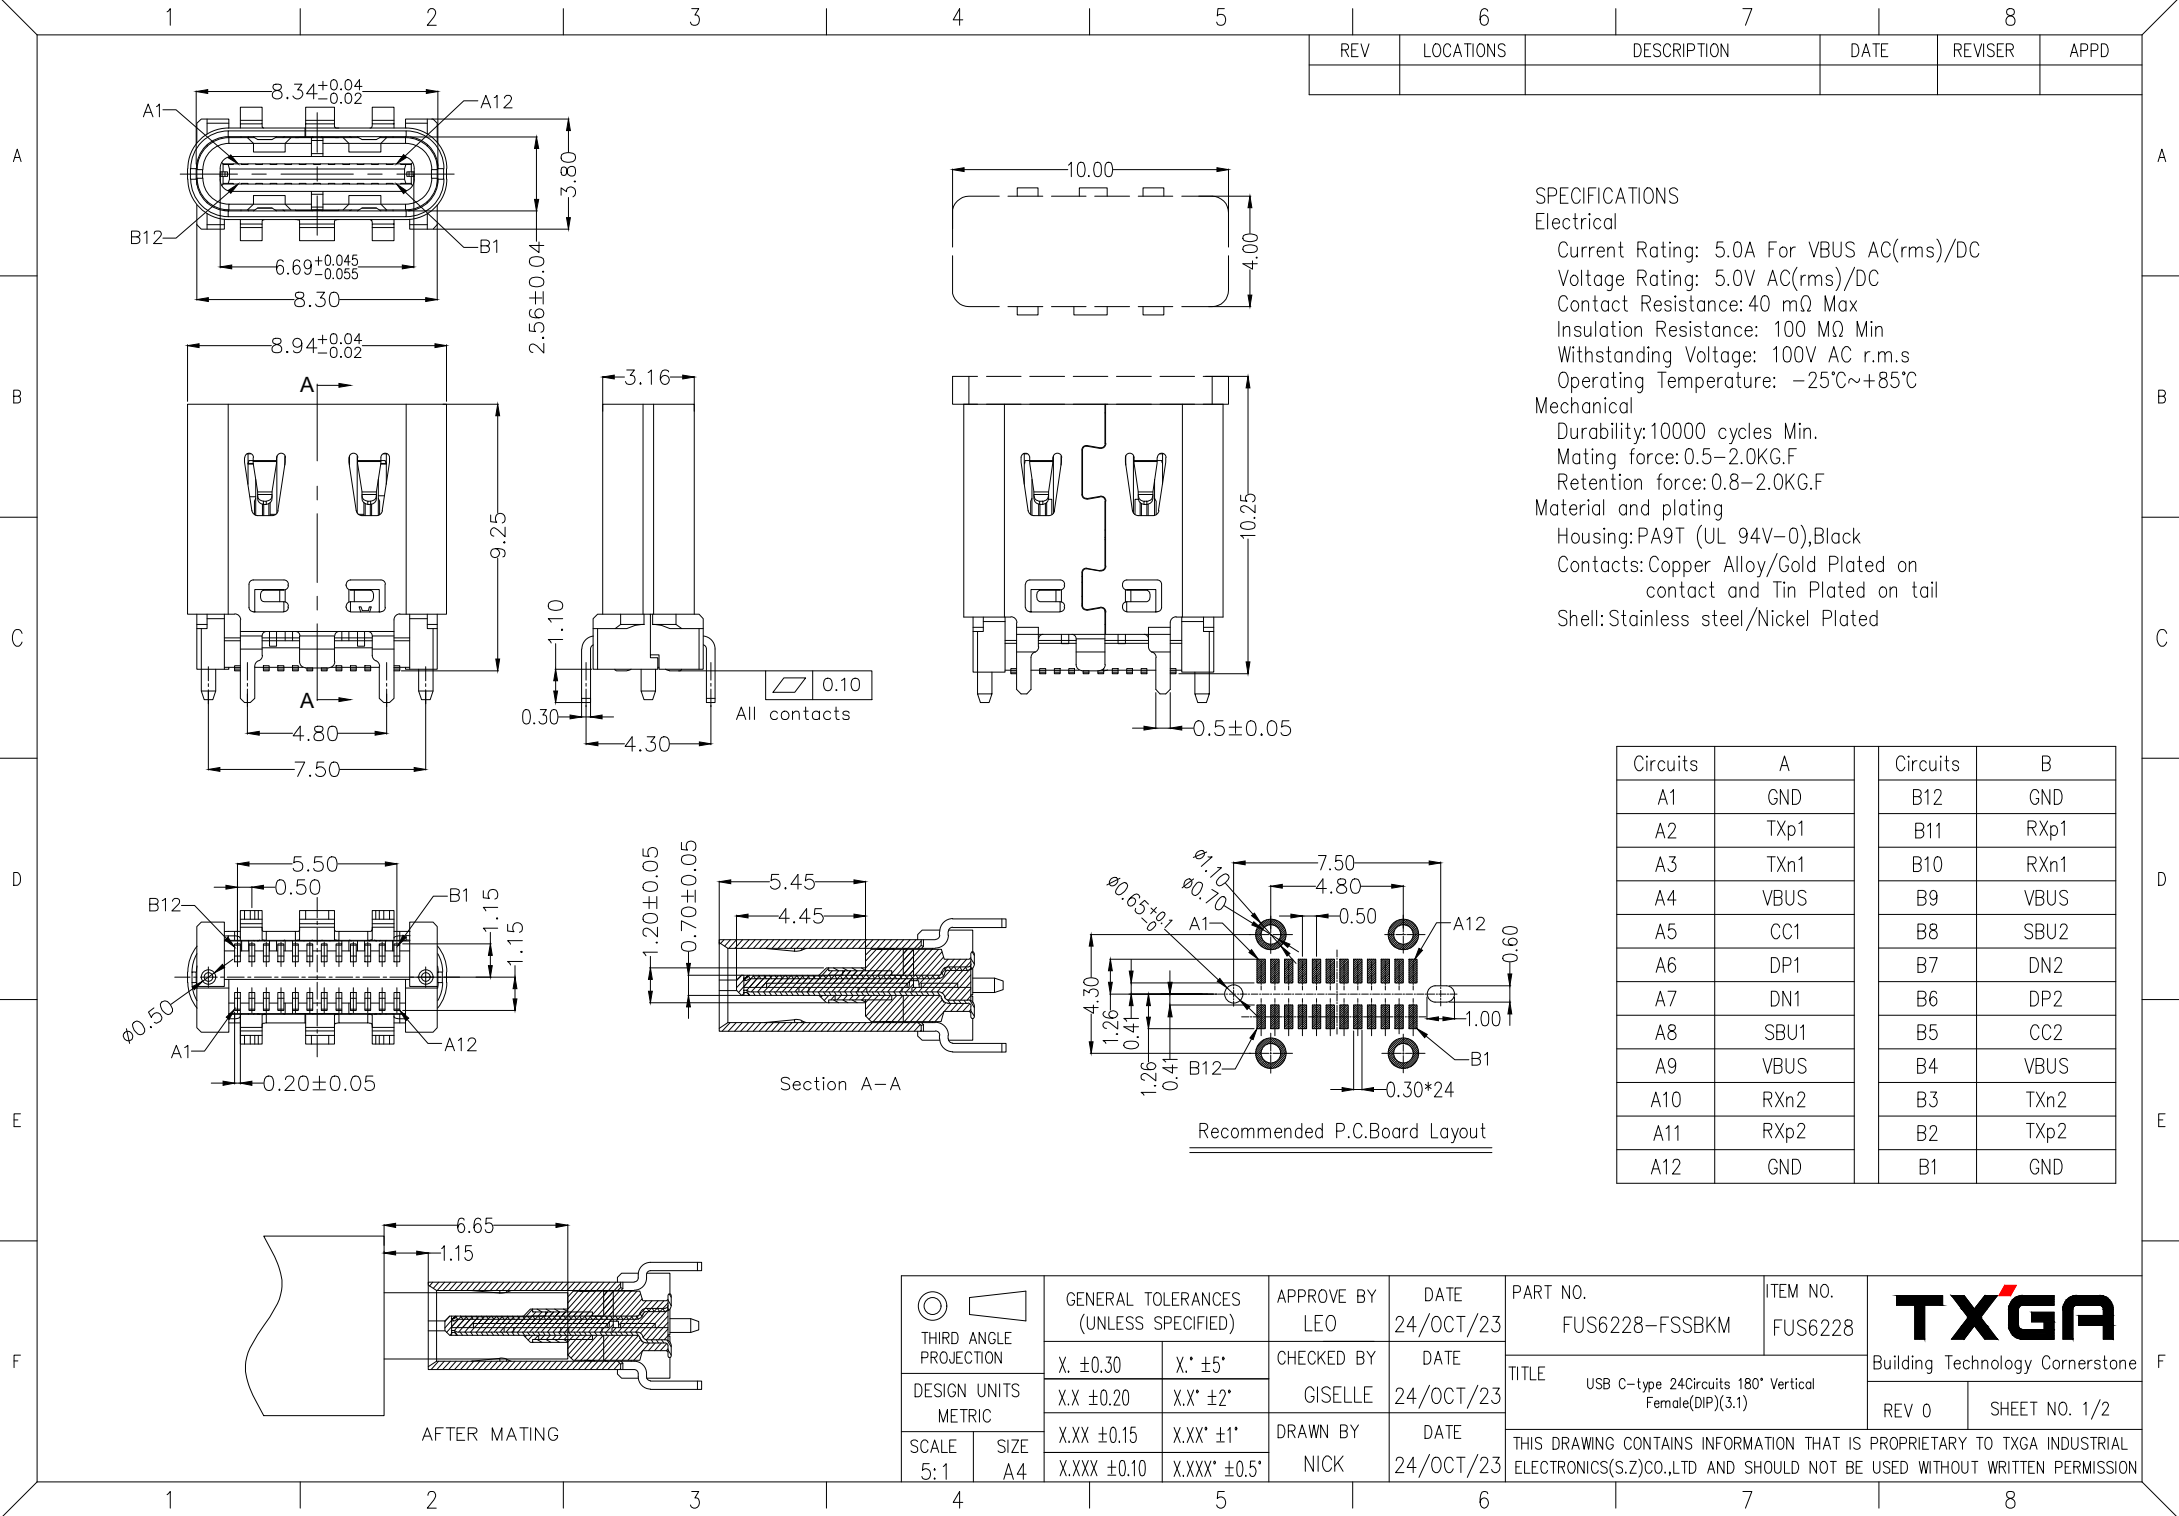
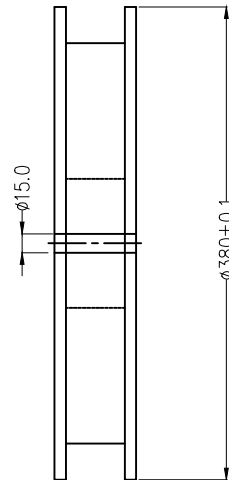



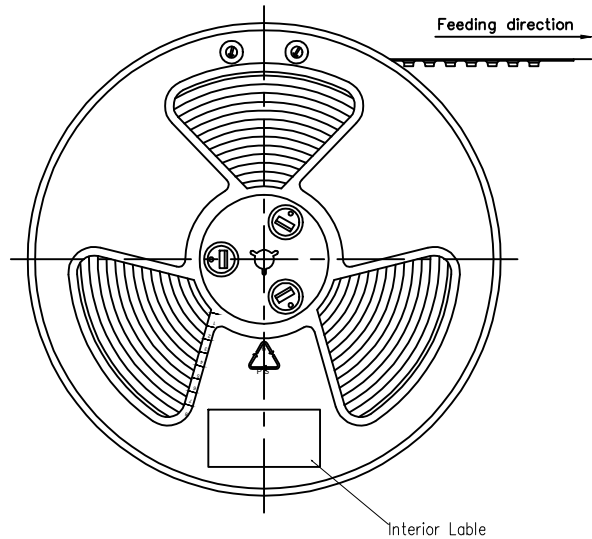


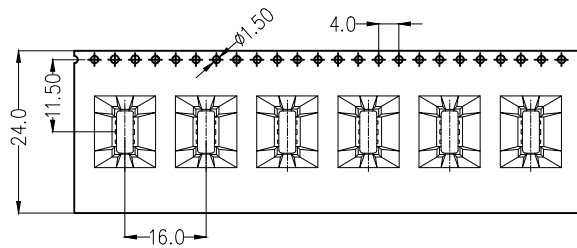

- Note:
1. 10 sprocket hole cumulative tolerance ± 0.2
 2. Carrier camber is within 1.0mm in 100mm
 3. Material: White Conductive polystyrene Alloy 100% recyclable
 4. All dimensions meet EIA-481-3 requirements
 5. Component load per 15" reel: 450pcs

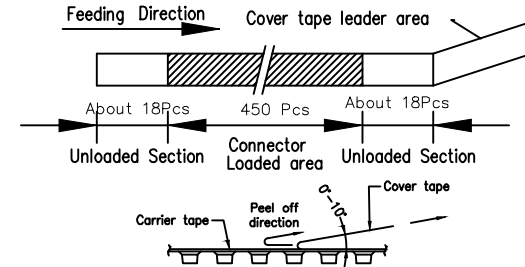

Feeding Direction

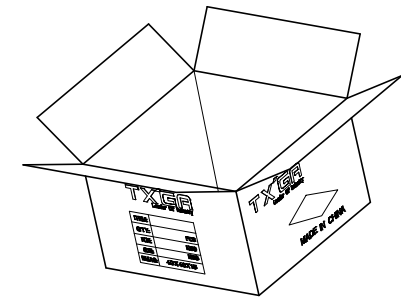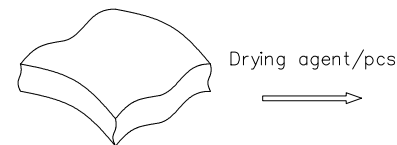

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 24/OCT/23	PART NO. FUS6228-FSSBKM	ITEM NO. FUS6228	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE USB C-type 24Circuits 180° Vertical Female(DIP)(3.1)				
DESIGN UNITS METRIC		XX ±0.20	XX.* ±2°	GISELLE	24/OCT/23			REV 0	SHEET NO. 2/2	
		XX.X ±0.15	XX.X.* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
		XX.XXX ±0.10	XX.XXX.* ±0.5°	NICK	24/OCT/23					