

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical

Current Rating: 5.0A AC(rms)/DC
Voltage Rating: 20V AC(rms)/DC
Contact Resistance: 40mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 100V AC r.m.s

Mechanical



Mating force: 0.5–2.0KG.F
Retention force: 0.8–2.0KG.F
Durability: 10000 cycles Min.

Environmental


Operating Temperature: -30°C~+80°C

Material and plating




Housing: LCP (UL 94V-0), Black
Contacts: Copper Alloy/Gold plated
Shell: Stainless steel/Nikel plated

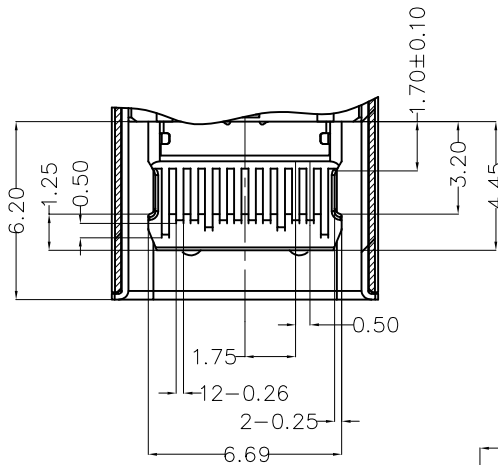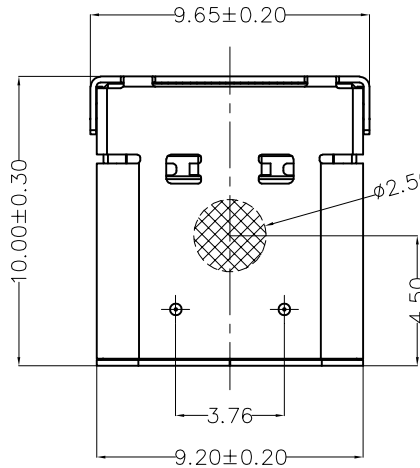


Section B-B

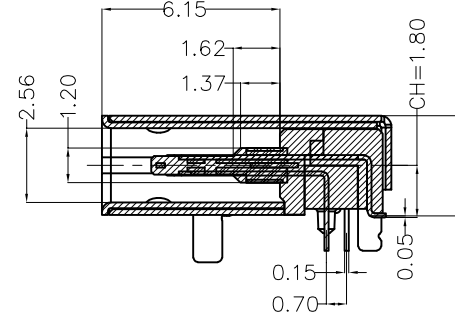


Section A-A

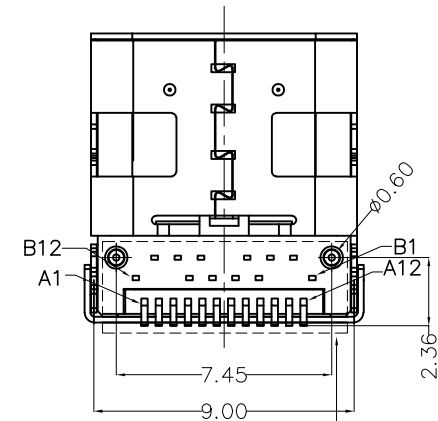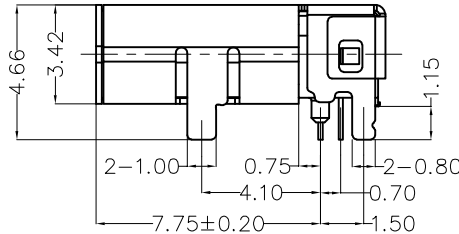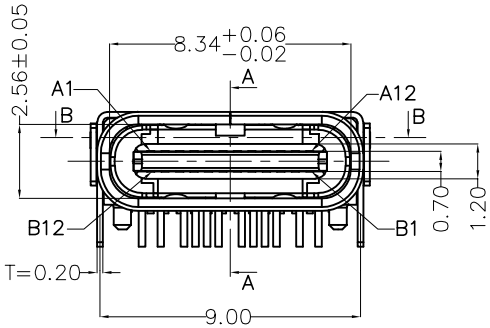

Detail A

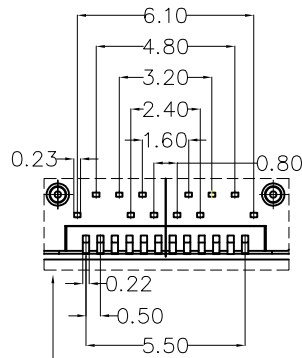

Detail A

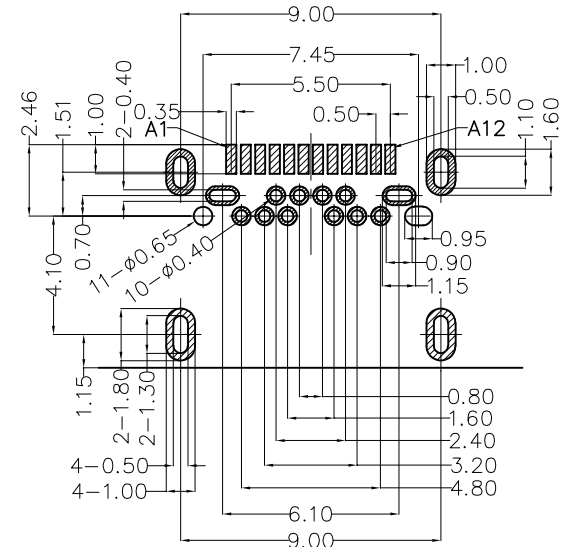

Recommended P.C.Board Layout

General tolerances ±0.05mm

Circuits	A	Circuits	B
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND





 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.
	X.±0.30	X.±5°	FRANK	13/SEP/22	FUS695-FSBBKM	FUS695
	X.X±0.20	.X±2°	CHECKED BY	DATE	TITLE	
	X.XX±0.15	.XX±1°	CHERRY	13/SEP/22	USB C-type	
SCALE	SIZE	X.XXX±0.10	.XXX±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
5:1	A4	QING			13/SEP/22	REV 0 SHEET NO. 1/2



REV 0 SHEET NO. 1/2

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.0 sprocket hole cumulative tolerance ± 0.2
 2. Carrier camber is within 1.0mm in 250mm
 3. Material: Clear conductive polystyrene Alloy 100% recyclable
 4. All dimensions meet EIA-481-3 requirements
 5. Peel off force of cover tape & carrier tape: 20g~130g (0.2N~1.3N)
 6. Component load per 13" reel: 800 pcs

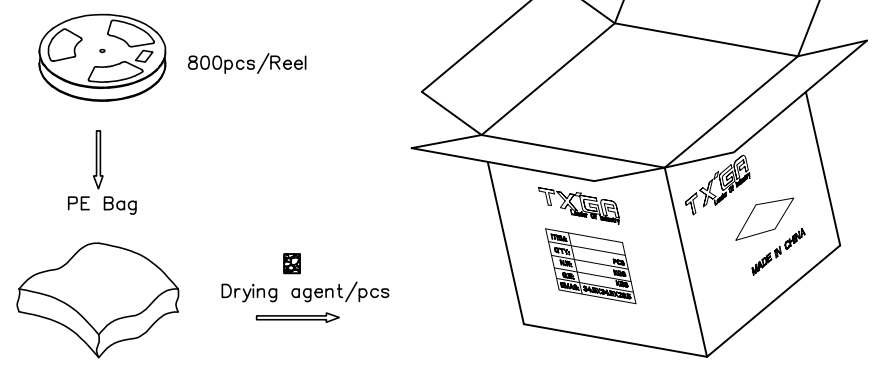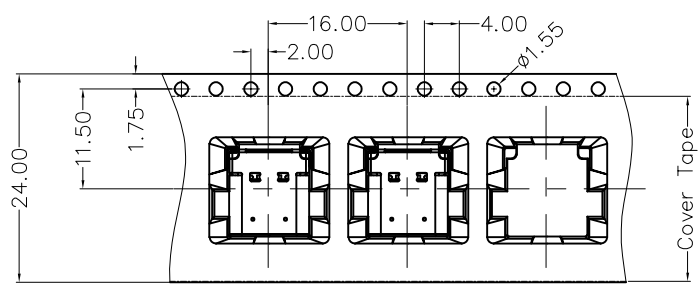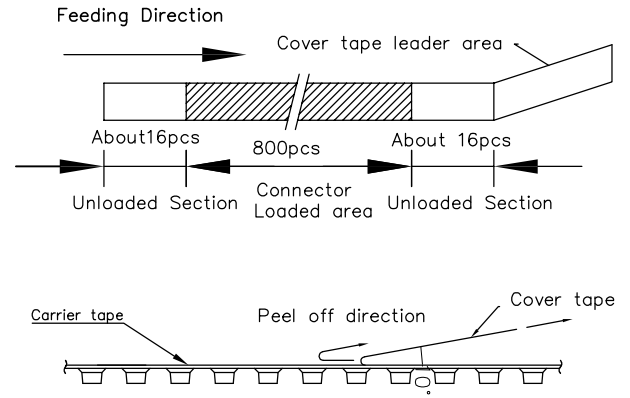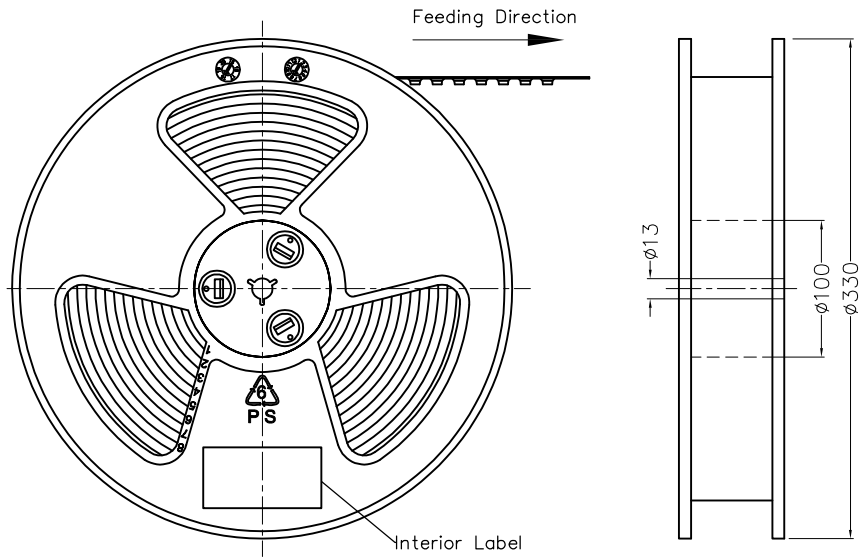

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 13/SEP/22	PART NO. FUS695-FSBBKM	ITEM NO. FUS695	 Leader Of Industry	
	X. ± 0.30	X. $\pm 5^{\circ}$	CHECKED BY CHERRY	DATE 13/SEP/22	TITLE USB C-type 90° Angle Female(Hybrid solder)			
DESIGN UNITS (metric)	X.X ± 0.20	.X $\pm 2^{\circ}$	DRAWN BY QING	DATE 13/SEP/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 2/2
SCALE 5:1	SIZE A4	X.XX ± 0.15	.XX $\pm 1^{\circ}$					
		X.XXX ± 0.10	.XXX $\pm 0.5^{\circ}$					