

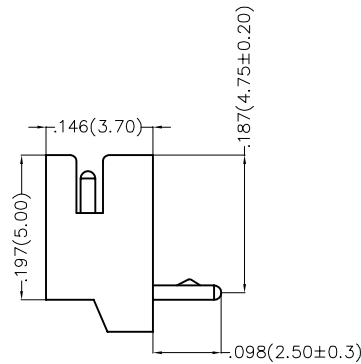



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Tolerance changes	06/MAY/22	MATT	KATE

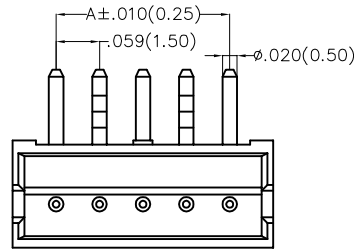

Electrical

Current Rating: 1.0A AC(rms)/DC
Voltage Rating: 50V AC(rms)/DC
Contact Resistance: 20 m Ω Max
Insulation Resistance: 500 M Ω MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -25°C ~ +85°C


Material and Plating

Housing: PA46(UL 94V-0)
Contact Pin: Brass
Plating: Tin Plated
Mates With(Housing): FHG15003 Series.

Ordering Information


FWF	150	03	—	S	XX	B	2	6	XX	B
1	2	3	4	5	6	7	8	9	10	

1	Category FWF—Wafer	2	Series Number 150—Pitch 1.5mm	3	Distinction No. 03	4	Row Option S—Single Row	5	Circuits XX	6	Entry Angle B—90° Angle
7	Plating 2—Tin Plated	8	Material—Resin 6—PA46	9	Color—Resin W5—Natural K6—Black	10	Packaging B—PE Bag				

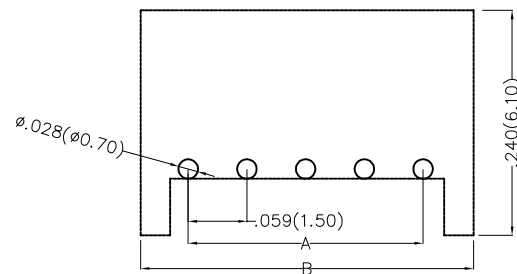

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 8/JUL/13	PART NO. FWF15003-SXXB26XXB	ITEM NO. FWF15003	 Building Technology Cornerstone	
		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE Wire to Board (Wafer) Pitch 1.5mm 90° Angle (DIP)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2°	JACOB	8/JUL/13				REV 1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX'±0.5°	CHERRY	8/JUL/13				

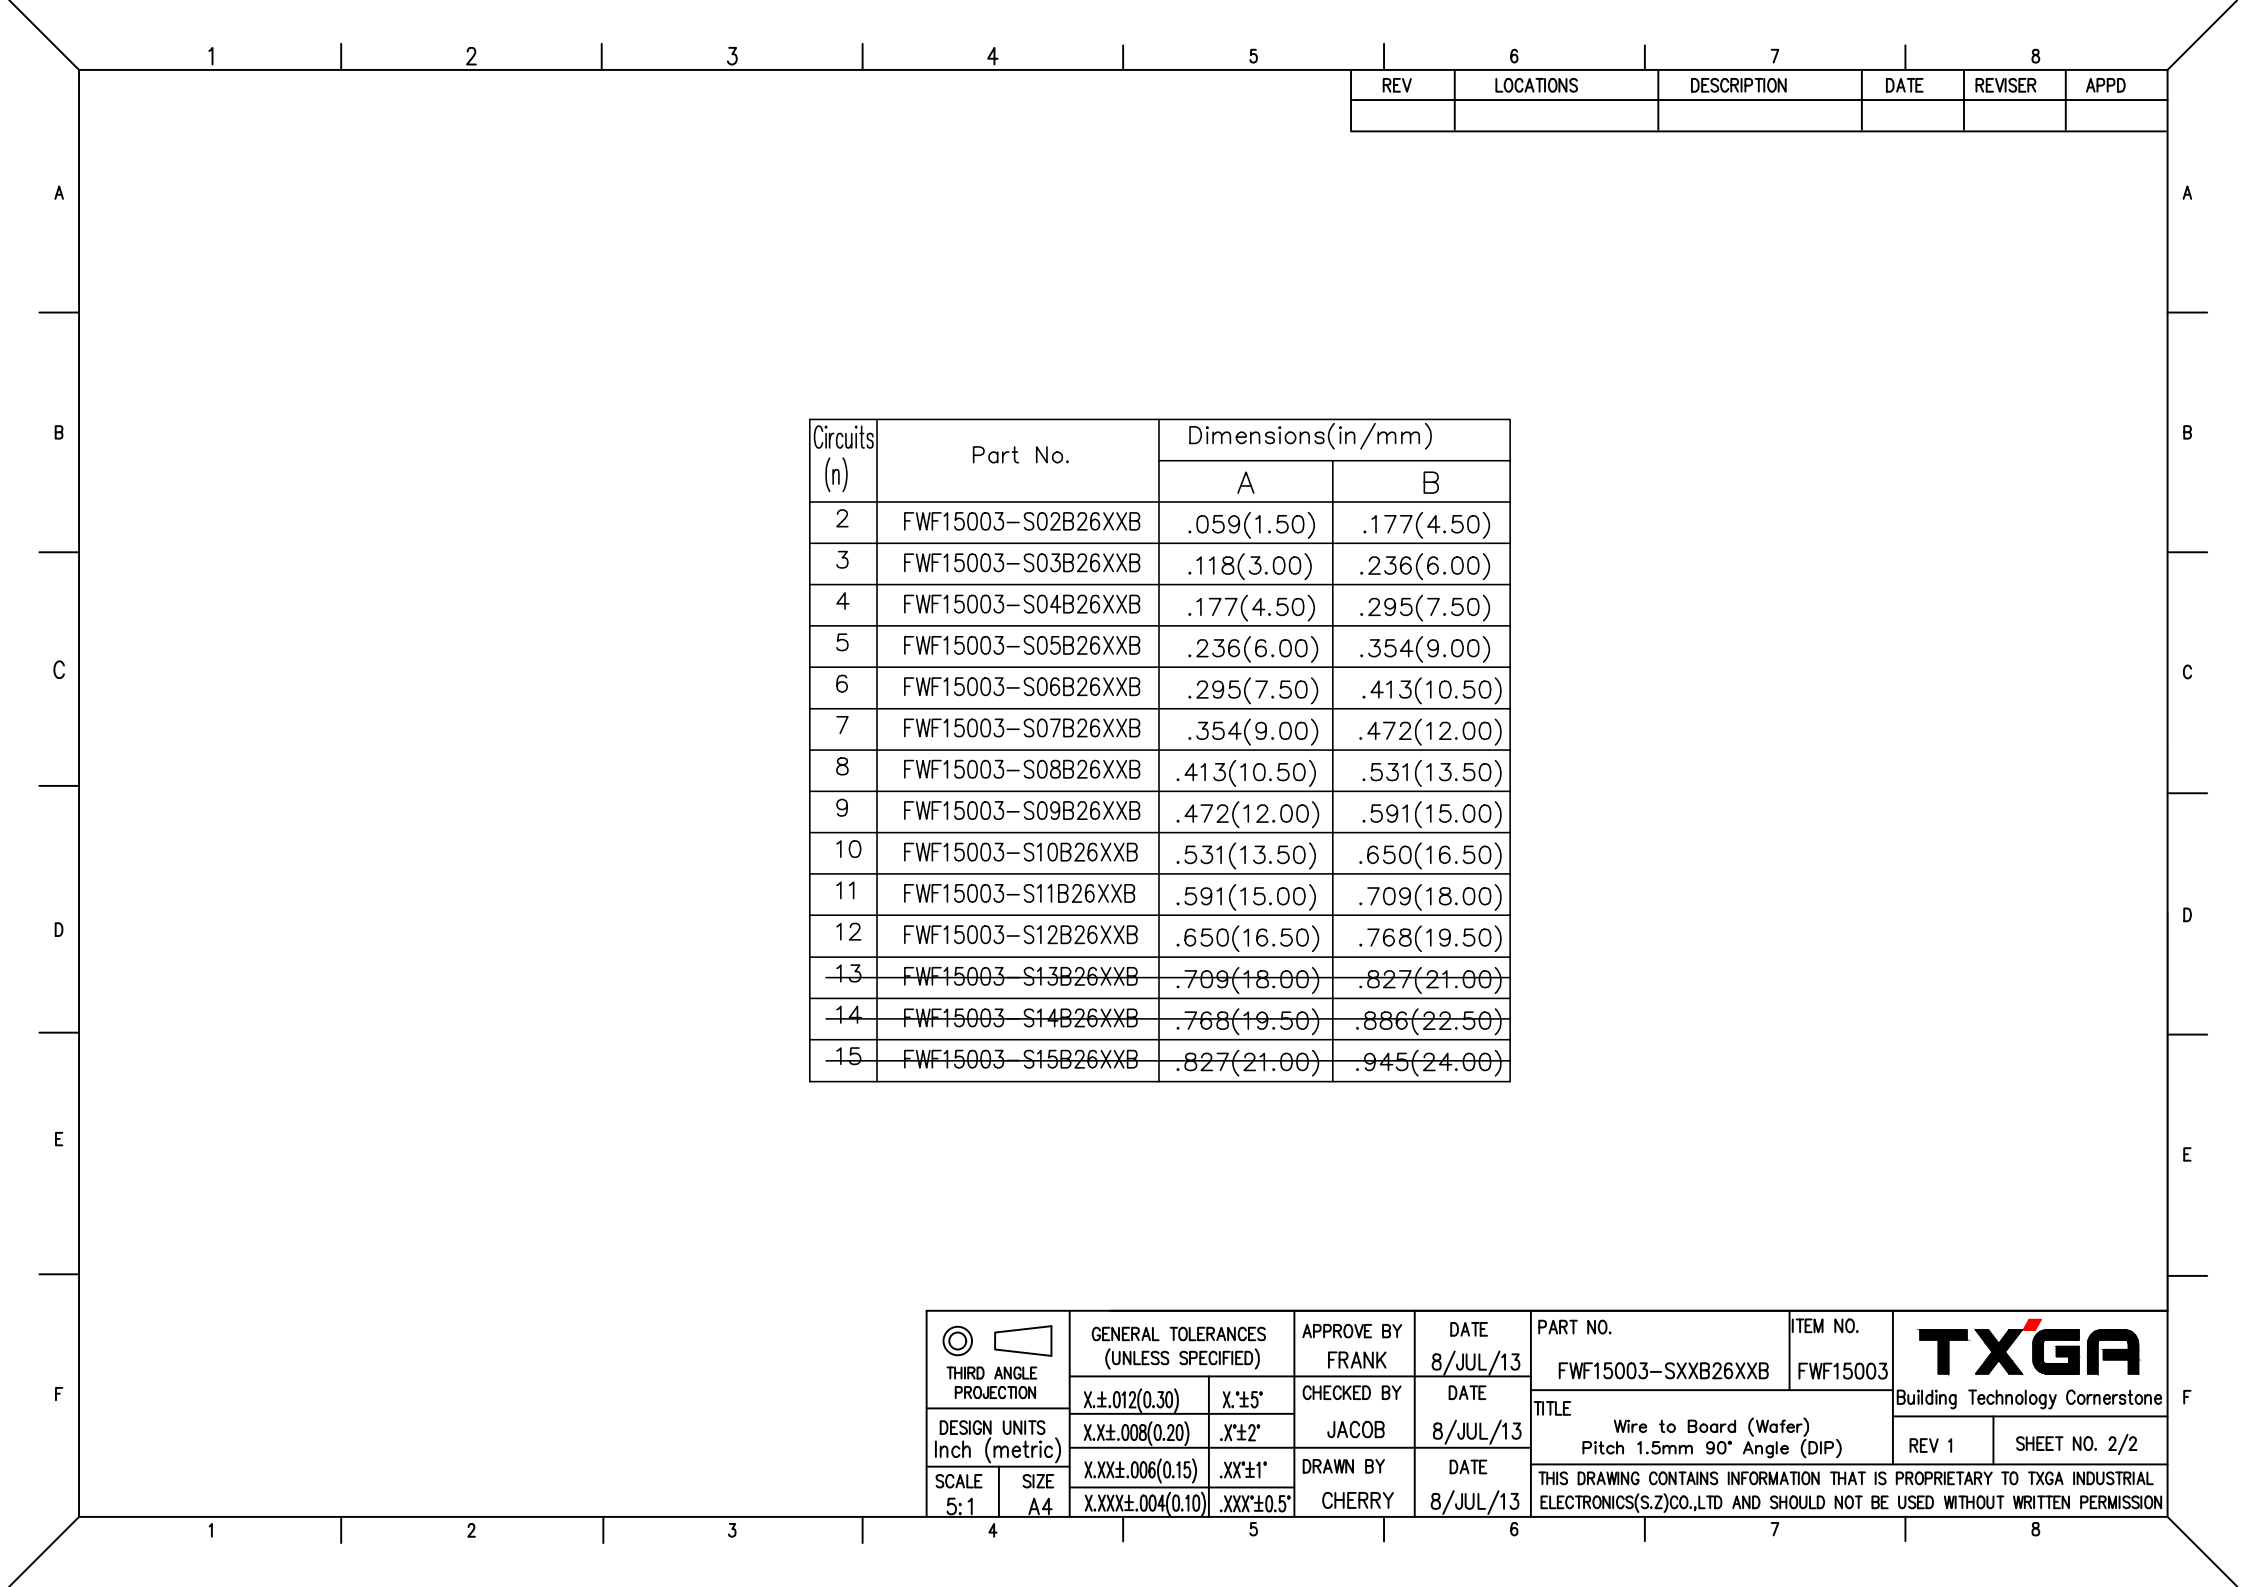

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FWF15003-S02B26XXB	.059(1.50)	.177(4.50)
3	FWF15003-S03B26XXB	.118(3.00)	.236(6.00)
4	FWF15003-S04B26XXB	.177(4.50)	.295(7.50)
5	FWF15003-S05B26XXB	.236(6.00)	.354(9.00)
6	FWF15003-S06B26XXB	.295(7.50)	.413(10.50)
7	FWF15003-S07B26XXB	.354(9.00)	.472(12.00)
8	FWF15003-S08B26XXB	.413(10.50)	.531(13.50)
9	FWF15003-S09B26XXB	.472(12.00)	.591(15.00)
10	FWF15003-S10B26XXB	.531(13.50)	.650(16.50)
11	FWF15003-S11B26XXB	.591(15.00)	.709(18.00)
12	FWF15003-S12B26XXB	.650(16.50)	.768(19.50)
13	FWF15003-S13B26XXB	.709(18.00)	.827(21.00)
14	FWF15003-S14B26XXB	.768(19.50)	.886(22.50)
15	FWF15003-S15B26XXB	.827(21.00)	.945(24.00)

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 8/JUL/13	PART NO. FWF15003-SXXB26XXB	ITEM NO. FWF15003	 Building Technology Cornerstone	
		X.±.012(0.30)	X.±5'	CHECKED BY	DATE	TITLE			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2'	JACOB	8/JUL/13	Wire to Board (Wafer) Pitch 1.5mm 90° Angle (DIP)		REV 1	SHEET NO. 2/2
		X.XX±.006(0.15)	.XX'±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5'	CHERRY	8/JUL/13				