
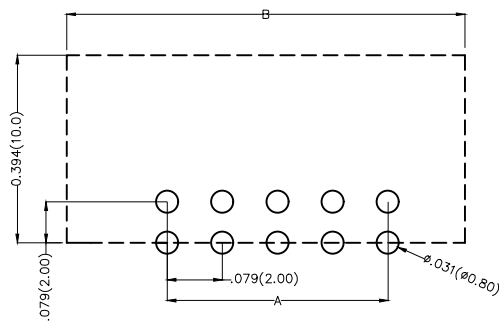

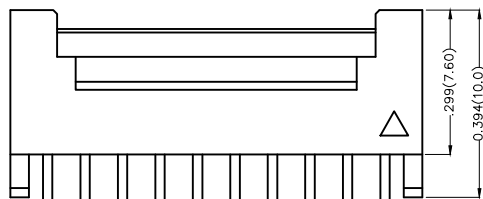


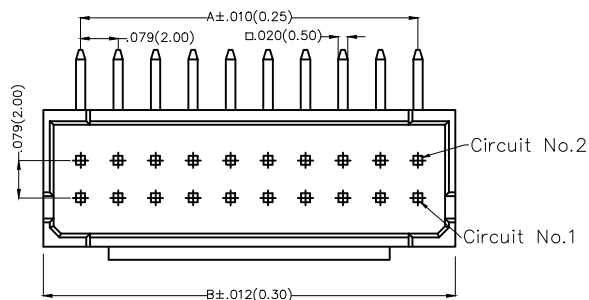

Recommended P.C.Board Layout

Electrical

Current Rating: 3.0A AC(rms)/DC

Voltage Rating: 250V AC(rms)/DC

Contact Resistance: 30 m Ω Max

Insulation Resistance: 1000 M Ω MIN

Withstanding Voltage: 1000V AC r.m.s

Temperature Range—Operating: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Material and Plating

Housing: PA46(UL 94V-0)

Contact Pin: Brass

Plating: Tin Plated

Ordering Information

FWF 200 17 — D XX B 2 2 W5 B
1 2 3 4 5 6 7 8 9 10

1	Category FWF—Wafer	2	Series Number 200—Pitch2.0mm	3	Distinction No. 17	4	Row Option Double Row	5	Circuits XX	6	Entry Angle B—90° Angle
7	Plating 2—Tin Plated	8	Material—Resin 2—PA46	9	Color—Resin W5—White	10	Packaging B—PE Bag				

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FWF20017-DXXB22W5B	ITEM NO. FWF20017	 Leader Of Industry	
		X.±.012(0.30)	X.'±5°	CHECKED BY	DATE	TITLE			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X.'±2°	JACOB	18/JUN/13	Wire to Board (Wafer) Pitch 2.0mm 90° Angled (DIP)		REV 0	SHEET NO. 1/2
		X.XX±.006(0.15)	XX.'±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	XXX.'±0.5°	CHERRY	18/JUN/13				

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
4	FWF20017-D04B22W5B	.079(2.00)	.236(6.00)
6	FWF20017-D06B22W5B	.157(4.00)	.315(8.00)
8	FWF20017-D08B22W5B	.236(6.00)	.394(10.00)
10	FWF20017-D10B22W5B	.315(8.00)	.472(12.00)
12	FWF20017-D12B22W5B	.394(10.00)	.551(14.00)
14	FWF20017-D14B22W5B	.472(12.00)	.630(16.00)
16	FWF20017-D16B22W5B	.551(14.00)	.709(18.00)
18	FWF20017-D18B22W5B	.630(16.00)	.787(20.00)
20	FWF20017-D20B22W5B	.709(18.00)	.866(22.00)
22	FWF20017-D22B22W5B	.787(20.00)	.945(24.00)
24	FWF20017-D24B22W5B	.866(22.00)	1.024(26.00)
26	FWF20017-D26B22W5B	.945(24.00)	1.102(28.00)
28	FWF20017-D28B22W5B	1.024(26.00)	1.181(30.00)
30	FWF20017-D30B22W5B	1.102(28.00)	1.260(32.00)
32	FWF20017-D32B22W5B	1.181(30.00)	1.339(34.00)
34	FWF20017-D34B22W5B	1.260(32.00)	1.417(36.00)
36	FWF20017-D36B22W5B	1.339(34.00)	1.496(38.00)
38	FWF20017-D38B22W5B	1.417(36.00)	1.575(40.00)
40	FWF20017-D40B22W5B	1.496(38.00)	1.654(42.00)

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FWF20017-DXXB22W5B	ITEM NO. FWF20017	 Leader Of Industry	
		X±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X±2°	JACOB	18/JUN/13	Wire to Board (Wafer) Pitch 2.0mm 90° Angled (DIP)		REV 0	SHEET NO. 2/2
		X.XX±.006(0.15)	.XX±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5°	CHERRY	18/JUN/13				