


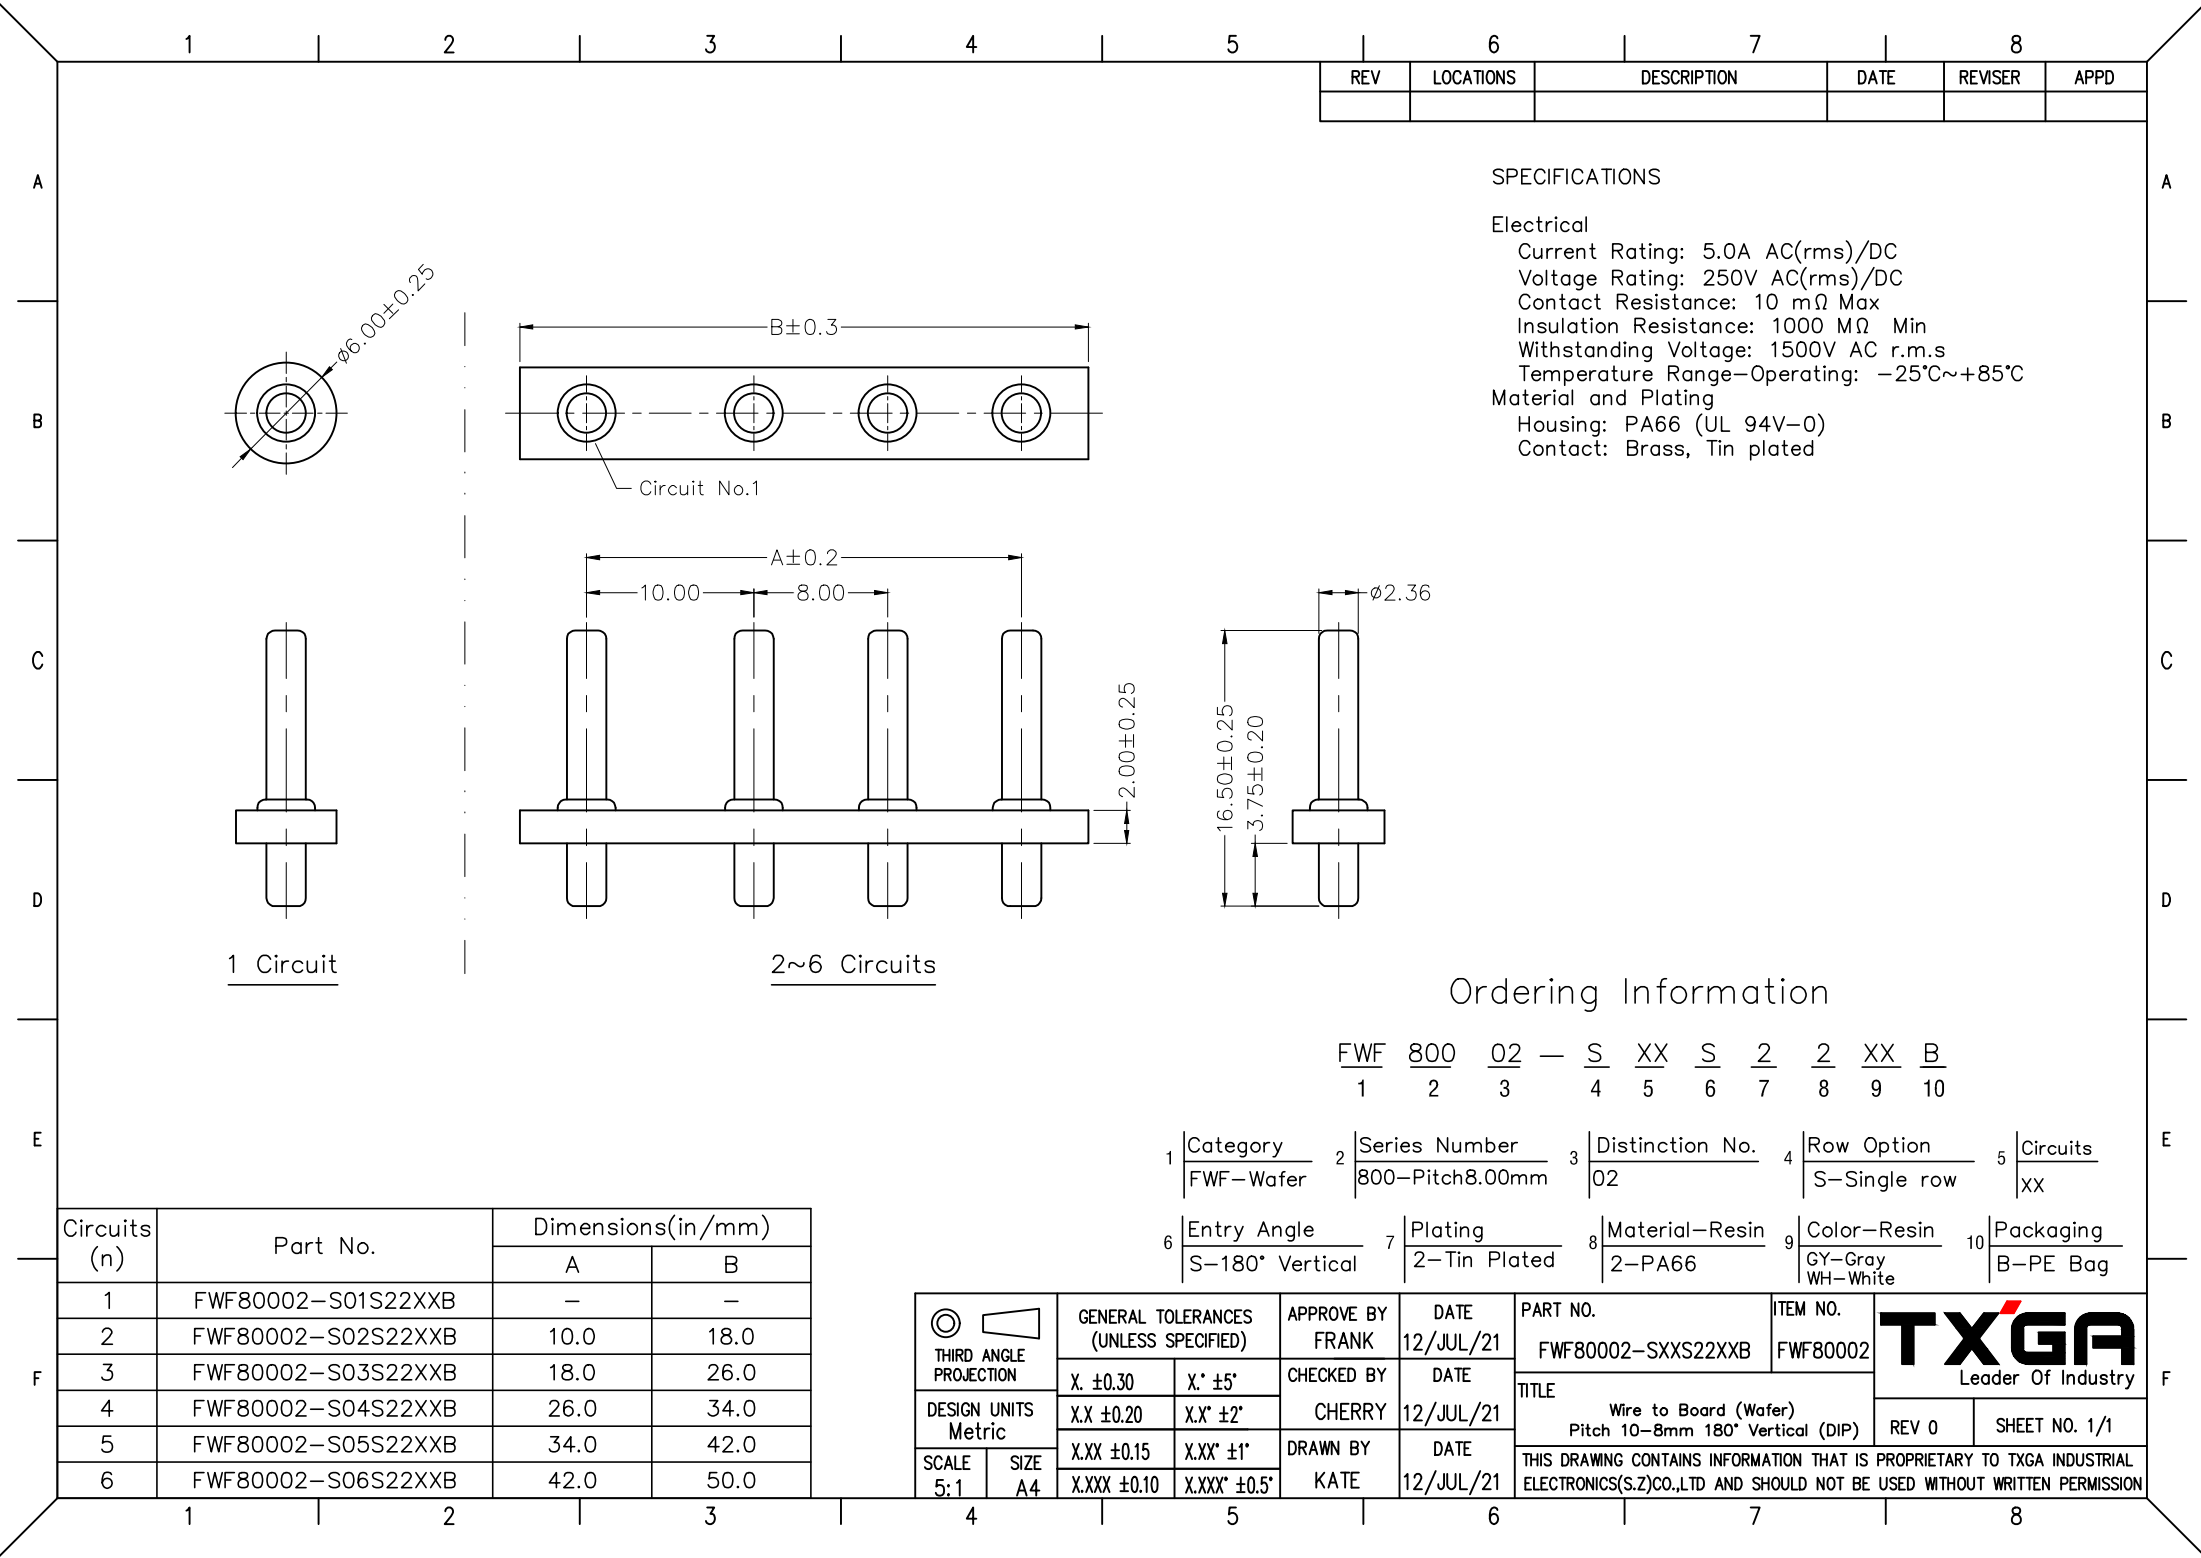

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 5.0A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 10 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 1500V AC r.m.s
Temperature Range—Operating: -25°C~+85°C
Material and Plating
Housing: PA66 (UL 94V-0)
Contact: Brass, Tin plated

Ordering Information

FWF 800 02 — S XX S 2 2 XX B
1 2 3 4 5 6 7 8 9 10

1	Category FWF—Wafer	2	Series Number 800—Pitch8.00mm	3	Distinction No. 02	4	Row Option S—Single row	5	Circuits XX
6	Entry Angle S—180° Vertical	7	Plating 2—Tin Plated	8	Material—Resin 2—PA66	9	Color—Resin GY—Gray WH—White	10	Packaging B—PE Bag

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
1	FWF80002—S01S22XXB	—	—
2	FWF80002—S02S22XXB	10.0	18.0
3	FWF80002—S03S22XXB	18.0	26.0
4	FWF80002—S04S22XXB	26.0	34.0
5	FWF80002—S05S22XXB	34.0	42.0
6	FWF80002—S06S22XXB	42.0	50.0

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/JUL/21	PART NO. FWF80002—SXXS22XXB	ITEM NO. FWF80002	 Leader Of Industry		
	X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE				
	DESIGN UNITS Metric	X.X ±0.20	X.X* ±2°	CHERRY	12/JUL/21	Wire to Board (Wafer) Pitch 10—8mm 180° Vertical (DIP)			REV 0
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°	KATE	12/JUL/21				