


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

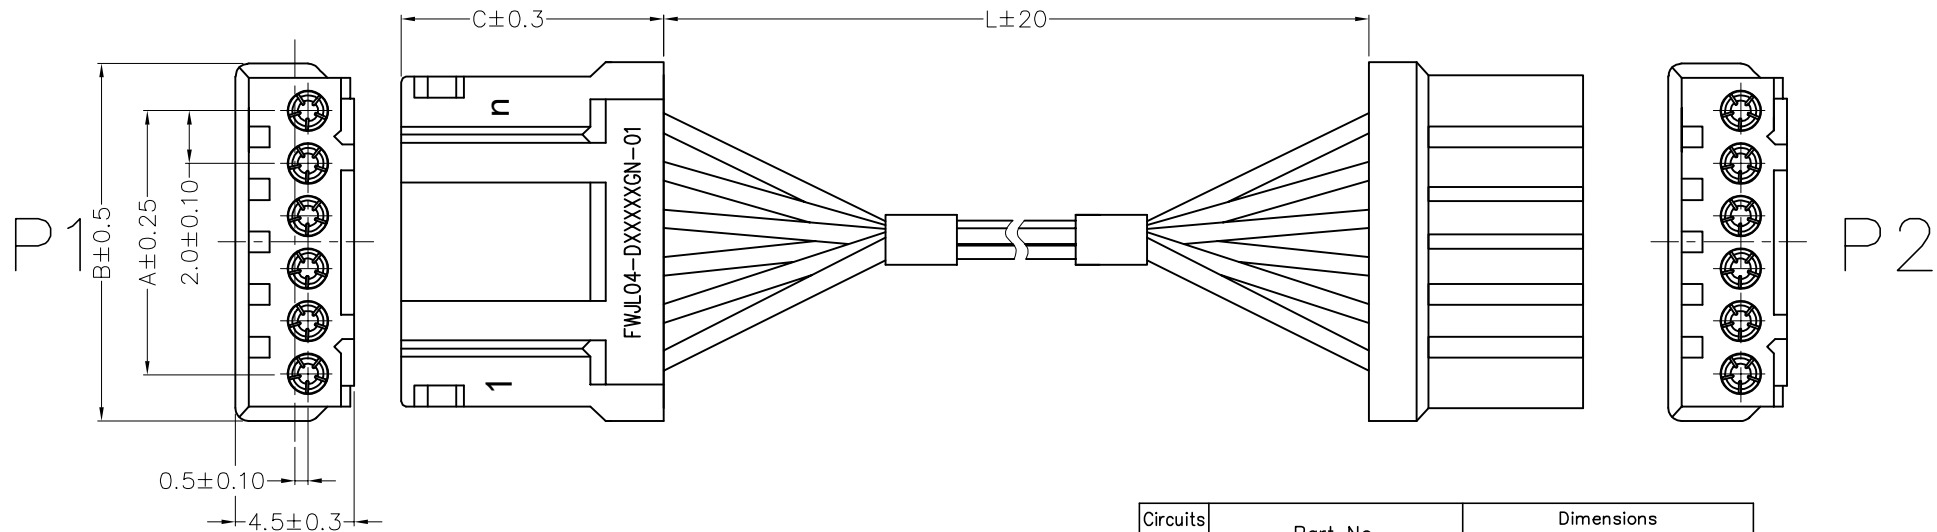

P1	P2	COLOR
1	1	GREEN
2	2	GREEN
3	3	GREEN
4	4	GREEN
...		
N	N	GREEN

Circuits (n)	Part No.	Dimensions		
		A	B	C
2	FWJL04-D02XXXGN-01	2.00	5.60	9.0
3	FWJL04-D03XXXGN-01	4.00	7.60	9.0
4	FWJL04-D04XXXGN-01	6.00	9.60	9.0
5	FWJL04-D05XXXGN-01	8.00	11.60	9.0
6	FWJL04-D06XXXGN-01	10.00	13.60	9.0

SPECIFICATIONS

Electrical

Current Rating: 1.0A
Voltage Rating: 300V AC(rms)
Contact Resistance: 12.5 mΩ Max.
Insulation Resistance: 5000 MΩ Min.
Withstanding Voltage: 1000V AC r.m.s
Temperature Range-Operating: -65°C~+125°C

Mechanical

Durability: 500 Cycles
Vibration: Frequency 10Hz~2000Hz, Acceleration 147m/s², Discontinuity 1μs Max.
Shock: Peak acceleration 980m/s², Discontinuity 1μs Max.

Material and Plating

Housing: Thermoplastic (UL 94V-0) ,Green
Terminal: Brass/ Gold Plated
Wire: AFR-250/0.15 (30/0.08), Green

Ordering Information

FWJL04 — D XX XXX GN — 01
 1 2 3 4 5

1 Category FWJL04-JL04 Cable	2 Type D-Two-way plug cable	3 Circuits XX	4 Cable Length 005-0.05M 010-0.1M (Custom length available)	5 Cable Color GN-Green
-----------------------------------	----------------------------------	--------------------	--	-----------------------------

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 28/FEB/22	PART NO. FWJL04-DXXXXXGN-01	ITEM NO. FWJL04	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 28/FEB/22	TITLE JL4 Series Cable Pitch 2mm			REV 0
	X.X ±0.20	X.X* ±2°	DRAWN BY MATT	DATE 28/FEB/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	X.XX ±0.15	X.XX* ±1°						
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX* ±0.5°					