


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

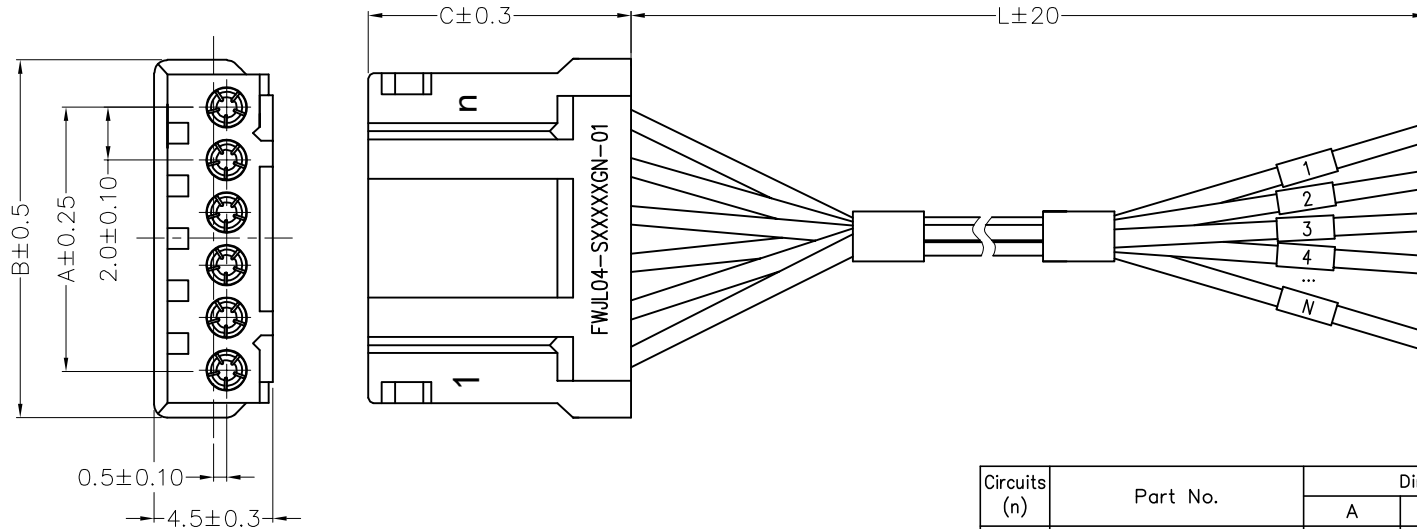

Circuits (n)	Part No.	Dimensions		
		A	B	C
2	FWJL04-S02XXXGN-01	2.00	5.60	9.0
3	FWJL04-S03XXXGN-01	4.00	7.60	9.0
4	FWJL04-S04XXXGN-01	6.00	9.60	9.0
5	FWJL04-S05XXXGN-01	8.00	11.60	9.0
6	FWJL04-S06XXXGN-01	10.00	13.60	9.0

SPECIFICATIONS

Electrical

Current Rating: 1.0A
Voltage Rating: 300V AC(rms)
Contact Resistance: 12.5 mΩ Max.
Insulation Resistance: 5000 MΩ Min.
Withstanding Voltage: 1000V AC r.m.s
Temperature Range-Operating: -65°C~+125°C

Mechanical

Durability: 500 Cycles
Vibration: Frequency 10Hz~2000Hz, Acceleration 147m/s², Discontinuity 1μs Max.
Shock: Peak acceleration 980m/s², Discontinuity 1μs Max.

Material and Plating

Housing: Thermoplastic (UL 94V-0) ,Green
Terminal: Brass/ Gold Plated
Wire: AFR-250/0.15 (30/0.08), Green

Ordering Information

FWJL04 — S XX XXX GN — 01
1 2 3 4 5

1 Category	2 Type	3 Circuits	4 Cable Length	5 Cable Color
FWJL04-JL04 Cable	S-One-way plug cable	XX	005-0.05M 010-0.1M (Custom length available)	GN-Green

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Building Technology Cornerstone
	X. ±0.30	X.* ±5°	LEO	28/FEB/22	FWJL04-SXXXXXGN-01	FWJL04	
	X.X ±0.20	X.X* ±2°	CHECKED BY	DATE	TITLE		
	X.XX ±0.15	X.XX* ±1°	GISELLE	28/FEB/22	JL4 Series Cable Pitch 2mm		
SCALE	SIZE	X.XXX ±0.10	X.XXX* ±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			MATT	28/FEB/22	REV 0	SHEET NO. 1/1