


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

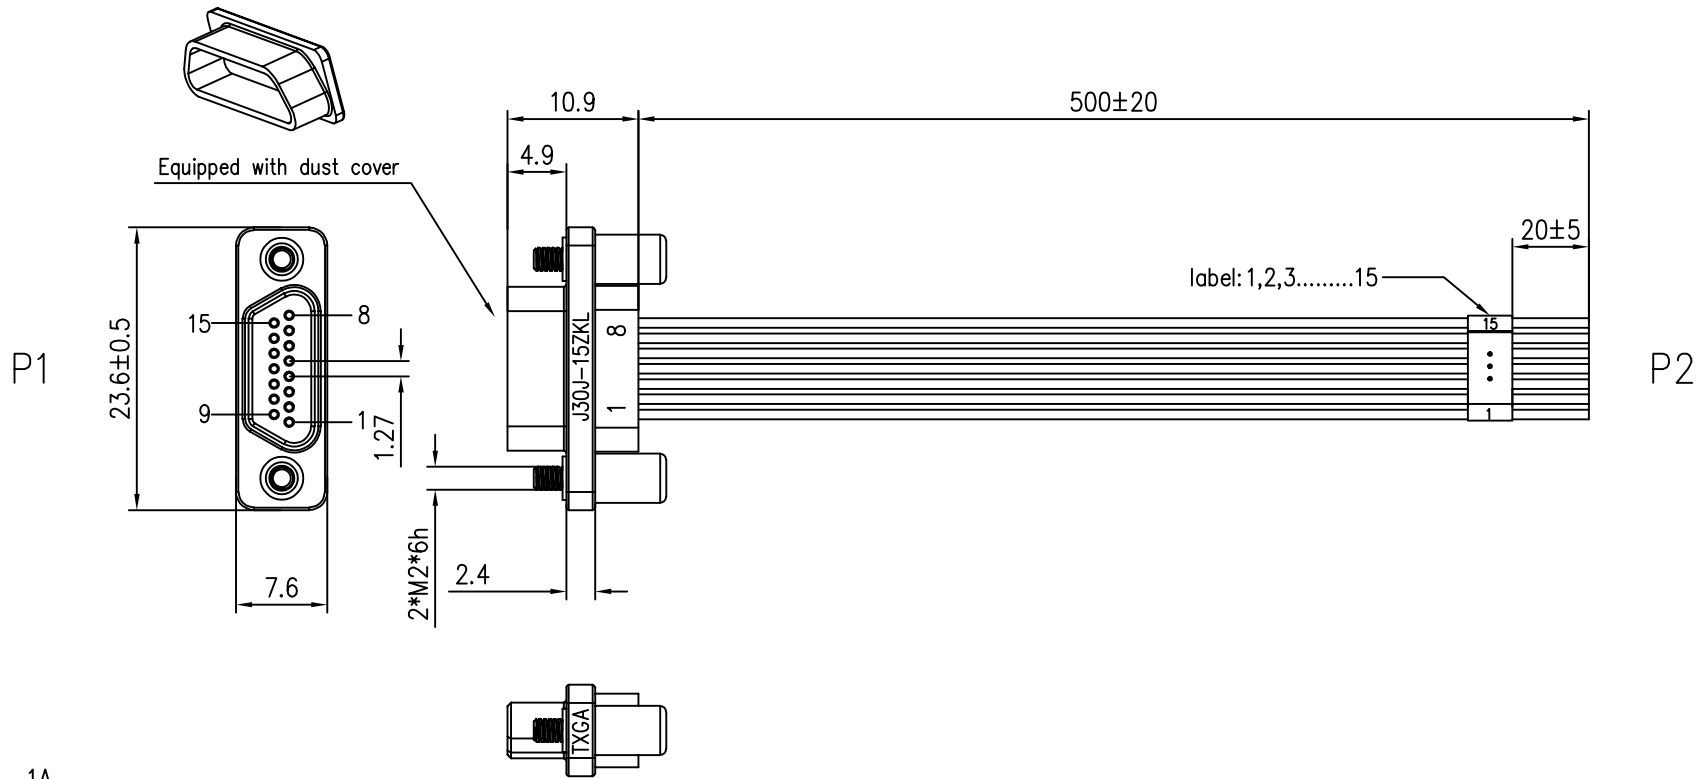

Specifications

Electrical

- Current Rating: 1A
- Voltage Rating: 300V AC(rms)
- Contact Resistance: 10mΩ (MAX)
- Insulation Resistance: 5000MΩ (MIN)
- Temperature Range-Operating: -55°C~+125°C

Mechanical

- Durability: 500 Cycles
- Vibration: Frequency 10~2000Hz, Acceleration 196m/s², Discontinuity 1μs Max.
- Shock: Peak Acceleration 735m/s², Discontinuity 1μs Max.

Material and Plating

- Shell: Aluminum alloy /plated Nickel
- Terminal: Copper alloy /plated Gold
- Wire: Afr250 0.12mm² White

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 14/Aug/23	PART NO. FWMD0-S0150500-001	ITEM NO. FWMD0	 Building Technology Cornerstone
	X. ±0.30	X.' ±5'	CHECKED BY GISELLE	DATE 14/Aug/23	TITLE Micro-D Connector, One-way plug cable, 15Circuits, Female		
DESIGN UNITS METRIC	X.X ±0.20	X.X' ±2'	DRAWN BY TANG	DATE 14/Aug/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'				
		X.XXX ±0.10	X.XXX' ±0.5'				