


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

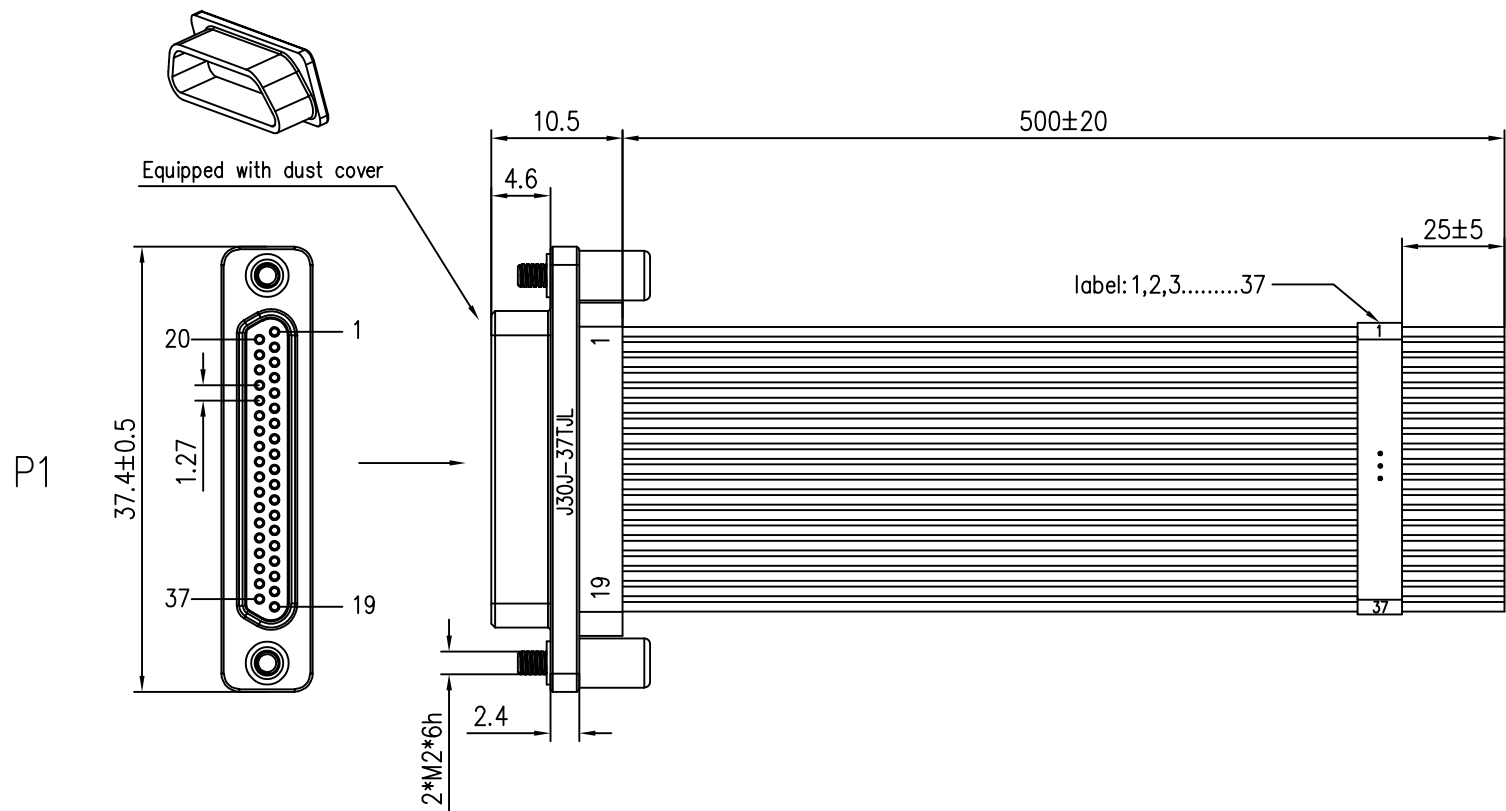

Specifications

Electrical
 Current Rating: 1A
 Voltage Rating: 300V AC(rms)
 Contact Resistance: 10mΩ (MAX)
 Insulation Resistance: 5000MΩ (MIN)
 Temperature Range-Operating: -55°C~+125°C

Mechanical
 Durability: 500 Cycles
 Vibration: Frequency 10~2000Hz, Acceleration 196m/s², Discontinuity 1μs Max.
 Shock: Peak Acceleration 735m/s², Discontinuity 1μs Max.

Material and Plating
 Shell: Aluminum alloy /plated Nickel
 Terminal: Copper alloy /plated Gold
 Wire: Afr250 0.12mm² White

 THIRD ANGLE PROJECTION DESIGN UNITS METRIC SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Building Technology Cornerstone
	X. ±0.30	X.' ±5'	LEO	14/Aug/23	FWMDO-S0370500-001	FWMDO	
	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE Micro-D Connector, One-way plug cable, 37Circuits, Male		REV 0 SHEET NO. 1/1
	X.XX ±0.15	X.XX' ±1'	GISELLE	14/Aug/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY TANG	DATE 14/Aug/23			