
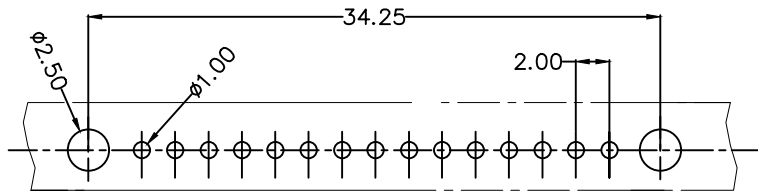


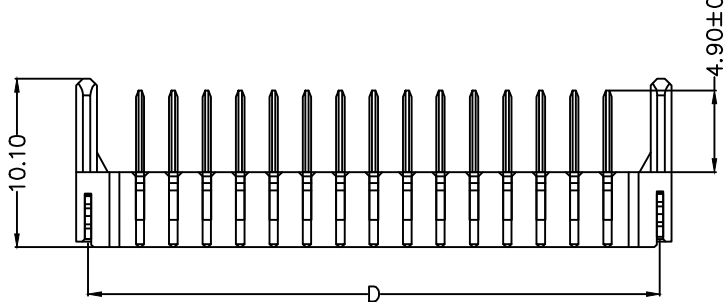


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current Rating: 7A AC(rms)/DC
 Instant Current: 10A AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 100 MΩ Min
 Withstanding Voltage: 500V AC r.m.s
 Operating Temperature: -40°C~+105°C
 Material and plating
 Housing: PA9T (UL 94V-0)
 Contacts: Phosphor Bronze/Gold plated

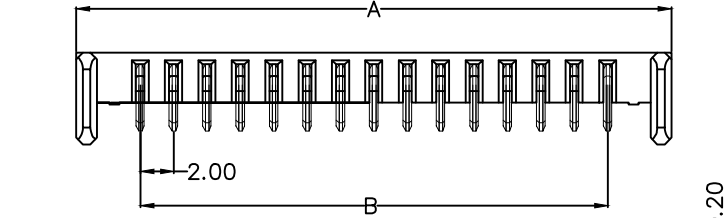

Recommended P.C.Board Layout
 General tolerances:±0.05

Ordering Information

FBA 200 08 — S XX B 1 XX 5 L
 1 2 3 4 5 6 7 8 9 10



1	Category FBA-Battery Holder	2	Series Number 200-Pitch2.00mm	3	Distinction No. 08	4	Row Option S-Single Row	5	Circuits XX
6	Entry Angle B-90° Angle	7	Plating 1-Gold plated	8	Thickness of Plating 00-Gold Flash	9	Material-Resin 5-PA9T	10	Packaging L-Tube

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.30 X.* ±5° X.X ±0.20 X.X* ±2° X.XX ±0.15 X.XX* ±1° X.XXX ±0.10 X.XXX* ±0.5°		APPROVE BY LEO	DATE 19/Sept/23	PART NO. FBA20008-SXXB1XX5L	ITEM NO. FBA20008	<p>Building Technology Cornerstone</p>
	DESIGN UNITS mm	CHECKED BY GISELLE	DATE 19/Sept/23	TITLE Battery Connector Pitch 2.0mm 90° Angle(DIP)		REV 0	
SCALE 5:1	SIZE A4	DRAWN BY Hejianpeng	DATE 19/Sept/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part NO.	Dimensions			
		A	B	C	D
03	FBA20008-S03B1XX5L	11.65	4.00	9.15	10.25
04	FBA20008-S04B1XX5L	13.65	6.00	11.15	12.25
05	FBA20008-S05B1XX5L	15.65	8.00	13.15	14.25
06	FBA20008-S06B1XX5L	17.65	10.00	15.15	16.25
07	FBA20008-S07B1XX5L	19.65	12.00	17.15	18.25
08	FBA20008-S08B1XX5L	21.65	14.00	19.15	20.25
09	FBA20008-S09B1XX5L	23.65	16.00	21.15	22.25
10	FBA20008-S10B1XX5L	25.65	18.00	23.15	24.25
11	FBA20008-S11B1XX5L	27.65	20.00	25.15	26.25
12	FBA20008-S12B1XX5L	29.65	22.00	27.15	28.25
13	FBA20008-S13B1XX5L	31.65	24.00	29.15	30.25
14	FBA20008-S14B1XX5L	33.65	26.00	31.15	32.25

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 19/Sept/23	PART NO. FBA20008-SXXB1XX5L	ITEM NO. FBA20008	 Building Technology Cornerstone
	DESIGN UNITS mm	X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 19/Sept/23	TITLE Battery Connecdor Pitch 2.0mm 90° Angle(DIP)	
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY Hejianpeng	DATE 19/Sept/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX ±0.10	X.XXX* ±0.5°			REV 0	SHEET NO. 2/2

1 2 3 4 5 6 7 8