

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS





Electrical

Current Rating: 2A AC(rms)/DC  
 Contact Resistance: 20 mΩ Max.  
 Insulation Resistance: 1000 MΩ Min.  
 Withstanding Voltage: 1000V AC r.m.s  
 Temperature Range-Operating: -55°C~+105°C

Material and Plating

Housing: PBT (UL 94V-0)  
 Contacts: Brass/ Selective gold on contact area,  
 Matte-tin on tail

Code	No. of Contacts	Contact Arrangement
A	32	
B	16	
C	16	

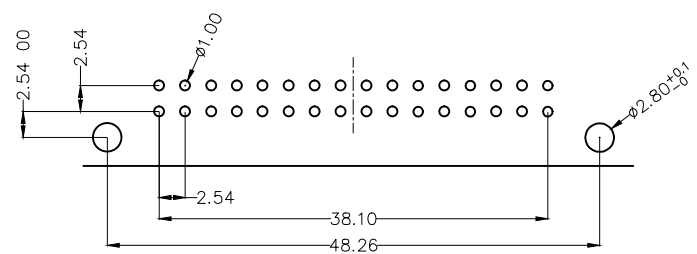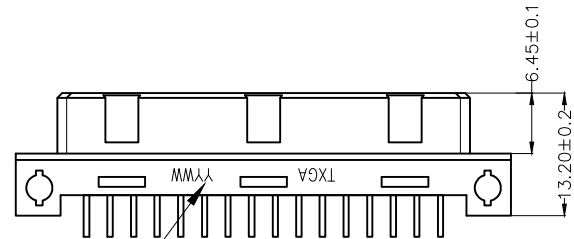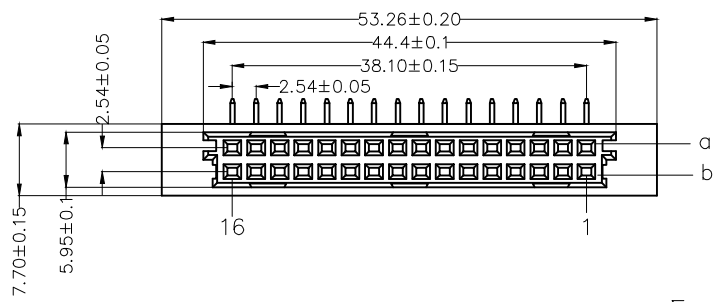

Recommended P.C.Board Layout  
 General Tolerances: ±0.05mm

Ordering Information

FES 254 26 - F D XX B 3 XX 1 GY K X-X  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14

1 Category FES-European style socket	2 Series Number 254-Pitch2.54mm	3 Distinction No. 26	4 Type F-Female	5 Row Option D-Double row	6 Circuits XX	7 Entry Angle B-90° Angle
8 Plating 3-Gold on contact Matte-tin on tail	9 Thickness of Gold Plating 01-1μ" 10-10μ" 15-15μ" Custom plate available	10 Material-Resin 1-PBT	11 Color-Resin GY-Grey	12 Packaging K-Tray	13 Code A-A D-D B-B E-E C-C F-F	14 Type H=3.0mm-A H=4.4mm-B H=13.0mm-C

 THIRD ANGLE PROJECTION DESIGN UNITS METRIC SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.30 X.* ±5° X.X ±0.20 X.X* ±2° X.XX ±0.15 X.XX* ±1° X.XXX ±0.10 X.XXX* ±0.5°		APPROVE BY LEO DATE 14/FEB/23	PART NO. FES25426-FDXXB3XX1GYKX-X DATE 14/FEB/23	ITEM NO. FES25426 TITLE European style socket Pitch 2.54mm 90° Angle(Female)	 Building Technology Cornerstone REV 0 SHEET NO. 1/1
	DRAWN BY CHERRY DATE 14/FEB/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				